

10055comp02-03-ind02.rvt

METER REPLACEMENT NOTES

- 1. CONTRACTOR SHALL NOTIFY THE AUTHORITY AT LEAST TEN (10) BUSINESS DAYS PRIOR TO BEGINNING ANY SERVICE CHANGES.
2. ALL PROPOSED SERVICE LINES, WATER METER SETTERS, IDLERS, AND BOXES SHALL BE INSTALLED BEFORE PROPOSED MAINLINE IS FILLED FOR TESTING AND FLUSHING...

GENERAL UTILITY NOTES

- 1. ALL CONSTRUCTION METHODS AND MATERIALS SHALL CONFORM TO THE LATEST EDITION OF THE DESIGN AND CONSTRUCTION STANDARDS AND SPECIFICATIONS OF THE WESTERN VIRGINIA WATER AUTHORITY (AUTHORITY) AVAILABLE AT WWW.WESTERNVIAWATER.ORG...
2. THE AUTHORITY WILL INSTALL ALL NEW WATER METERS AND REMOVE ALL EXISTING WATER METERS...

WATERLINE NOTES

- 1. INSTALL WATERLINE AND APPURTENANCES IN ACCORDANCE WITH THE DETAILS SHOWN ON THESE DRAWINGS AND ALL OTHER AUTHORITY REGULATIONS.
2. A TYPICAL MINIMUM COVER OF THREE (3) FEET IS REQUIRED OVER PROPOSED WATERLINES UNLESS OTHERWISE INDICATED ON PLANS.

LEGEND table with columns for ITEM, EXISTING, and PROPOSED. Includes symbols for Pavement, Curb and Gutter, Storm Drain Line, Sanitary Sewer Manhole, Waterline, Hydrant, Gate Valve, Underground Electric Line, Overhead Electric Line, Underground Telephone Line, Underground Gas Line, Utility Pole, Fence, Contours, Spot Elevation, and Tree Line.

ABBREVIATIONS table listing various utility and construction terms such as D.E., W.L.E., S.S.E., P.U.E., ESM/T, M.B.L., R/W, VAR., EX., D.B., P.B., PG., No., TYP., STA., LT., RT., RCP, CMP, CPP, PVC, DIP, SD, SMH, SS, SSMH, W, and their corresponding full names.

LUMSDEN ASSOCIATES, P.C. ENGINEERS-SURVEYORS-PLANNERS ROANOKE, VIRGINIA. Includes contact information: PHONE: (540) 774-4411, FAX: (540) 772-9445, E-MAIL: MAIL@LUMSDENPC.COM.


Professional Engineer seal for Douglas E. Burton, No. 039740, dated 4-28-11.

NOTES AND DETAILS

ARLINGTON HILLS WATERLINE REPLACEMENTS PREPARED FOR WESTERN VIRGINIA WATER AUTHORITY CAVE SPRING MAGISTERIAL DISTRICT ROANOKE COUNTY, VIRGINIA

Table with columns for REVISIONS (NO., DATE, DESCRIPTION) and a table for DATE (April 28, 2011), SCALE (AS SHOWN), COMMISSION NO. (10-055), and SHEET (3 OF 13).


Approved for construction stamp: Earl Smith, APPROVED FOR CONSTRUCTION WESTERN VIRGINIA WATER AUTHORITY

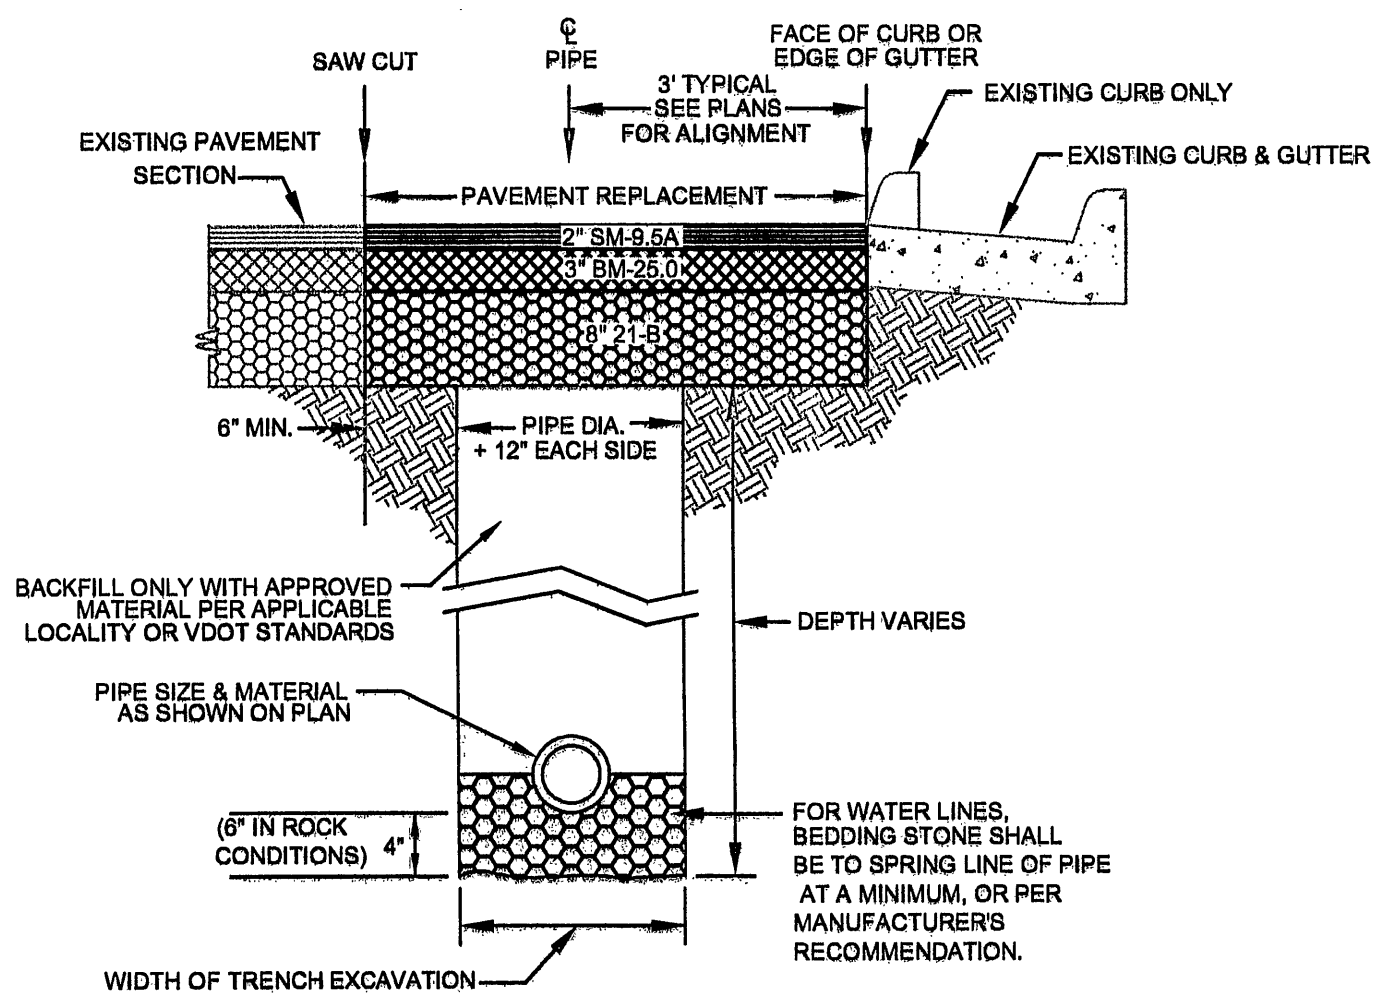

SEE ALSO DETAIL W-25 ON SHEET 12

INSTALLATION ALONG CURB AND GUTTER, OR CURB ONLY, SECTIONS

NO SCALE

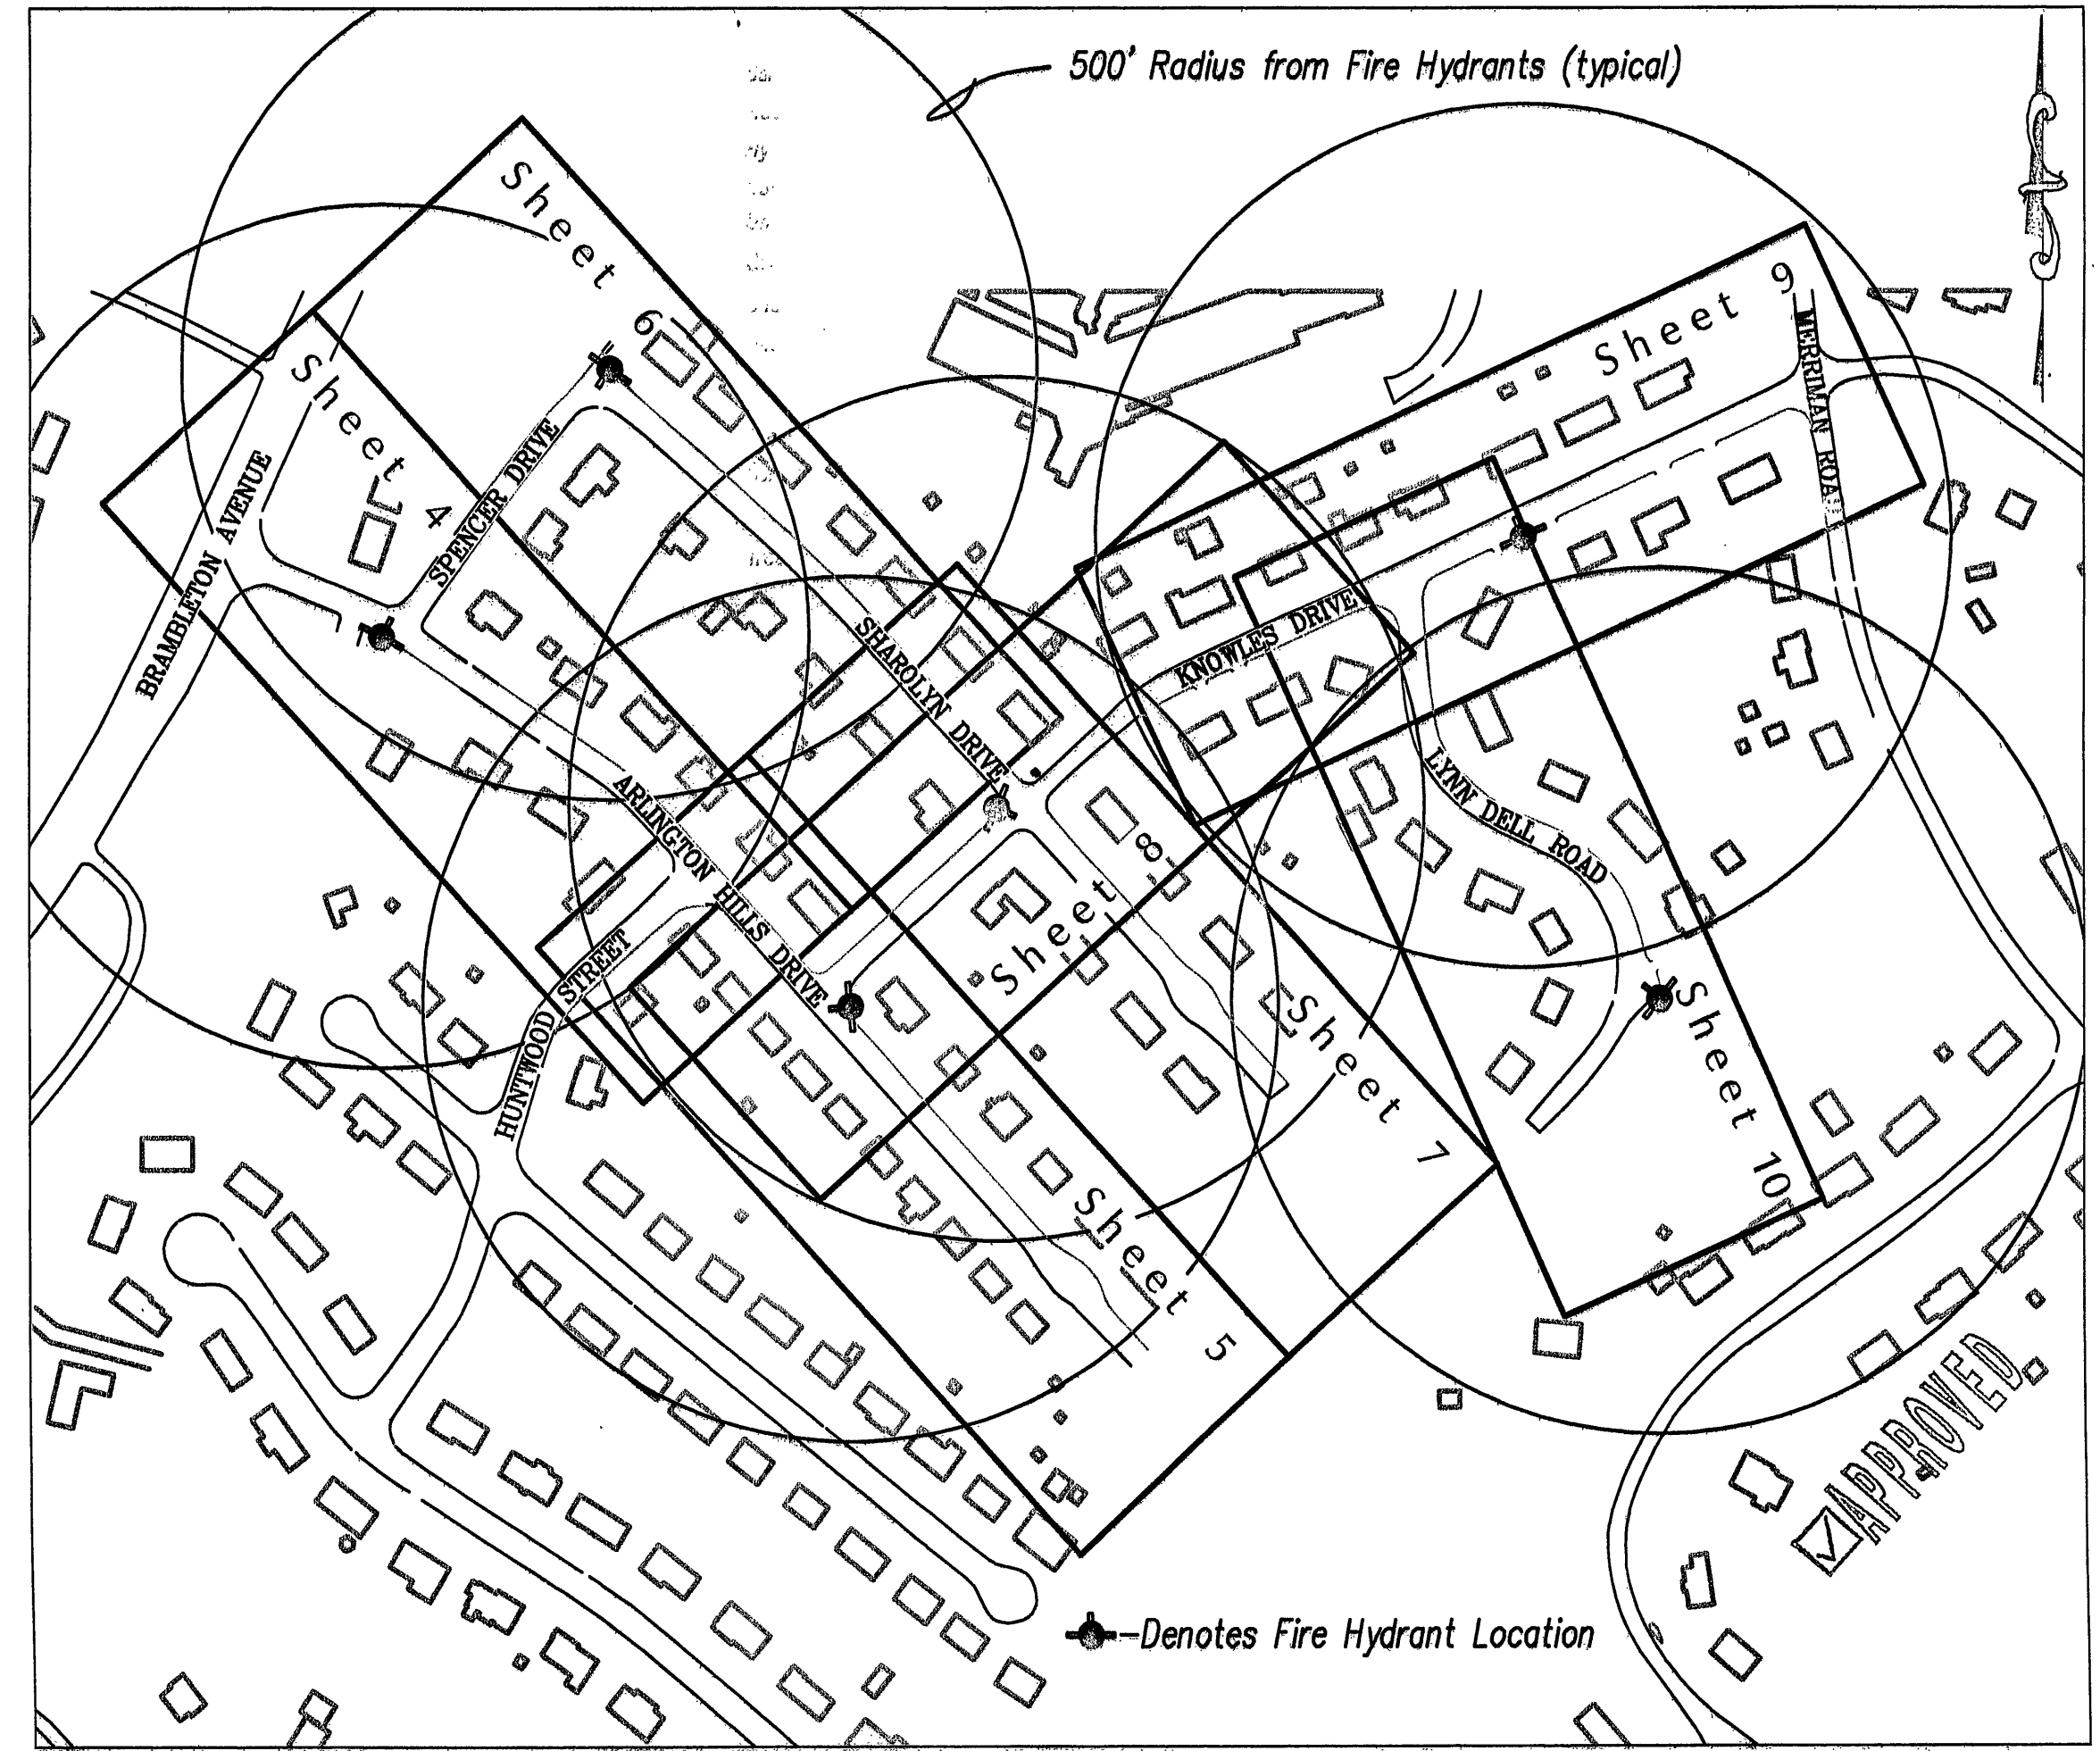

SHEET LAYOUT AND FIRE HYDRANT LOCATION

1" = 200'

w:\drawings\2010\10055\eng\10055comp02.dwg