


Note: All metered service connections shall include a backflow check valve in the discharge line.

Note: Before starting construction the contractor shall contact Mr. H.M. Smythers of the Appalachian Power Company for the exact location of all buried power lines at: (703)-344-1411 ext. 688.

Note: 1000' Grid based on Virginia State Plane Coordinate System South Zone 1987 N.A. Datum Vertical Datum - 1929 G.A.

NOTE: ROCK QUANTITIES ARE AN ENGINEER'S ESTIMATE ONLY. THEY ARE TO BE USED BY THE CONTRACTOR AS AN AID TO PRICING THE LINework.

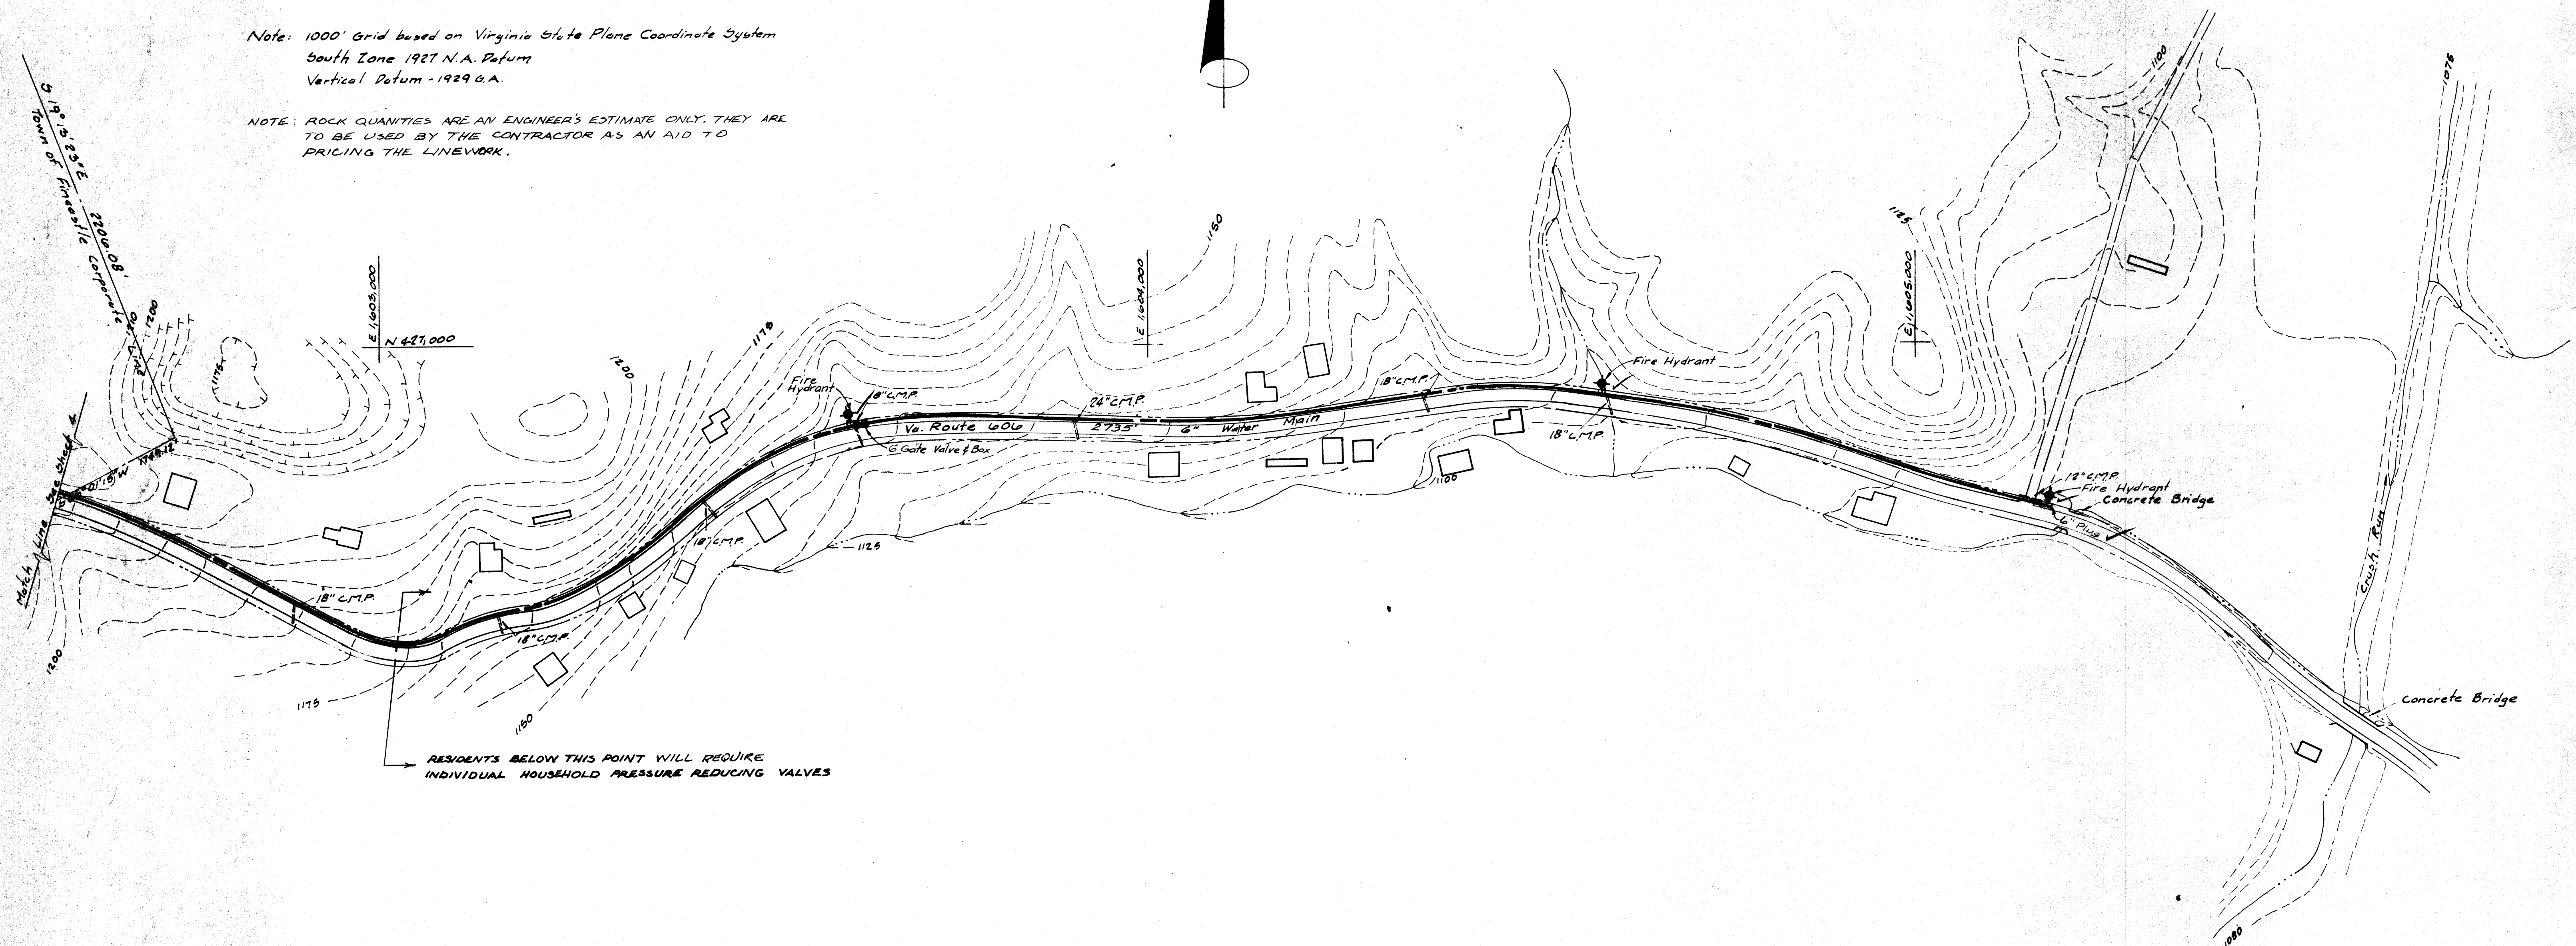

TAKE OFF

1) 6" WATER MAIN	2735
2) 6" GATE VALVES	1
3) FIRE HYDRANTS	3
4) METERED SERVICE CONNECTIONS	
SAME SIDE OF ROAD	7
OPPOSITE SIDE OF ROAD	12
5) ROCK (20%)	91 CU. YDS.
6) SEEDING	456 SQ. YDS.
7) CONCRETE LEFT IN TRENCH	1/4 CU. YDS.
8) HOUSEHOLD P.R.V.'S	17