
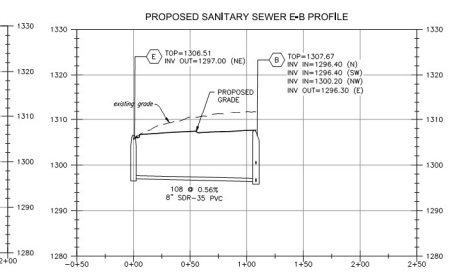
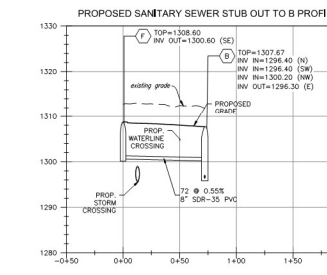
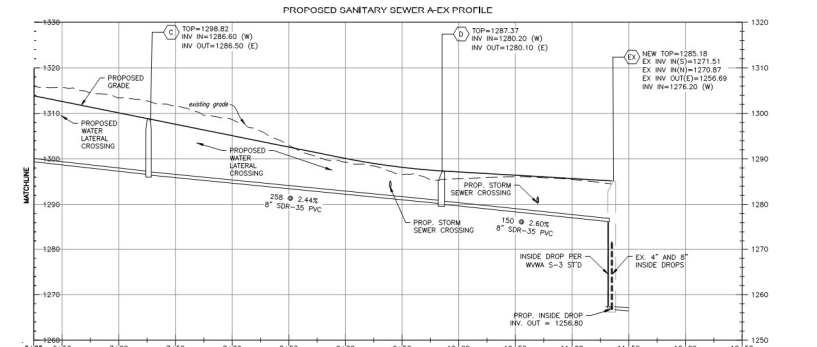
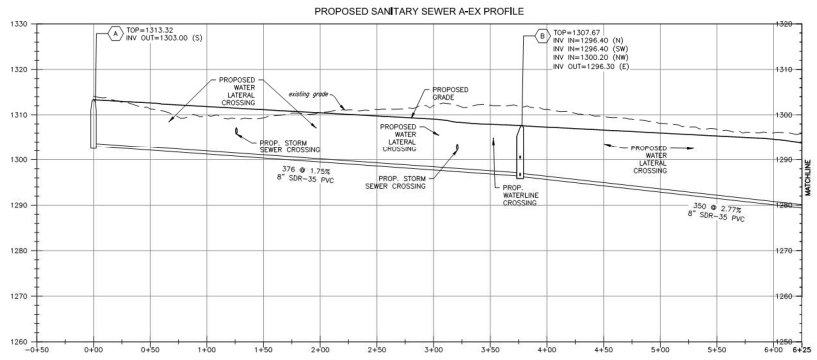


SANITARY SEWER SCHEDULE:

- A PUBLIC S.S. MANHOLE
TOP= 1313.32
INV IN= 1303.10 (LATERAL)
INV IN= 1303.10 (LATERAL)
INV IN= 1303.10 (LATERAL)
INV OUT= 1303.00
- B 376 LF OF 8" SDR-35 PVC AT 1.91%
TOP= 1307.67
INV IN= 1296.40 (N)
INV IN= 1296.40 (SW)
INV IN= 1300.20 (W)
INV OUT= 1296.30 (E)
- C 350 LF OF 8" SDR-35 PVC AT 1.66%
PUBLIC S.S. MANHOLE
TOP= 1298.82
INV IN= 1288.40 (W)
INV OUT= 1286.50 (E)
- D 258 LF OF 8" SDR-35 PVC AT 3.00%
PUBLIC S.S. MANHOLE
TOP= 1297.77
INV IN= 1280.20 (W)
INV OUT= 1280.10 (E)
- E 150 LF OF 8" SDR-35 PVC AT 5.11%
EXISTING PUBLIC S.S. MANHOLE
NEW TOP= 1285.18
EX INV IN= 1271.51 (S)
EX INV IN= 1271.21 (N)
EX INV IN= 1276.20 (W/OUTSIDE DROP)
EX INV OUT= 1256.69 (E)
- F PUBLIC S.S. MANHOLE
TOP= 1306.51
INV OUT= 1297.00 (E)
- G 108 LF OF 8" SDR-35 PVC AT 0.56%
PUBLIC S.S. MANHOLE
TOP= 1306.60
INV IN= 1300.60 (E)
- H 72 LF OF 8" SDR-35 PVC AT 0.55%

NOTES:
1. C.C. TO CONFIRM & COORDINATE ALL BUILDING
TE-IN LOCATIONS WITH M.E.P. AND ARCHITECTURAL
DRAWINGS PRIOR TO CONSTRUCTION OF LATERALS.
2. C.C. TO CONFIRM ALL TE-IN LOCATIONS TO
EXISTING LINES PRIOR TO CONSTRUCTION AND NOTIFY
THE ENGINEER OF ANY DISCREPANCIES.
3. C.C. SHALL CORE DRILL EXISTING MANHOLE AND
PROVIDE FLEXIBLE BOOT CONNECTION FOR PROPOSED
TE-IN CONNECTION.
4. C.C. SHALL ENSURE THAT MANHOLE RINGS LOCATED
WITHIN PROPOSED ROADWAY ARE FLUSH WITH
PAVEMENT SURFACE AND NOT PLACED WITHIN WHEEL
PATH OF VEHICLE.

SANITARY SEWER LATERAL TABLE					
CHEROKEE HILLS SECTION 6					
Station	Manhole	Distance	Start of Run	Top of Man	Minimum Elev.
1	D	151	1279.4	1283.3	1283.3
2	D	63	1277.9	1278.0	1281.6
3	D	283	1281.5	1282.3	1281.2
4	D	183	1281.5	1282.3	1280.2
5	D	303	1281.5	1282.3	1280.6
6	C	81	1281.0	1281.7	1281.7
7	C	91	1280.8	1281.7	1281.7
8	C	100	1281.2	1281.5	1281.5
9	B	206	1281.5	1281.5	1280.6
10	B	206	1281.5	1281.5	1280.6
11	B	206	1281.5	1281.5	1280.6
12	B	206	1281.5	1281.5	1280.6
13	B	206	1281.5	1281.5	1280.6
14	B	206	1281.5	1281.5	1280.6
15	A	8	1280.0	1280.7	1280.7
16	A	8	1280.0	1280.7	1280.7
17	A	8	1280.0	1280.7	1280.7
18	A	8	1280.0	1280.7	1280.7
19	A	8	1280.0	1280.7	1280.7
20	A	8	1280.0	1280.7	1280.7
21	B	240	1280.8	1281.1	1280.5
22	B	103	1281.3	1281.3	1281.3
23	B	180	1281.3	1281.3	1281.3
24	B	180	1281.3	1281.3	1281.3
25	C	253	1281.2	1281.4	1280.4
26	C	253	1281.2	1281.4	1280.4
27	C	180	1281.2	1281.4	1280.4
28	C	120	1281.2	1281.4	1280.4
29	C	11	1281.7	1281.4	1281.4
30	C	11	1281.7	1281.4	1281.4
31	D	240	1281.2	1281.3	1280.5
32	D	240	1281.2	1281.3	1280.5
33	D	120	1281.4	1281.3	1280.5



BALZER & ASSOCIATES, INC.
PLANNERS / ARCHITECTS
ENGINEERS / SURVEYORS
1208 Corporate Center
Roanoke, VA 24018
(540) 781-0500



CHEROKEE HILLS
SECTION 6
SANITARY SEWER PROFILES

DESIGNED BY: KAM
CHECKED BY: KAM
DATE: 12/05/23
SCALE: AS SHOWN
PROJECT NO: 24000000

C6.4

APPROVED, 9/12/2023