



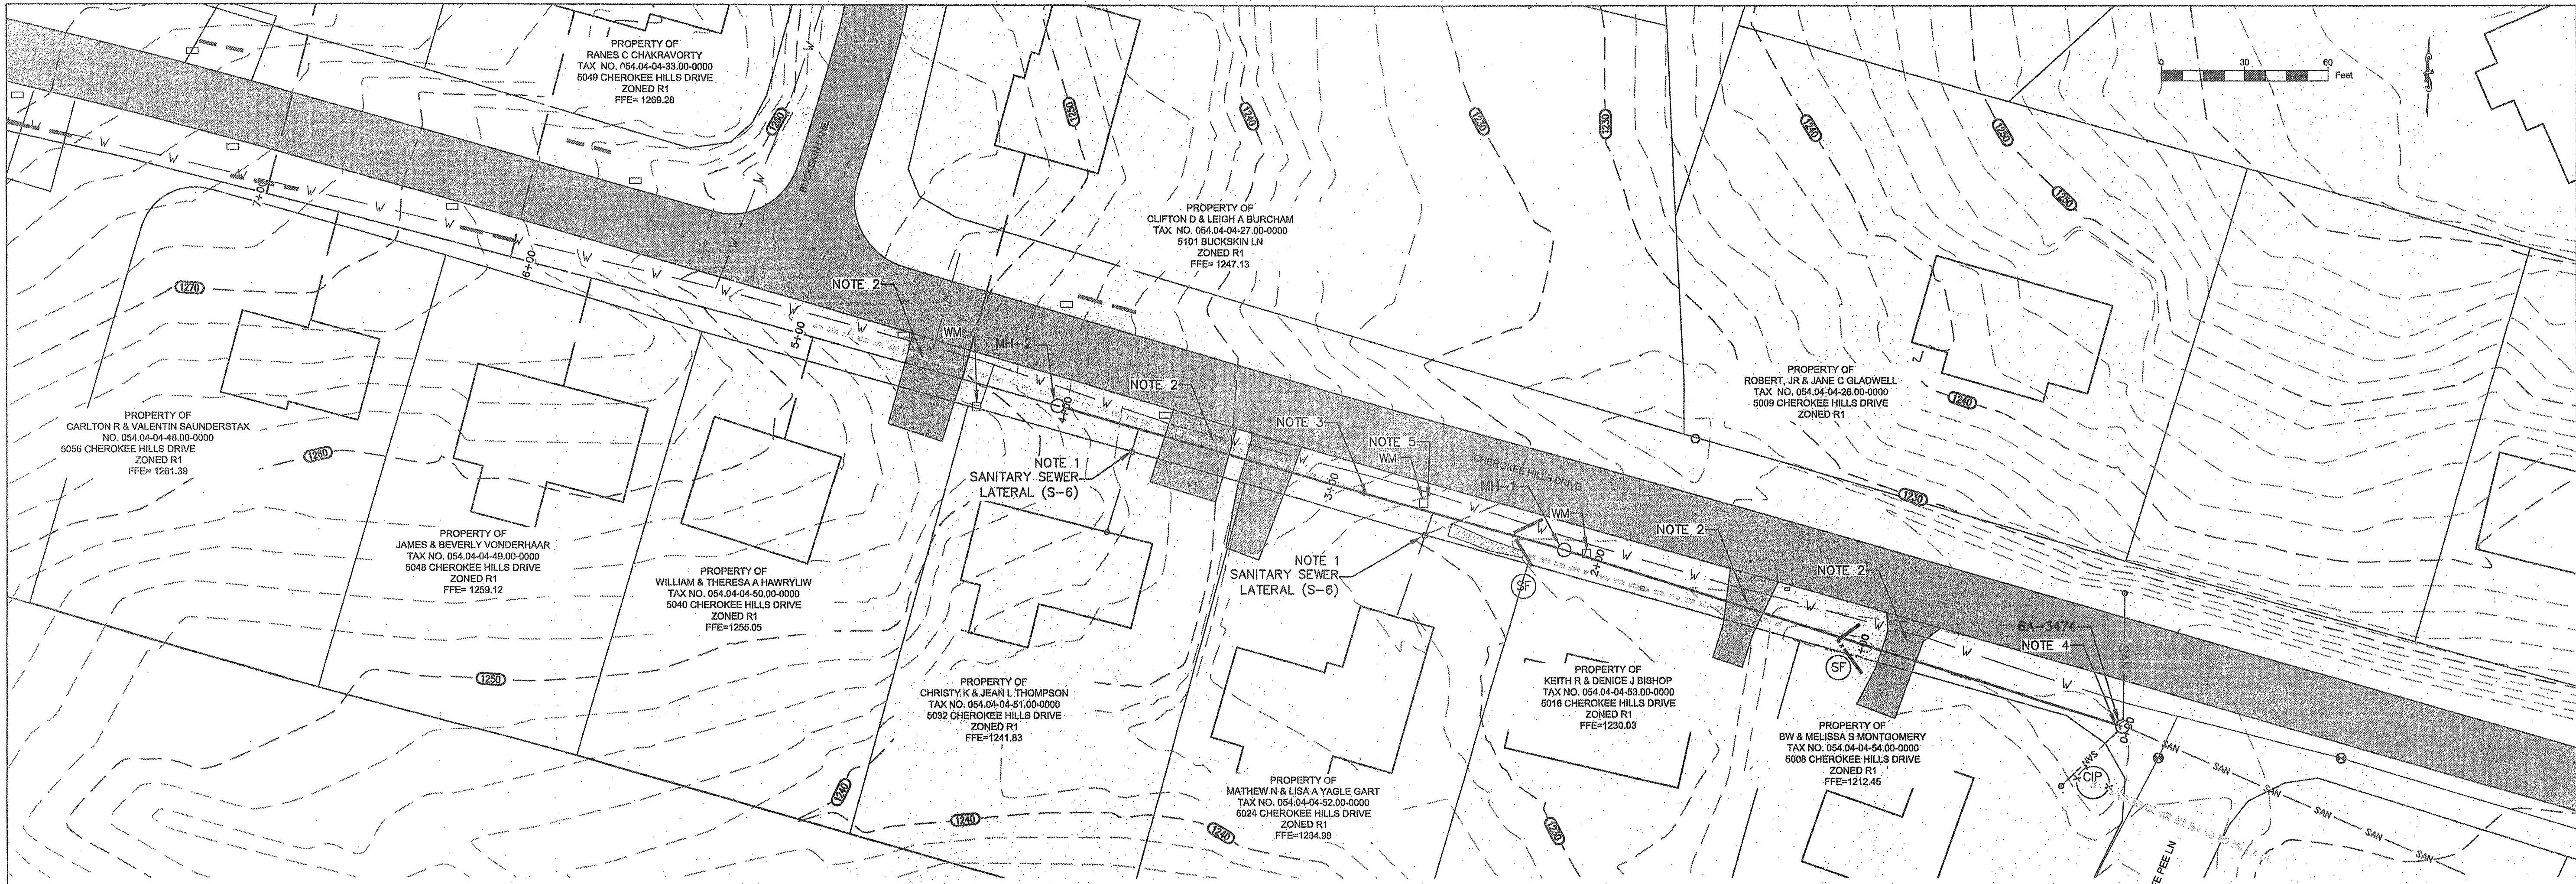


CONSTRUCTION NOTES

1. CONTRACTOR SHALL COORDINATE CLEANOUT LOCATION WITH OWNER'S CONTRACTOR. FINAL INVERT ELEVATION AT PROPERTY LINE MUST BE DETERMINED BY OWNER'S CONTRACTOR. MINIMUM GRADE ON SEWER LATERAL SHALL BE A MINIMUM OF 2%.
2. ALL DRIVEWAYS, CULVERTS & MAILBOXES MUST BE RESTORED TO EXISTING CONDITIONS AFTER SEWER LINE INSTALLATION IS COMPLETED. ANY CHANGES TO EXISTING CONDITIONS MUST BE APPROVED BY VDOT AND WWA.
3. EXISTING DROP INLET MUST BE PROTECTED DURING CONSTRUCTION. ANY DAMAGE TO EXISTING DROP INLET OR ADJACENT CONCRETE PIPE MUST BE REPAIRED OR REPLACED BY CONTRACTOR TO CURRENT CONDITIONS.
4. CONTRACTOR SHALL EXCAVATE EXISTING STUB OUT AT EXISTING MANHOLE 6A-3474. CONTRACTOR TO MAKE CONNECTION TO EXISTING STUB OUT. WWA INSPECTOR MUST VERIFY CONNECTION PRIOR TO BACK FILL.
5. CONTRACTOR TO PROTECT WATER METERS AND SERVICES DURING CONSTRUCTION.
6. ALL UTILITY CROSSINGS MUST MAINTAIN 18" OF VERTICAL CLEARANCE OR ADDITIONAL MEASURES MUST BE TAKEN (SEE WWA DETAIL G-4).

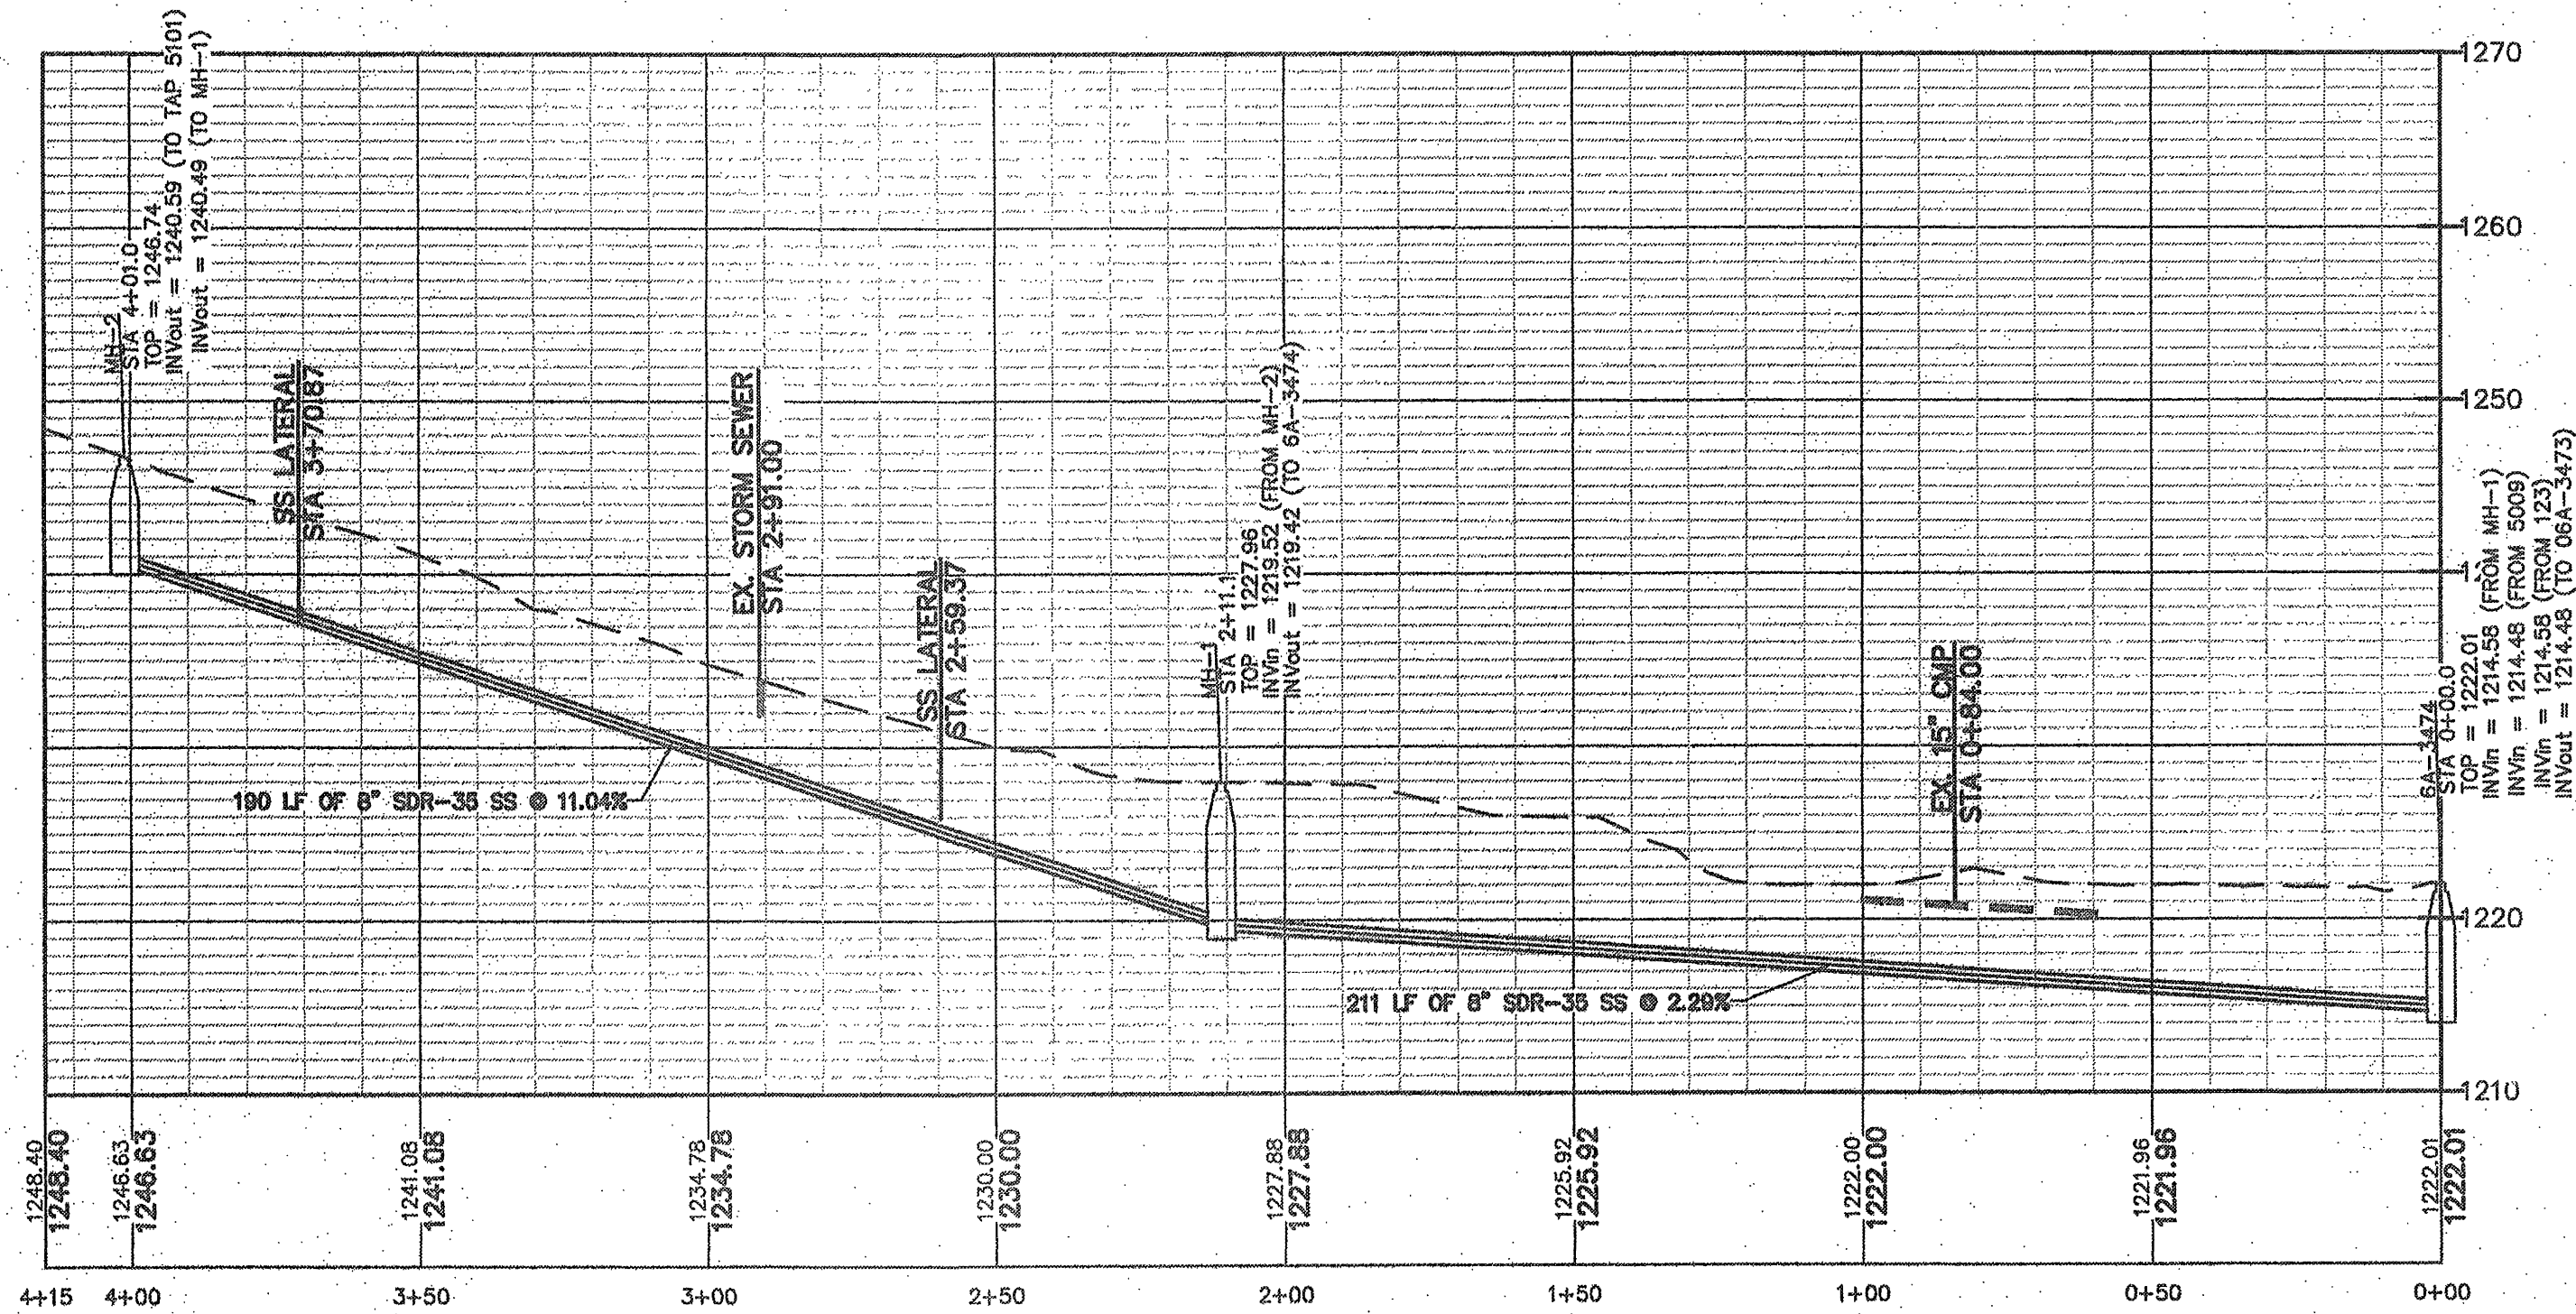


CHEROKEE HILLS-5000 BLOCK
SCALE
VERTICAL: 1" = 10'
HORIZONTAL: 1" = 30'

WESTERN VIRGINIA

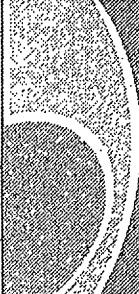**WATER AUTHORITY**

ENGINEERING SERVICES
601 S JEFFERSON ST, SUITE 300
ROANOKE, VA 24011
540-853-5641 or 540-853-5770

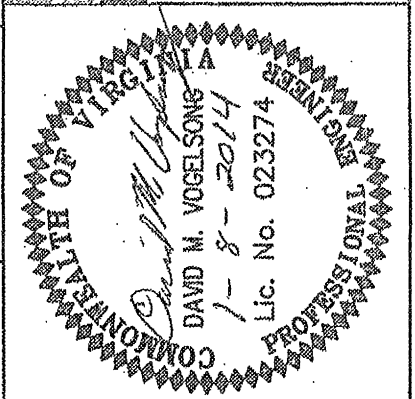

DAVID M. VOELKING
1-8-2027
U.C. No. 023274
PROFESSIONAL

CHEROKEE HILLS SEWER

PLAN & PROFILE 5000 BLOCK

Rev	Description	Date	By

Designed: AAS

Drawn: AAS

Checked:

Approved:

Date: 1-1-14

Project:

Sheet 3 of 4