



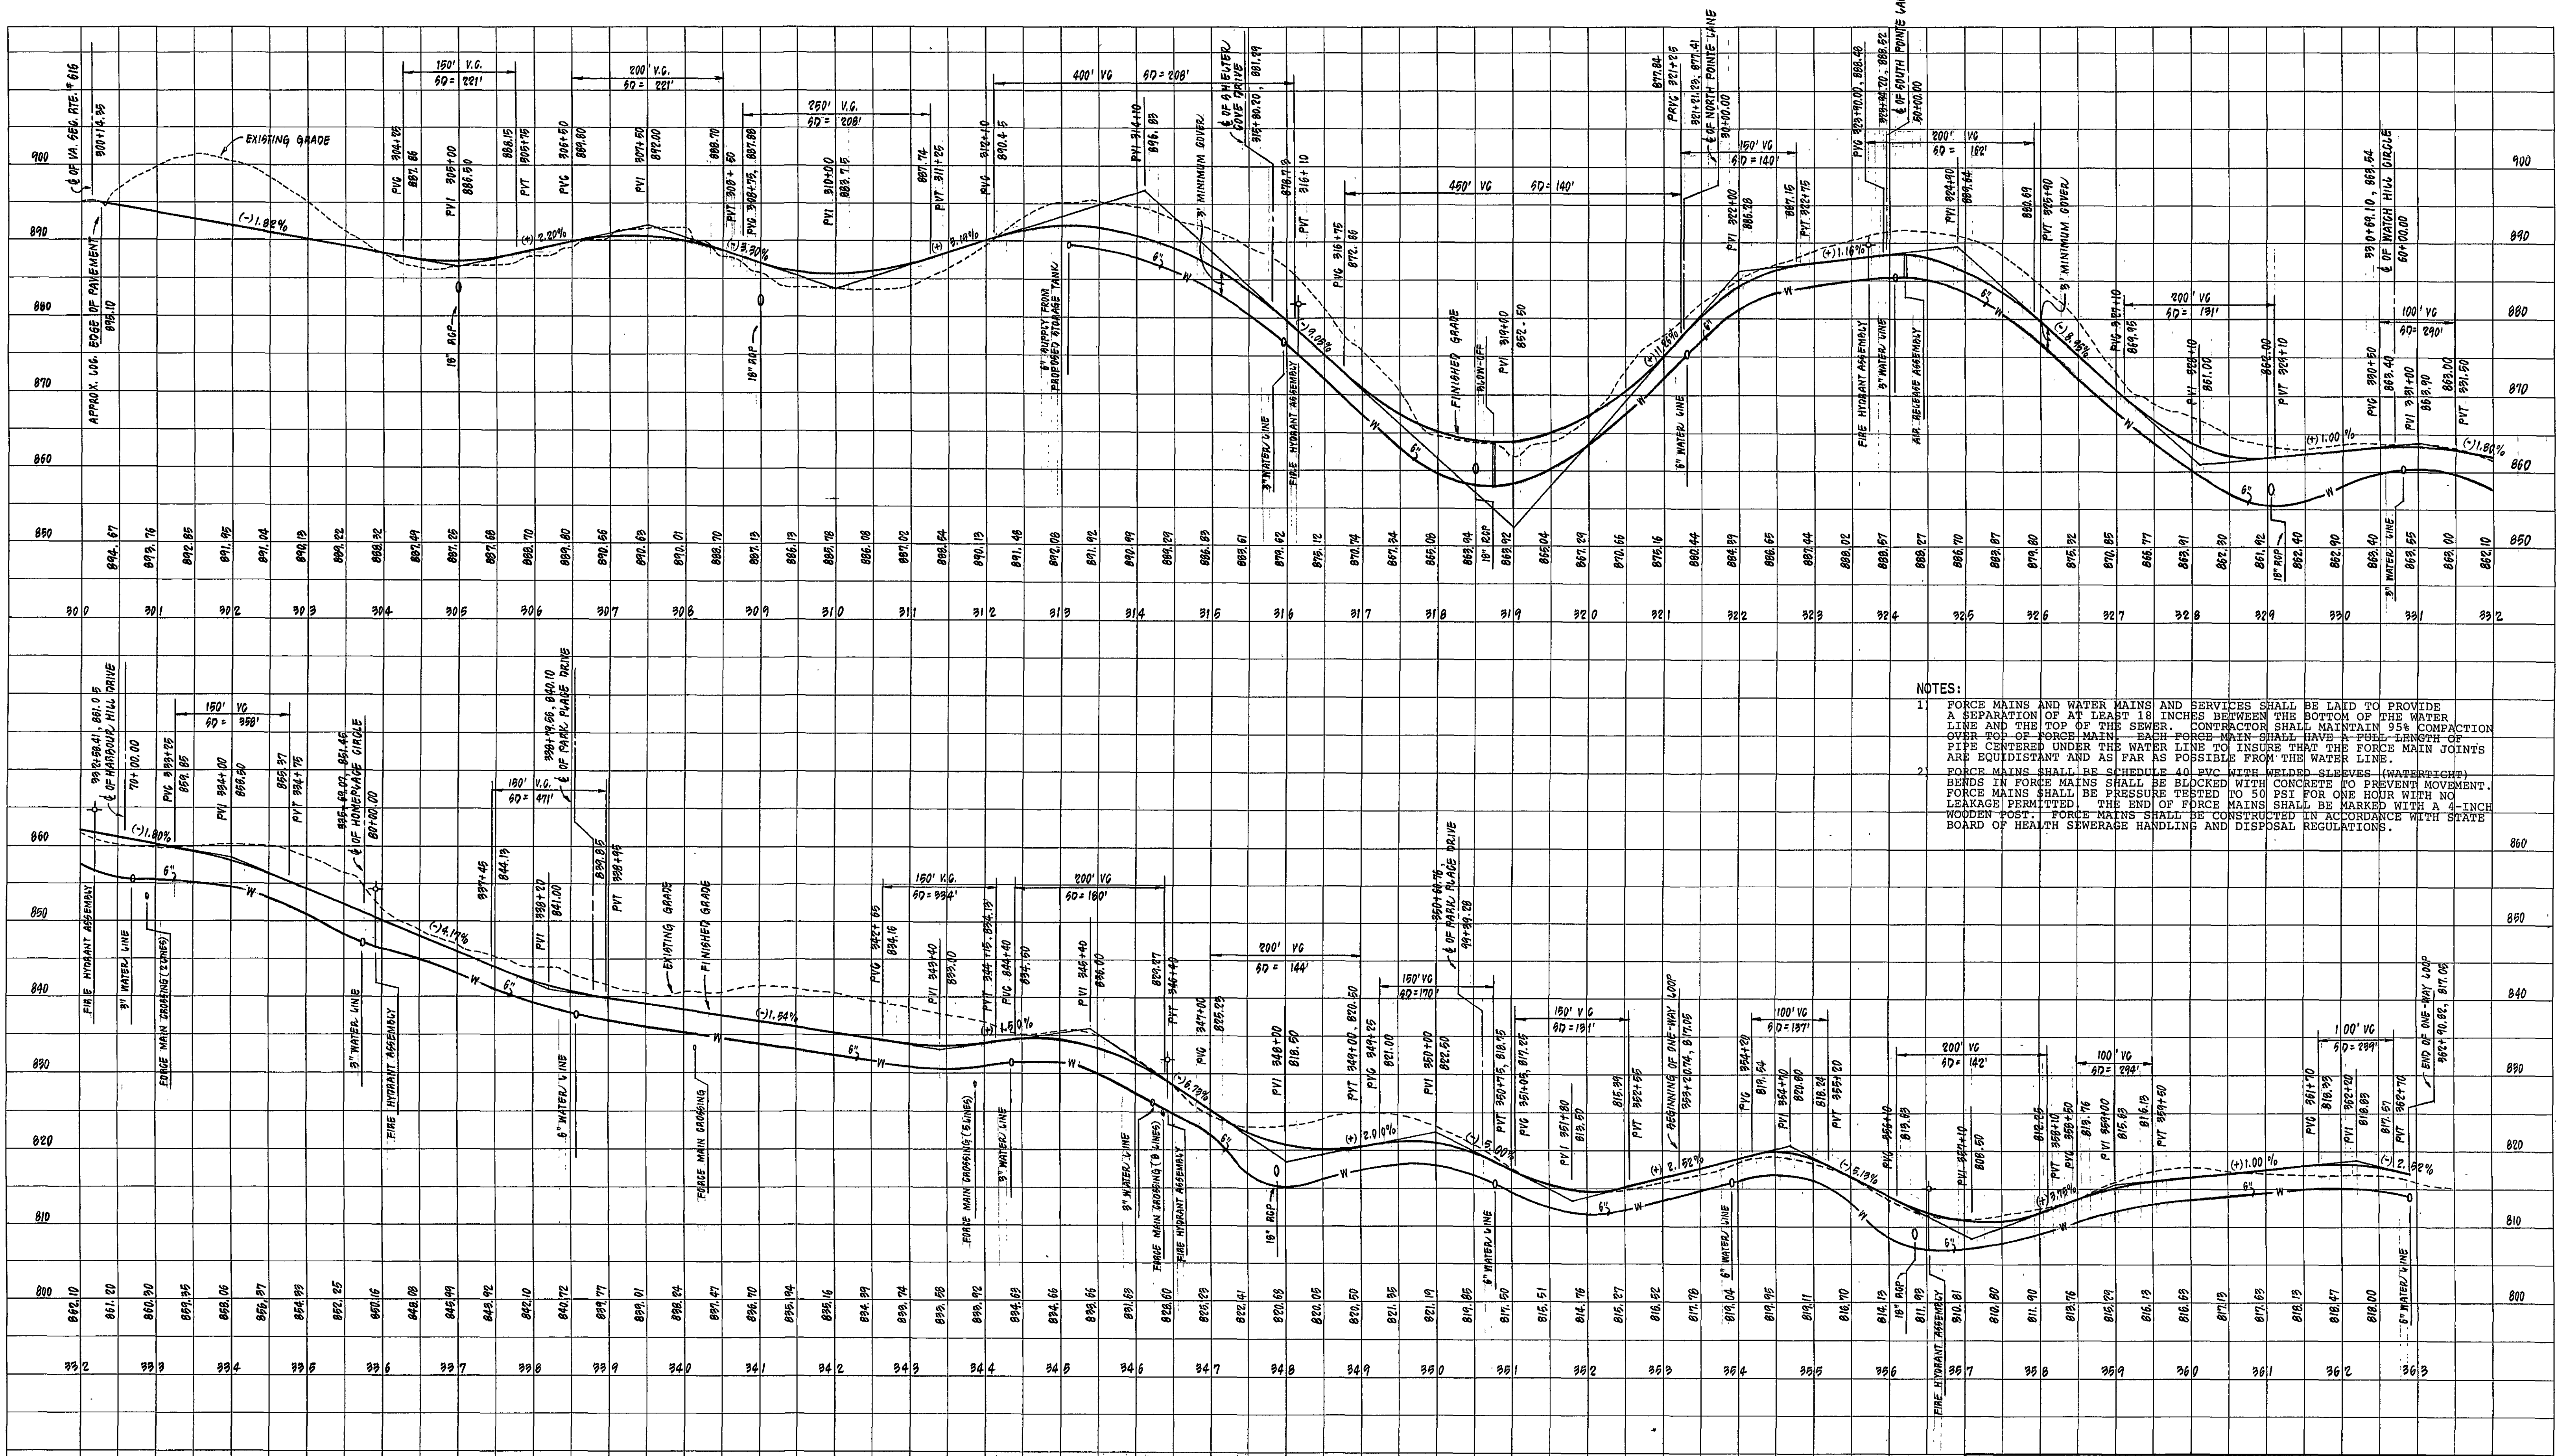

- NOTES:
1. FORCE MAINS AND WATER MAINS AND SERVICES SHALL BE LAID TO PROVIDE A SEPARATION OF AT LEAST 18 INCHES BETWEEN THE BOTTOM OF THE WATER LINE AND THE TOP OF THE SEWER. CONTRACTOR SHALL MAINTAIN 95% COMPACTION OVER TOP OF FORCE MAIN. EACH FORCE MAIN SHALL HAVE A FULL LENGTH OF PIPE COVERED UNDER THE WATER LINE TO INSURE THAT THE FORCE MAIN JOINTS ARE EQUIDISTANT AND AS FAR AS POSSIBLE FROM THE WATER LINES.
 2. FORCE MAINS SHALL BE SCHEDULE 40 PVC WITH WELDED SLEEVES (WATER TIGHT). BENDS IN FORCE MAINS SHALL BE BLOCKED WITH CONCRETE TO PREVENT MOVEMENT. FORCE MAINS SHALL BE PRESSURE TESTED TO 50 PSI FOR ONE HOUR WITH NO LEAKAGE PERMITTED. THE END OF FORCE MAINS SHALL BE MARKED WITH A 4 INCH WOODEN POST. FORCE MAINS SHALL BE CONSTRUCTED IN ACCORDANCE WITH STATE BOARD OF HEALTH SEWERAGE HANDLING AND DISPOSAL REGULATIONS.

BOARDWALK DRIVE

REVISION		DATE	DESCRIPTION
DESIGNED		LWH	WATER SYSTEM PROFILES FOR "BOARDWALK" PREPARED FOR WILLARD CONSTRUCTION OF ROANOKE VALLEY, INC. GILLS CREEK MAGISTERIAL DISTRICT FRANKLIN COUNTY, VIRGINIA
DRAWN		RAC	
CHECKED		MSW	
SCALE: 1"=100' HORIZ. 1"=10' VERT.			COMM: *89-204
DATE: 2 JUNE 1996			SHEET 5 of 7

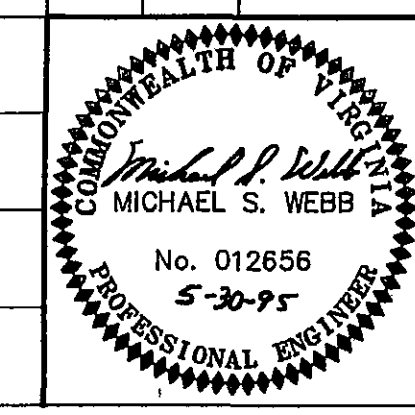

LUMSDEN ASSOCIATES, P.C.
ENGINEERS-SURVEYORS-PLANNERS
ROANOKE, VIRGINIA