



PAVEMENT NOTES:

1. THE SIZE 21B AGGREGATE SHALL BE PRIMED WITH APPROXIMATELY 0.35 GAL/SY OF RC-250 ASPHALT AND COVERED WITH 18 TO 18 LBS/SY OF SIZE 8-P AGGREGATE BEFORE PLACING SM-9.5A FOR STANDARD PAVEMENT ONLY.

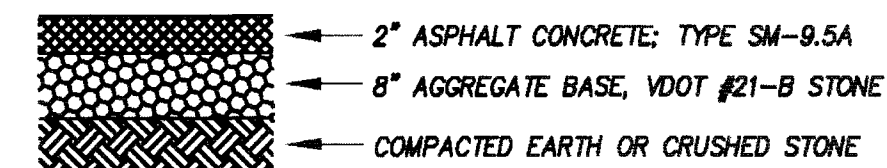


STANDARD PAVEMENT DETAIL

NO SCALE

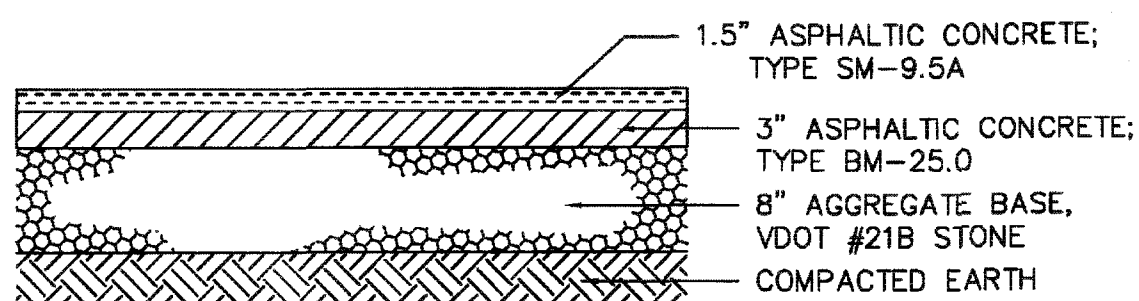

HEAVY DUTY PAVEMENT DETAIL*


NO SCALE

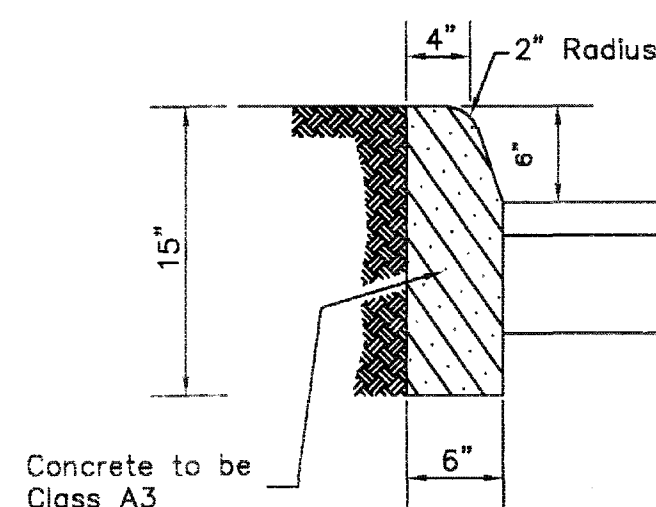

CONCRETE CURB (CG-2)


NO SCALE

SEE VDOT ROAD & BRIDGE STANDARDS FOR ADDITIONAL CURB AND GUTTER NOTES AND DETAILS.

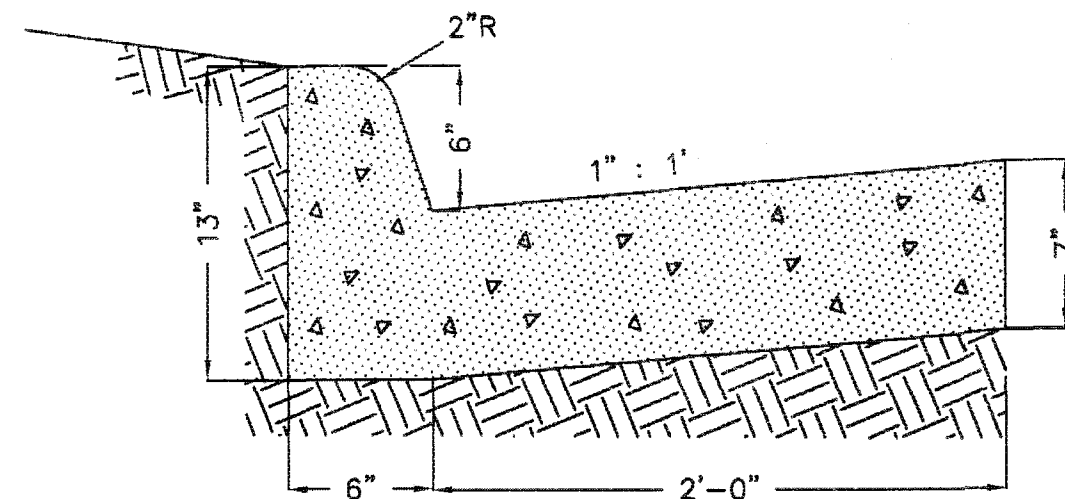

CONCRETE CURB (CG-6)

NO SCALE

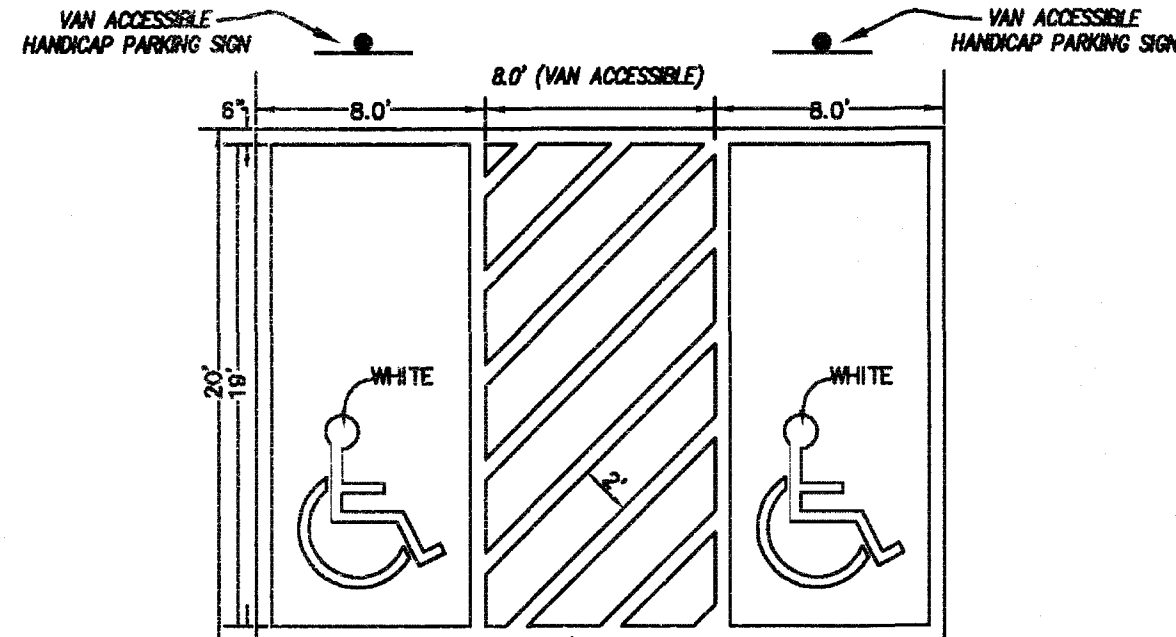


HANDICAP PARKING (VAN)

NO SCALE


NOTES:

1. CONTRACTION JOINTS AT 8' O.C., SCORE TO 25% OF SIDEWALK THICKNESS
2. EXPANSION JOINTS MAX. 30' APART, TRIM JOINT FILLER AND APPLY SEALANT.
3. CURB & SIDEWALK MAY BE POURED MONOLITHICALLY.

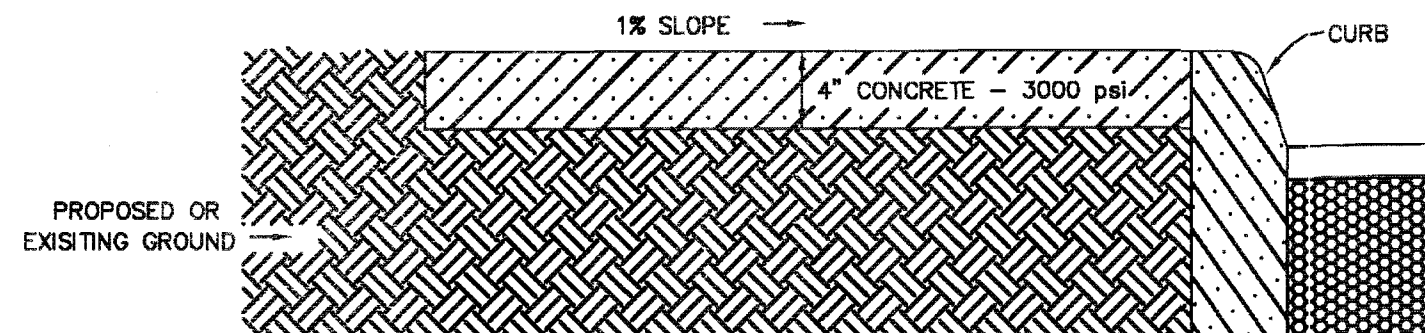


SIDEWALK DETAIL

NO SCALE

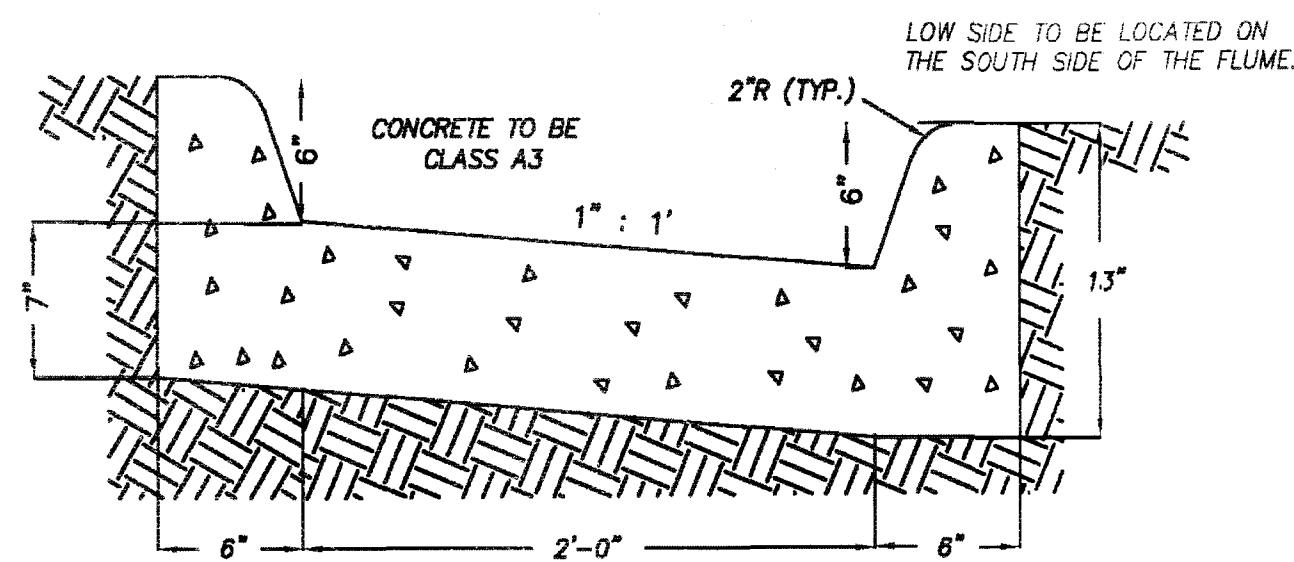

2" CONC. CURB CUT


NO SCALE

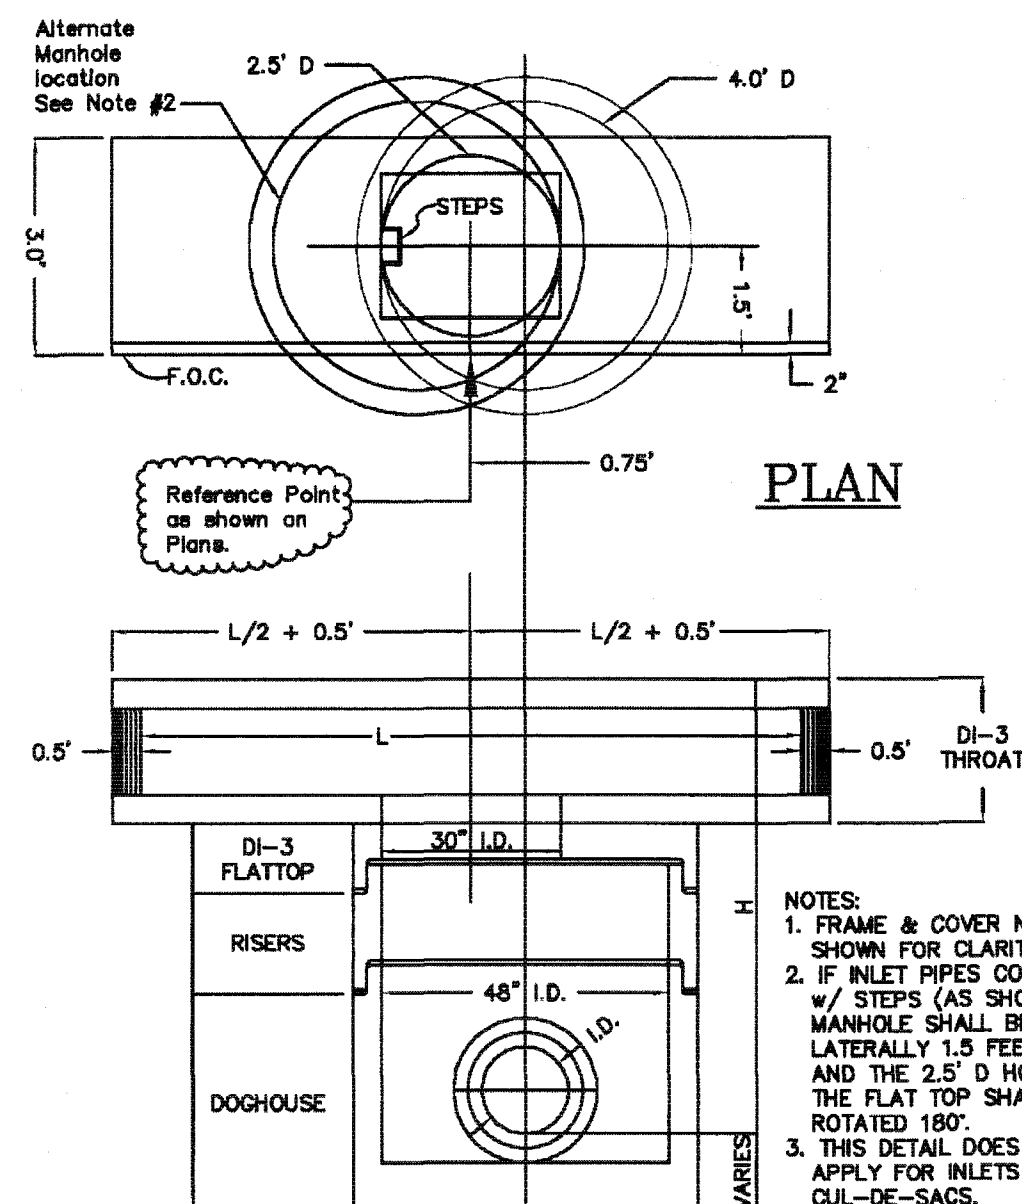

PROFILE

LOCATION DETAIL FOR DI-3A + 3C (PRECAST)

NO SCALE

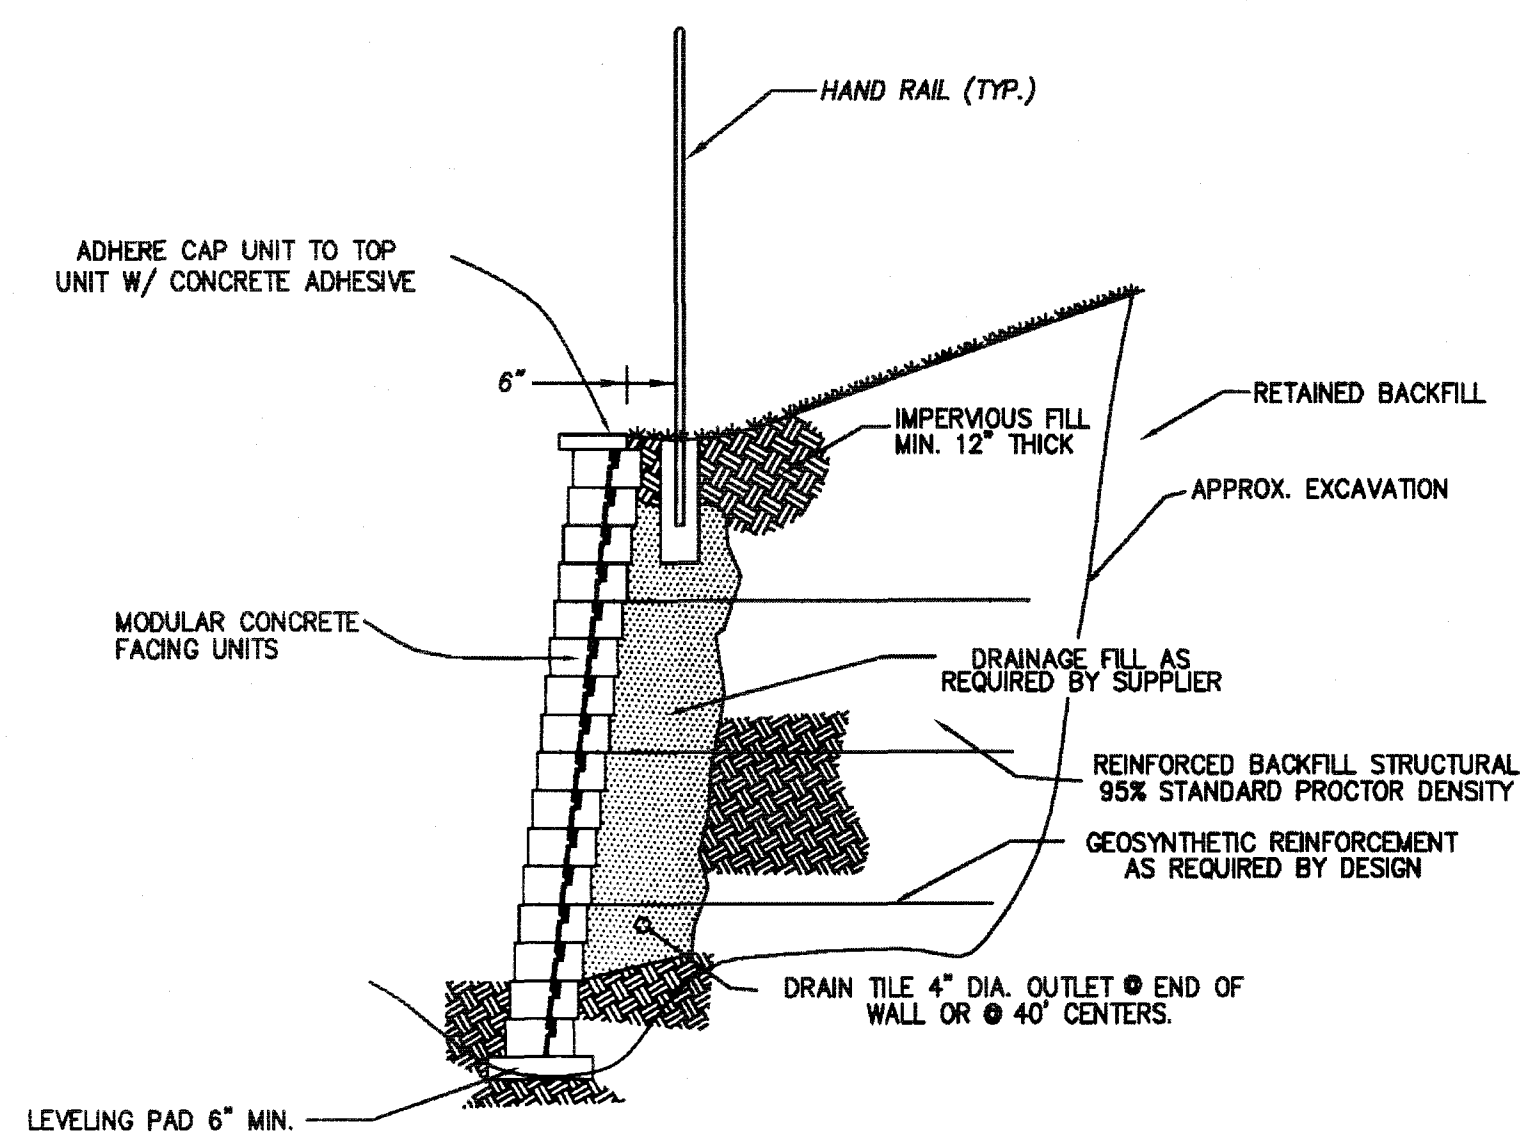


NOTE:

WALL DESIGNER SHALL PROVIDE TO THE OWNER DESIGN DRAWINGS FOR THE RETAINING WALLS. SUCH DRAWINGS TO INCLUDE TYPE AND STYLE. DRAWINGS SHALL BE SIGNED AND SEALED BY A REGISTERED PROFESSIONAL ENGINEER IN THE STATE OF VIRGINIA. WALL DETAILS AND PROFILES SHOWN IN THESE PLANS ARE FOR SCHEMATIC DETAIL ONLY.


RETAINING WALL WITH HAND RAIL

NO SCALE



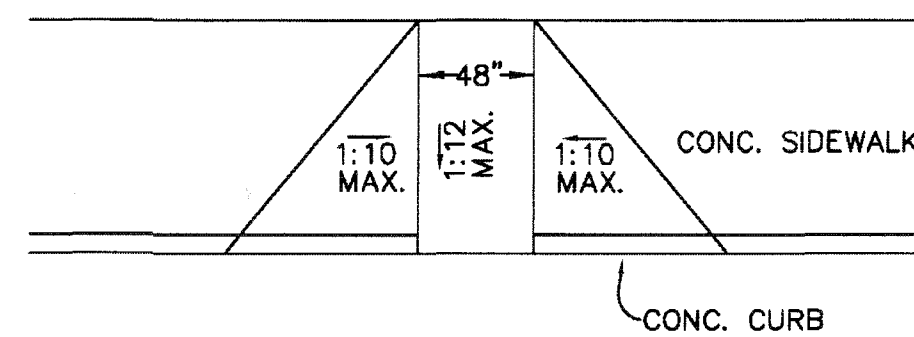


HANDICAP RAMP DETAIL

NO SCALE

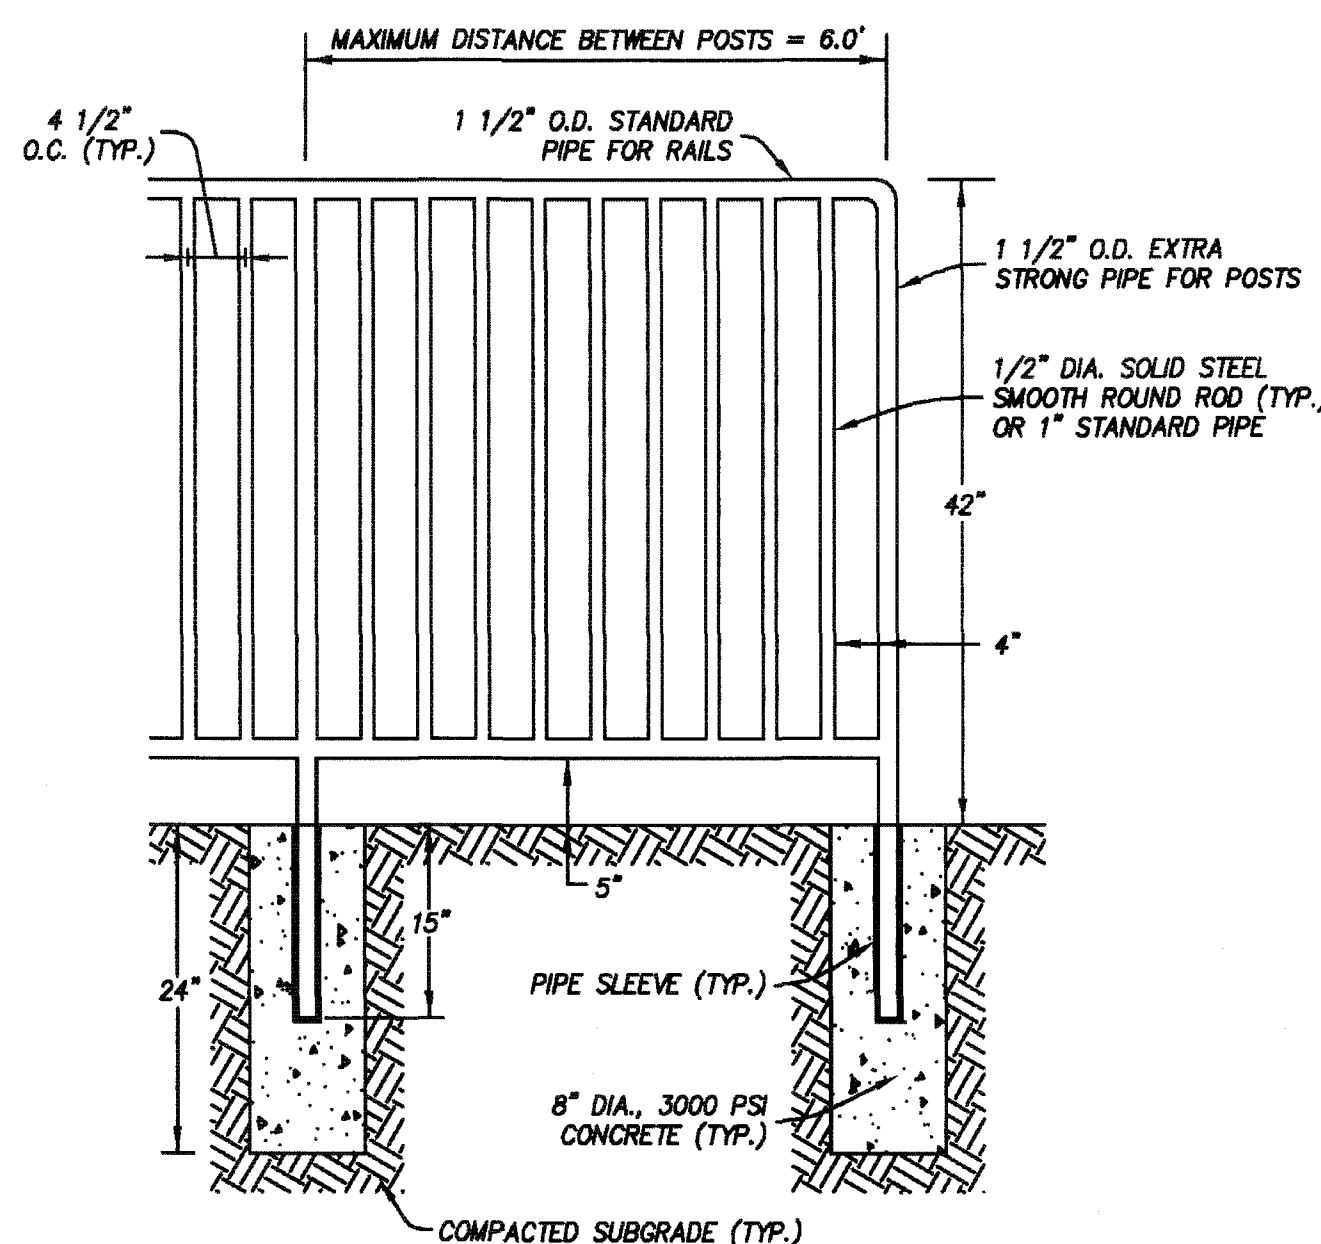

NOTE: HAND RAIL SHALL BE PRIMED AND RECEIVE TWO COATS OF ENAMEL PAINT (COLOR: GRAY).

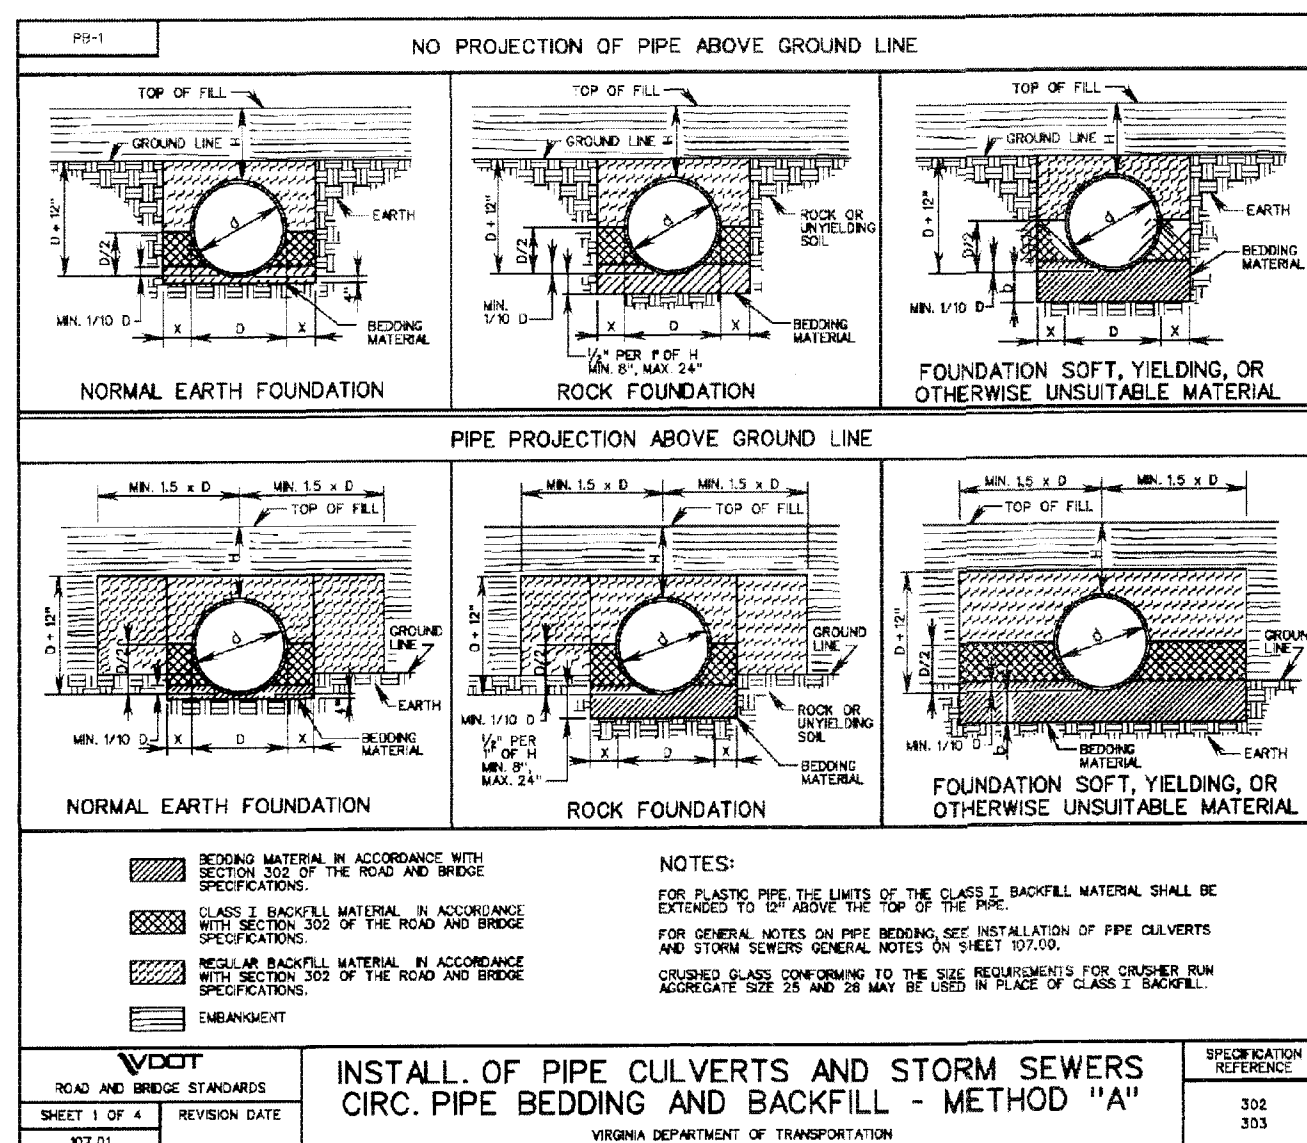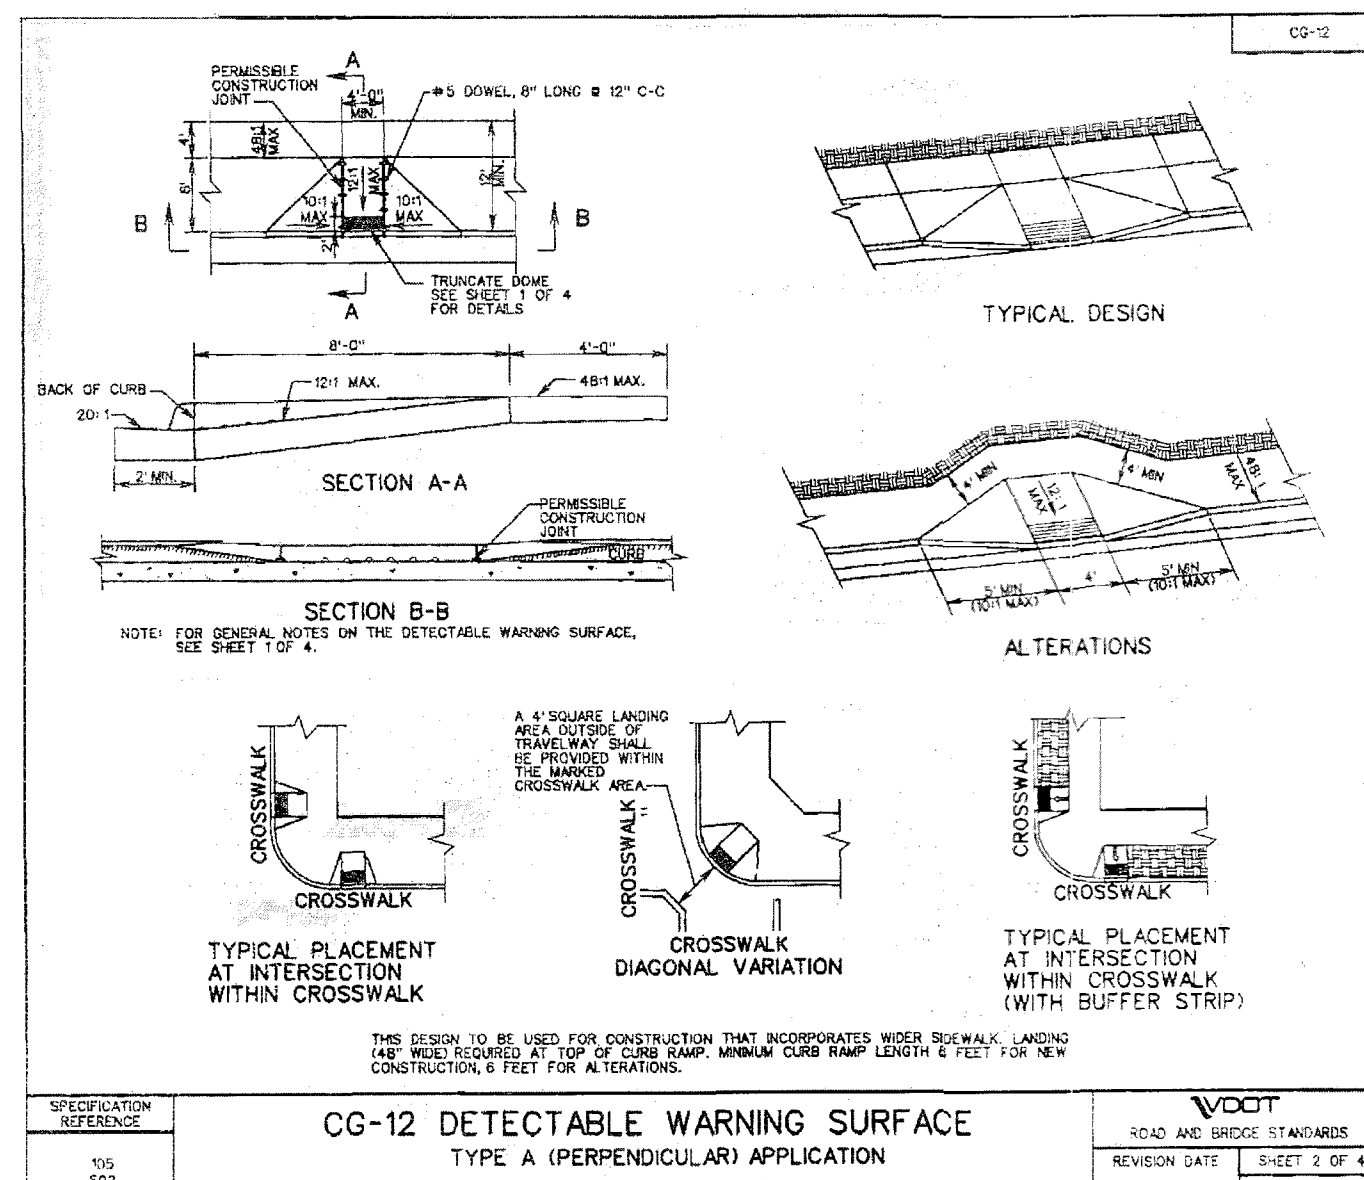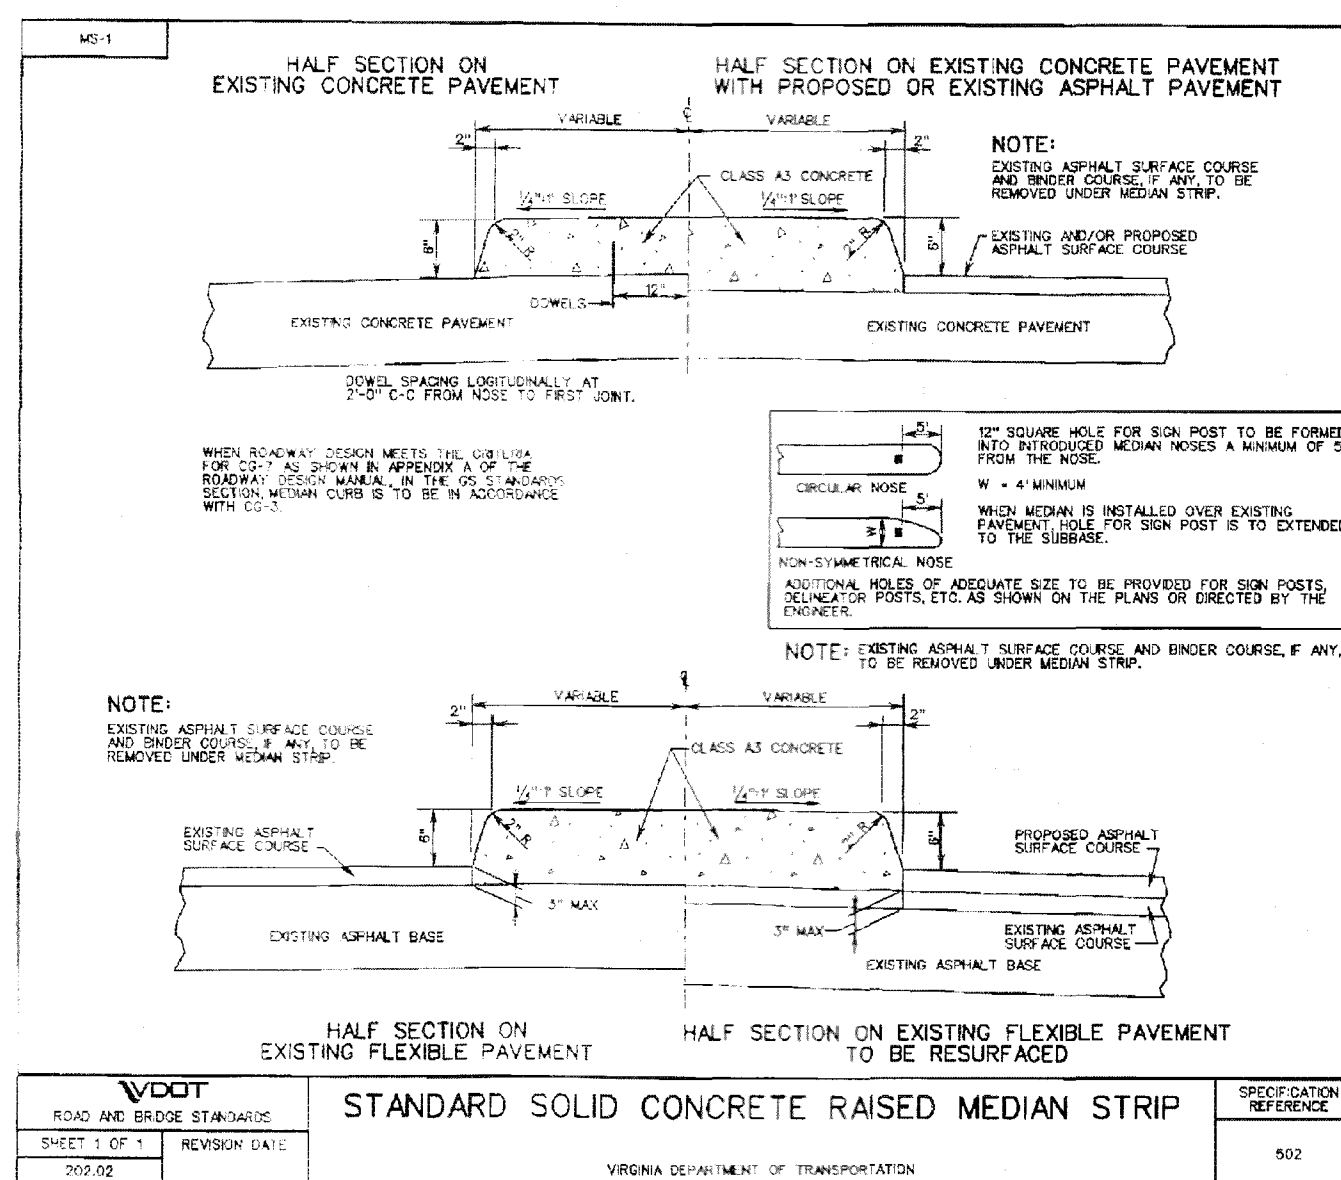INSTALL. OF PIPE CULVERTS AND STORM SEWERS
CIRC. PIPE BEDDING AND BACKFILL - METHOD "A"CG-12 DETECTABLE WARNING SURFACE
TYPE A (PERPENDICULAR) APPLICATION

STANDARD SOLID CONCRETE RAISED MEDIAN STRIP

NOTES & DETAILS

NO.	DATE	REVISIONS	DESCRIPTION
1			
2			
3			
4			
5			

DATE: October 6, 2014
SCALE: AS SHOWN
COMMISSION NO: 13-215
SHEET 4 OF 13