


PLAN	DATE
SUBMITTED	2-2-57
NOTED	
PLANNED	
CHECKED	
BY	
NO. 78-57	

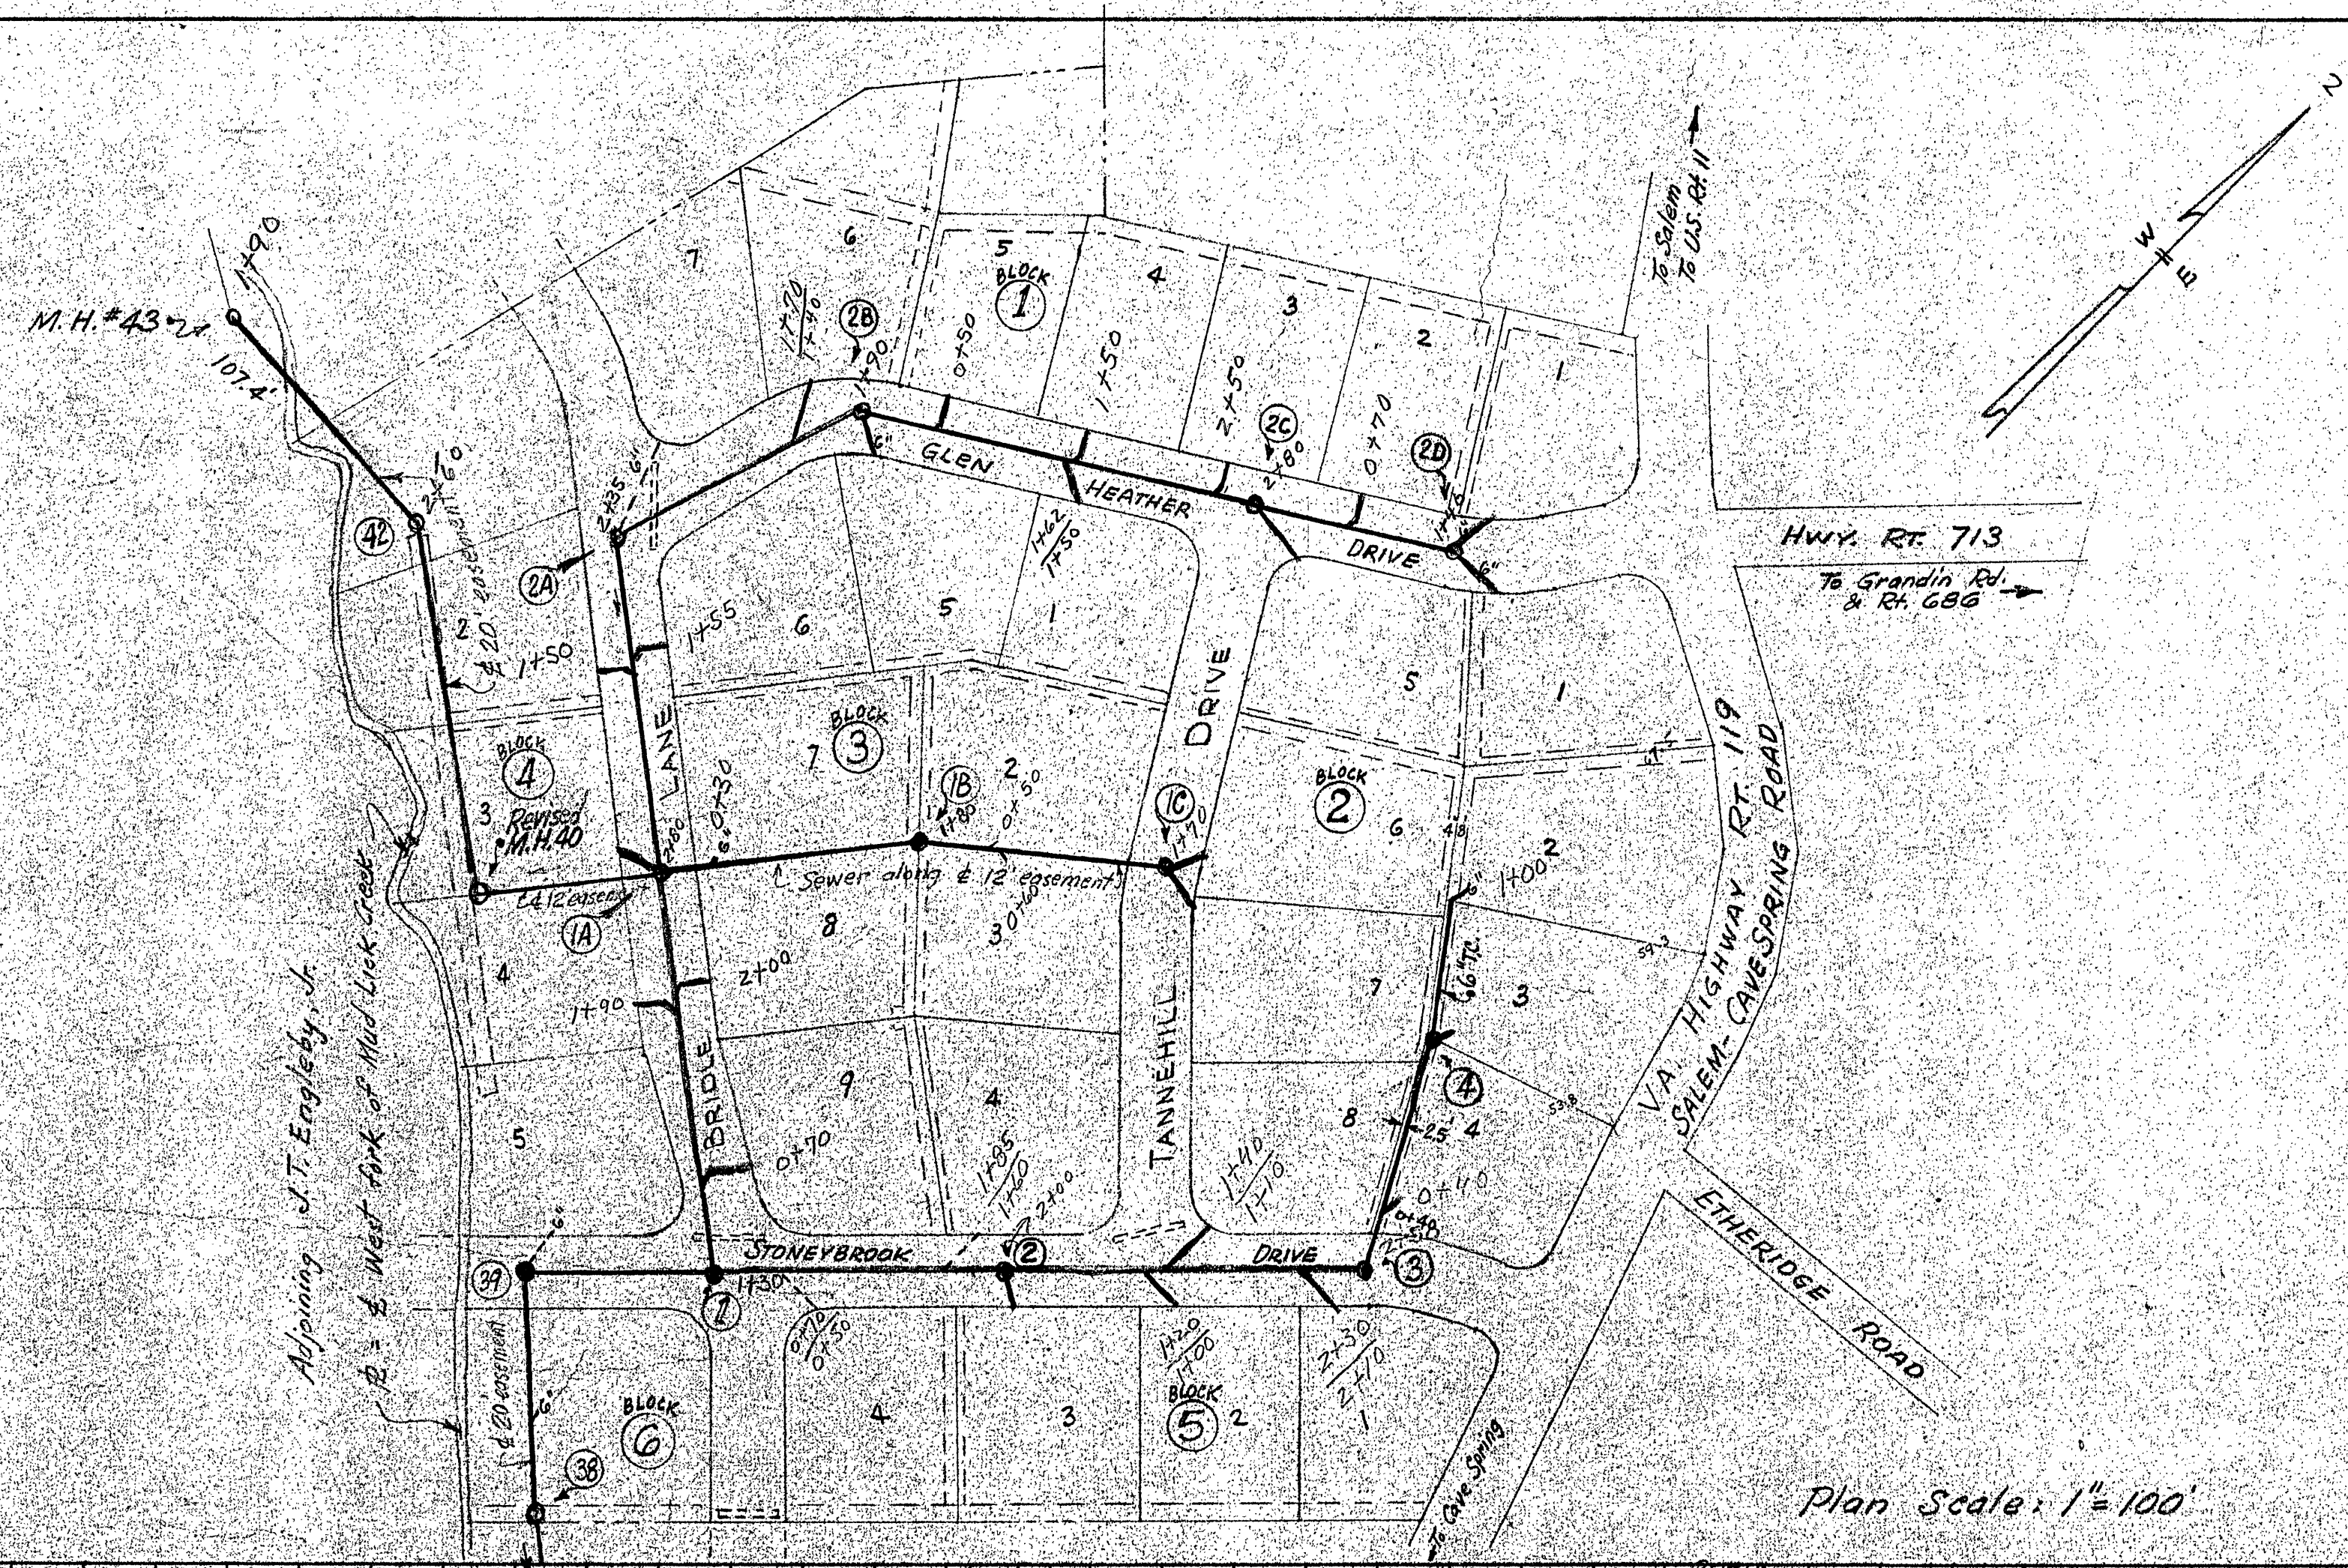

Plan Scale: 1"=100'

Note: Sewer mains, manholes & laterals to be constructed in accordance with specifications and standards of Engineering Department of City of Roanoke, Va.
 6" T.C. Sewer laterals to be installed on slope of 1/4" per ft.
 Man hole lids to contain the words "Roanoke / Sewer / County"
 Infiltration not to exceed 1 gal per lin ft of 8" main per 24 hours for sewer system.
 "Extra Strength" terra cotta or vitrified pipe shall be installed where depth of cover exceeds 10 ft. height.

APPROVED:

James A. Beavers
 Owner
 Exec. Director, Roanoke County Sanitation Authority
 Date: 8/29/57

Paul J. Matthews
 Secretary of Roanoke County Planning Comm.
 Date: 9-10-57


John C. Boyles
 Chairman of Board of Supervisors of Roanoke Co., Va.
 Date: 9-13-57

J. R. Williams
 City Engineer of Roanoke, Va.
 Date: 11-13-57

J. R. Williams
 Agent, Roanoke City Planning Comm.
 Date: Nov. 13, 1957

PROFILE	DATE
SUBMITTED	2-2-57
NOTED	
PLANNED	
CHECKED	
BY	
NO. 78-57	

Note: 8" T.C. Sewer main shown herein between M.H. 38-39-1-1A- Revised 20-22 constitutes a revision of the part of "Mud Lick Sewer Extension" across the H.L. Mair property and when approved, renders null & void that portion of "Mud Lick Sewer Extension" between M.H. 38 & M.H. 42 as shown on plans & profile Sheet 5 of 6, said plans prepared by C.B. Malcolm & Son, Engrs., dated May 13, 1957.

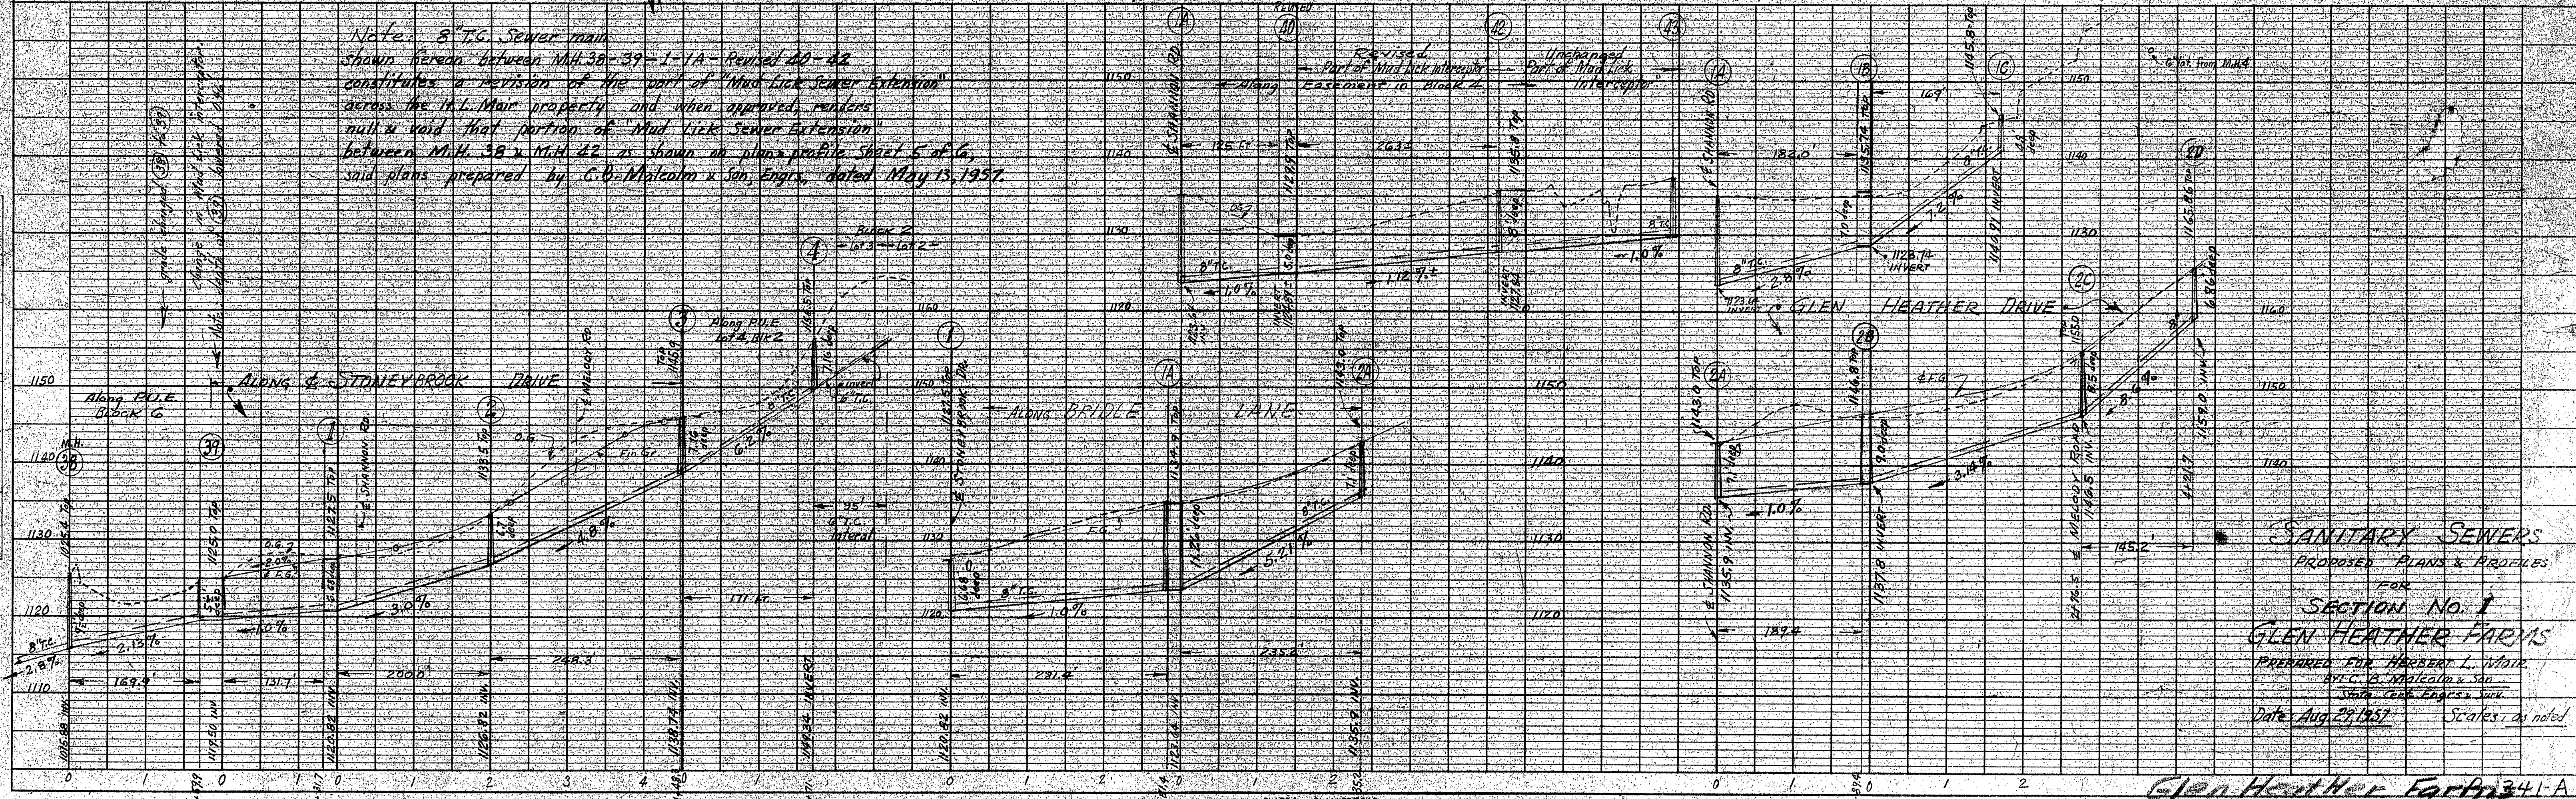

SANITARY SEWERS
 PROPOSED PLANS & PROFILES
 FOR
 SECTION NO. 1
 GLEN HEATHER FARMS
 PREPARED FOR HERBERT L. MOIR
 BY C.B. MALCOLM & SON
 State Civil Engineers Inc.
 Date Aug. 22, 1957
 Scales: as noted

Glen Heather Farms 34-1-A