




202 - KROGER FUEL CENTER

BTC	BTCC	CPB	05/21/2020	1"-20"
DRAWN BY	DESIGNED BY	CHECKED BY	DATE	SCALE
				REVISIONS
				9/2/2020

PROJECT NO. 04200047-00
C2

APPROVED, 7/7/2020

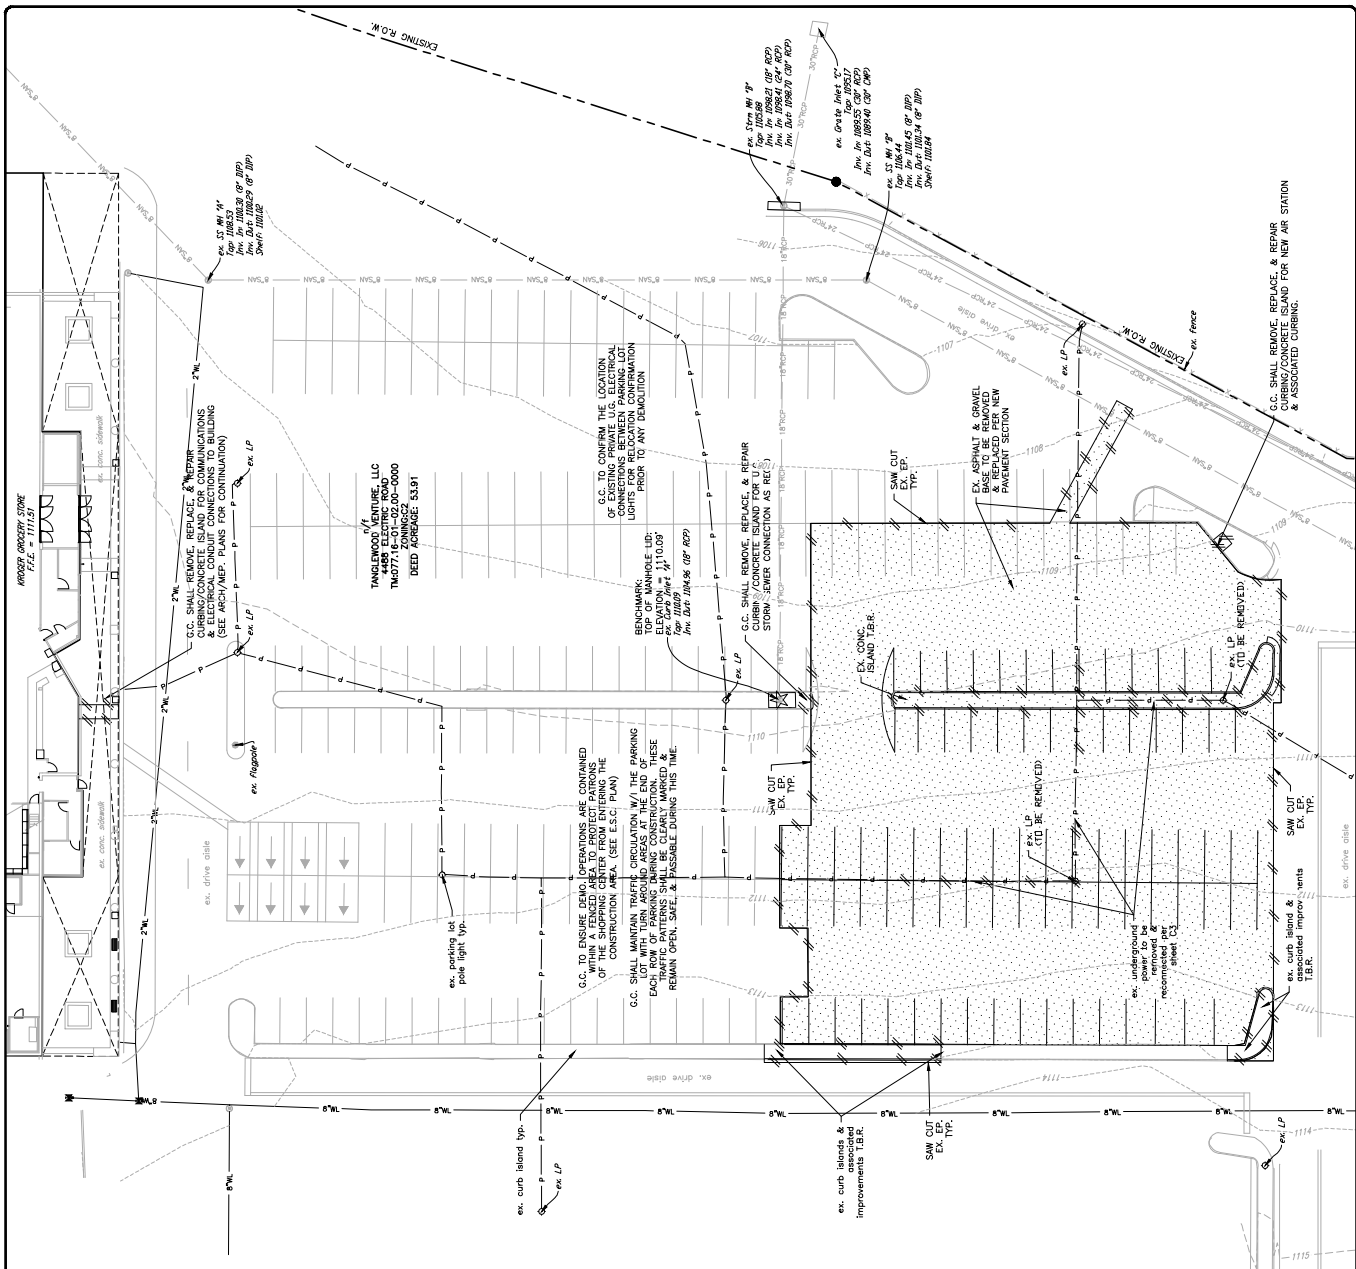

DEMOLITION NOTES

- DEMOLITION SHALL INCLUDE, UNLESS OTHERWISE NOTED ON DRAWINGS, REMOVAL OF EXISTING OBJECTS OR IMPROVEMENTS, WHETHER INDICATED ON THE DRAWINGS OR NOT, THAT WOULD IN THE OPINION OF THE OWNER, BE NECESSARY TO PERFORM THE PROJECT OR OBTAIN NECESSARY PERMITS AND LICENSES.
- PERMITS, FEES, AND LICENSES SHALL BE SECURED AND PAID FOR BY THE CONTRACTOR, INCLUDING DISPOSAL CHARGES AS REQUIRED.
- WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE GOVERNING AUTHORITIES IN DEMOLITION OF EXISTING PAVEMENT, CURBS AND GUTTERS, DRAINAGE STRUCTURES AND UTILITIES AS MAY BE REQUIRED.
- CONTRACTOR SHALL SAW-CUT ALL JOINTS WHERE EXISTING CURBING, PAVEMENT AND SIDEWALK IS TO BE DEMOLISHED AND NEW CONSTRUCTION JOINS THE EXISTING. CONTRACTOR SHALL COMPLETELY FILL BELOW GRADE BASEMENTS, MELLETS, ETC) USING APPROVED SELECT FILL MATERIAL. (UNDERGROUND FUEL STORAGE TANK, BASEMENTS, MELLETS, ETC)
- ALL EXISTING CURBING, CONCRETE SIDEWALK ENTRANCES, BUILDING FOUNDATIONS AND TREES AND BRUSH THAT ARE DEMOLISHED SHALL BE REMOVED FROM THE SITE AND DISPOSED OF BY THE CONTRACTOR, BURNING DEBRIS, ETC. SHALL NOT BE USED AS FILL MATERIAL ON THE SITE.
- CONTRACTOR SHALL PROVIDE THE FOLLOWING PROTECTIONS SITE:
MAKE ARRANGEMENTS BEFORE INITIATING DEMOLITION, FOR RELOCATING, DISCONNECTING, REROUTING, AND/OR ABANDONING EXISTING UTILITIES.
PIPING, TO PERMIT WORK TO PROCEED WITHOUT DELAY. ARRANGEMENTS SHALL BE MADE IN ACCORDANCE WITH REGULATIONS OF AUTHORITIES OF UTILITIES MENTIONED. SUCH AS OVERHEAD AND UNDERGROUND POWER LINES, GAS MAINS, WATER MAINS, SEWER MAINS, ETC).
CONTRACTOR SHALL NOT USE WATER WHEN IT MAY CREATE HAZARDOUS OR OBSTACLES TO TRAFFIC, SUCH AS ICE, FLOODING AND/ OR POLLUTION.
- ENFORCE PASSAGE OF PERSONS AROUND ALL AREAS OF DEMOLITION.
- CONDUCT OPERATIONS TO PREVENT DAMAGE TO ADJACENT BUILDINGS, STRUCTURES, OTHER FACILITIES, OR INJURY TO PERSONS.
- PROMPTLY REPAIR DAMAGES CAUSED TO ADJACENT FACILITIES BY DEMOLITION OPERATIONS AT NO ADDITIONAL COST TO THE OWNER.
- MAINTAIN EXISTING UTILITIES INDICATED TO REMAIN, KEEP IN SERVICE, AND PROTECT AGAINST DAMAGE DURING DEMOLITION. CONTRACTOR SHALL NOTIFY ALL UTILITIES CONCERNED IN WRITING BY AUTHORITIES HAVING JURISDICTION. PROVIDE TEMPORARY SERVICES DURING INTERRUPTIONS TO EXISTING UTILITIES AS ACCEPTABLE TO GOVERNING AUTHORITIES.
- USE WATER SPRINKLING AND OTHER SUITABLE METHODS TO LIMIT DUST AND DIRT RISING AND SCATTERING IN AIR TO LOWEST PRACTICAL LEVEL.
- COMPLY WITH GOVERNING REGULATIONS PERTAINING TO ENVIRONMENTAL PROTECTION.
- G.C. TO VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES PRIOR TO CONSTRUCTION & NOTIFY THE ENGINEER OF ANY CONFLICTS PRESENT.
- G.C. SHALL COORDINATE W/ PROCTOR PRIOR TO CONSTRUCTION

LEGEND:

- EX. PAVEMENT TO BE SAWCUT
- EX. PAVEMENT TO BE REMOVED
- EX. FEATURE TO BE REMOVED