

1. ALL DEMOITION SHALL OCCUR DURING NORMAL WORK DAYS WHERE THE DEMOLITION IS SEPARATED FROM ACTIVE SPACES. NO CONCRETE SAWING OR JJACKHAMERING MAY OCCUR DURING BUSINESS HOURS.
2. SAWCUT AND REMOVAL OF EXISTING CONCRETE SLAB FOR PLUMBING SHALL OCCUR AFTER HOURS OR ON WEEKENDS
3. CONTRACTOR SHALL DISPOSE OF REMOVED MATERIALS LEGALLY OFF SITE.
4. THE OWNER HAS SECURED AND DETERMINED THE WORK AREA IS FREE OF ASBESTOS.
5. COORDINATE WITH OWNER THE DEMOLITION OF WORK AND INSTALLATION OF TEMPOROARY DUST SCREENS.
6. CAUTION SHALL BE TAKEN ON COMPONETS TO BE RELOCATED OR REUSED ( I.E DOORS/ FRAMES AS SCHEDULED AND GLASS PANEL ABOVE OFFICE WALLS IN OFFICE 02,03,04 ) FROM DEMO WALLS.
7. ALL CARPET SHALL BE REMOVED IN THE PROJECT AREA.
8. ALL ELECTRICAL SHALL BE REMOVED INCLUDING LIGHTING ETC NOT SCHEDULED TO BE REUSED.
9. ALL CABINETRY AND PERMANTELY ATTACHED FIXTURES SHALL BE REMOVED.

## DEMOLITION FLOOR PLAN

SCALE: 1/8" = 1'-0"



13,499 SF +/- TOTAL, 4200 +/- SF WORK AREA

GROUND LEVEL ENTRY, LOWER LEVEL PLAN

RENOVATIONS  
FOR  
**COULTER OFFICE  
BUILDING**  
401 S. JEFFERSON ST  
ROANOKE, VA.

△	_____	_____
△	_____	_____
△	_____	_____
△	_____	_____
△	_____	_____

REVISIONS      DATE

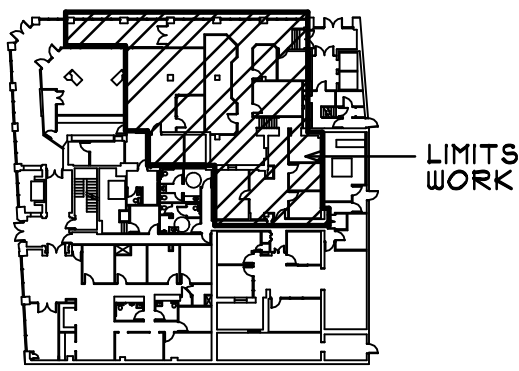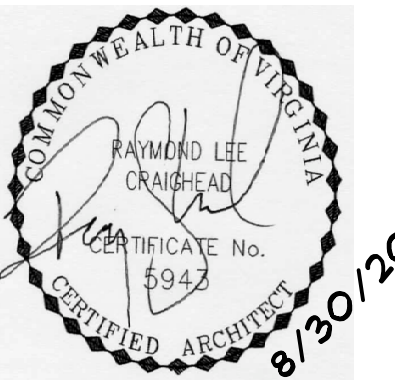

KEY PLAN

INTERIOR ALTERATIONS FOR  
**WESTERN VIRGINIA  
WATER AUTHORITY**

PROJECT NO: 2017043  
DATE: 04/15/2017  
DRAWN BY: RLC  
CHECKED BY: RLC

APPROVED FOR THE CONTRACTOR      DATE

APPROVED FOR THE OWNER      DATE

**A-1**  
DEMOLITION PLAN  
SCALE: 1/8" = 1'-0"

GRAPHIC: