



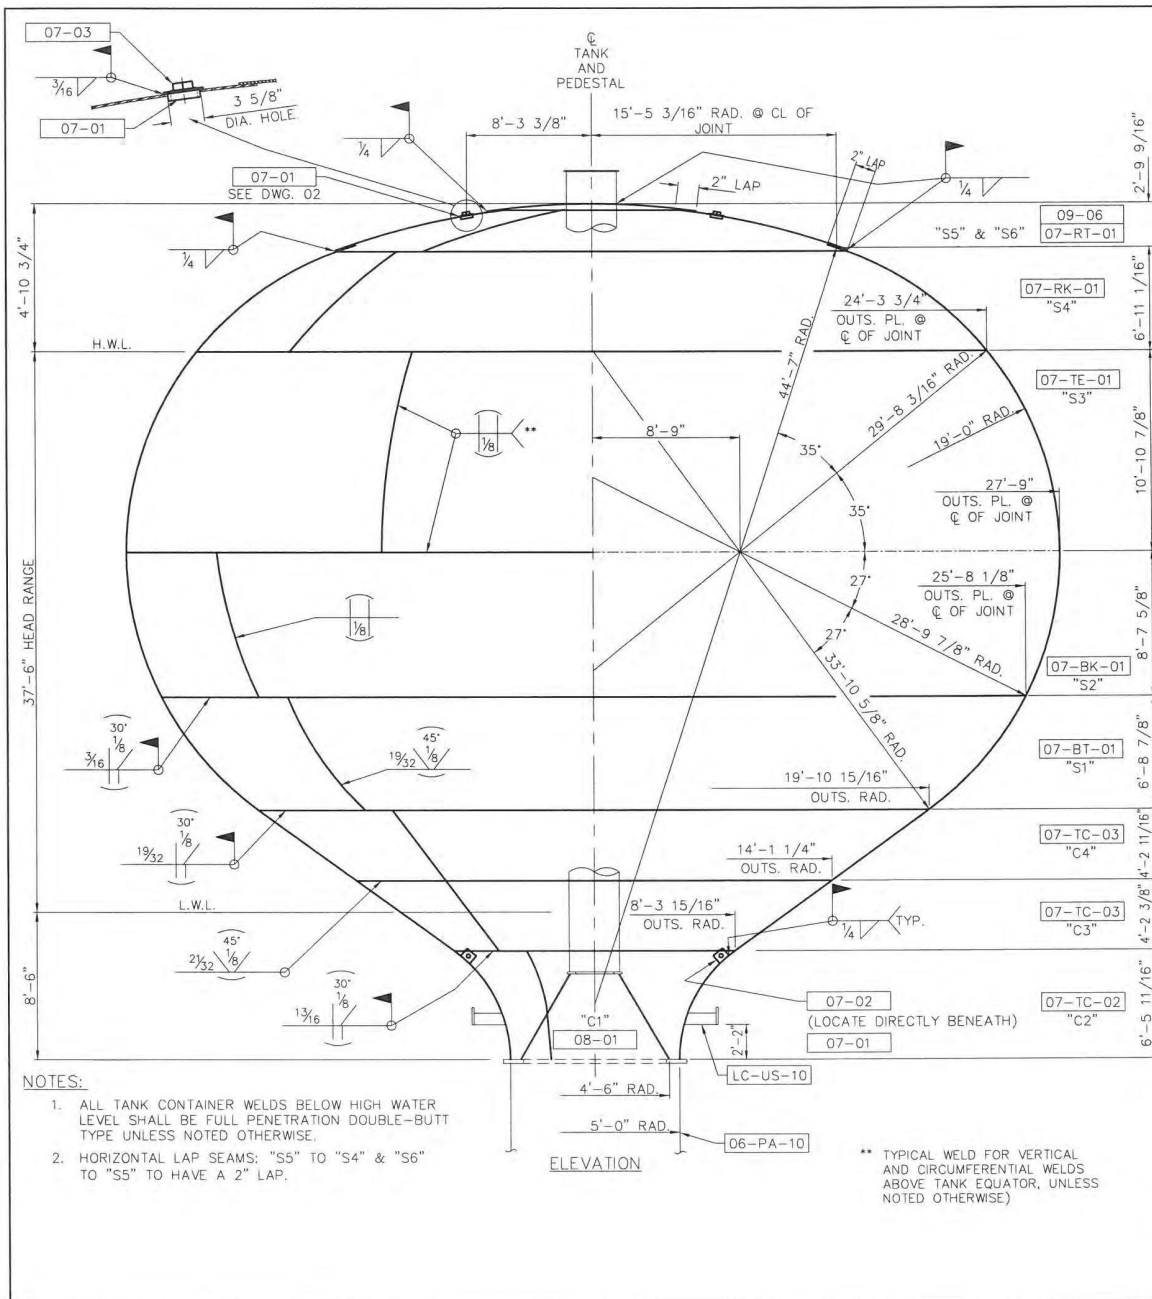

SHIPPING ITEM	QTY.	PC. MK.	QTY.	MATERIAL REQ'D	DESCRIPTION	UNIT WT.
07-TC-02	2			SMOOTH TRANSITION ASSEMBLY		6,655
		08-02	6	PL (2) 1 1/8" x 98" x 269"	"C2" CONE	
07-TC-03	12			PL CONE ASSEMBLY		3,630
		08-03	1	PL (4) 15/16" x 91" x 233"	"C3" CONE	
		08-04	1	PL (6) 25/32" x 93" x 235"	"C4" CONE	
07-BT-01	12			BOTTOM TAIL ASSEMBLY		2,535
		09-01	2	PL (6) 23/32" x 111" x 304"	"S1" BOT. TAIL	
07-BK-01	12			BOTTOM KNUCKLE ASSEMBLY		1,300
		09-02	2	PL (15) 5/16" x 72" x 222"	"S2" BOT. KNUCKLE	
07-TE-01	15			TOP EQUATOR ASSEMBLY		1,325
		09-03	2	PL (15) 1/4" x 72" x 284"	"S3" TOP EQUATOR	
07-RK-01	15			ROOF KNUCKLE ASSEMBLY		1,000
		09-04	2	PL (30) 1/4" x 65" x 143"	"S4" ROOF KNUCKLE	
07-RT-01	8			ROOF TAIL ASSEMBLY		755
		09-05	2	PL (8) 1/4" x 96" x 153"	"S5" ROOF TAIL	
	09-01	6		PL USE DROP FROM ABOVE	"S1" BOT. TAIL	1,270
	09-02	6		PL USE DROP FROM ABOVE	"S2" BOT. KNUCKLE	650
	09-06	2		PL (2) 1/4" x 96" x 191"	"S6" ROOF CAP	880
07-01	3			BY 2 1/2" DIA. SERIES 134 PHOENIX FLANGE	ROOF COUPLING	
07-02	3			PL 1/2" x 6" x 6"	BOTTOM LUG	
07-03	3			BY 2 1/2" DIA. SQ. HEAD (GALV.)	PIPE PLUG	

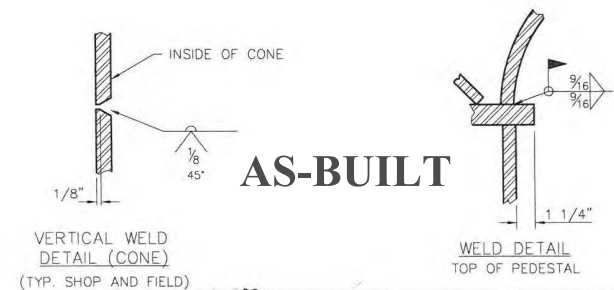

REV.		BY:	DATE	REMARKS
CALDWELL Since 1897 Water - Energy - Industrial FRANKLIN COUNTY, VIRGINIA 500,000 GALLON PEDESHERE				
BY: TSY		TITLE: TANK ELEVATION		
DATE: 12/13/19		DRAWING NO.: E-8884 07		