

211009-comp-09-encl.pdf
e:\bact\autocad\drawings\2021\2021-009\01-cad\01-engineering\02-design\211009-comp.dwg

EROSION CONTROL NARRATIVE

PROJECT DESCRIPTION

THIS PROJECT IS LOCATED WITHIN THE COMMERCIAL-GENERAL ZONING DISTRICT (CG) ON THE NORTH SIDE OF AIRPORT ROAD IN THE CITY OF ROANOKE. THE PROPOSED DEVELOPMENT CONSISTS OF A FLUNERAL HOME, PARKING AREA, AND ASSOCIATED SITE GRADING & IMPROVEMENTS. APPROXIMATELY 1.50 ACRES WILL BE DISTURBED WITH THIS PROJECT.

EXISTING SITE CONDITIONS

THIS SITE IS CURRENTLY A CLEARED VACANT LOT. THE CURRENT SITE TOPOGRAPHY GENERALLY DRAINS RUNOFF FROM NORTHEAST TO SOUTHWEST. THE DRAINAGE SHED CONVEYS RUNOFF TO A CURB INLET AND GRATE INLET IN THE RIGHT-OF-WAY ALONG AIRPORT ROAD.

ADJACENT AREAS

THIS SITE IS BORDERED BY BLUE RIDGE MEMORIAL GARDENS CEMETERY TO THE NORTH AND EAST, LIGHT INDUSTRIAL AND COMMERCIAL PROPERTIES TO THE SOUTH, AND AIRPORT ROAD TO THE WEST.

OFFSITE AREAS

NO OFFSITE AREAS ARE COVERED WITH THIS PLAN. ANY OFFSITE AREAS REQUIRED FOR EARTHWORK OPERATIONS SHALL BE FROM A PERMITTED SITE AND THE CONTRACTOR SHALL NOTIFY THE CITY OF ROANOKE.

SOILS

SOILS INFORMATION IS BASED ON AN INSPECTION OF THE USDA WEB SOIL SURVEY AND HAS NOT BEEN FIELD VERIFIED. THE ONSITE SOILS ARE INDICATED TO BE AS FOLLOWS:

UDORTHEINTS-URBAN LAND COMPLEX, 0 TO 30% SLOPES (MAP UNIT 53)

UDORTHEINTS SOIL

HYDROLOGIC SOIL GROUP: N/A
DEPTH TO RESTRICTIVE FEATURE: MORE THAN 80 INCHES
DEPTH TO WATER TABLE: MORE THAN 80 INCHES
DRAINAGE CLASS: N/A
AVAILABLE WATER CAPACITY: N/A
SOIL PROFILE: N/A

CRITICAL AREAS

THE CONTRACTOR SHALL TAKE SPECIAL CARE TO INSURE THAT SEDIMENT IS NOT ALLOWED TO FLOW INTO THE EXISTING DOWNSTEAM STORM DRAIN. ENSURE THAT ALL ESC MEASURES ARE STABILIZED AND FUNCTIONING TO MINIMIZE THE POTENTIAL FOR ANY SEDIMENT LEAVING THE SITE.

MINIMUM STANDARDS

REFER TO DEQ MINIMUM STANDARDS.

EROSION AND SEDIMENT CONTROL MEASURES

CONSTRUCTION ENTRANCE (3.02) - A STONE CONSTRUCTION ENTRANCE WILL BE INSTALLED TO MINIMIZE THE AMOUNT OF MUD TRANSPORTED INTO EXISTING ROADS.

CONSTRUCTION ROAD STABILIZATION (3.03) - TO REDUCE THE EROSION AND SUBSEQUENT REGRADING OF PERMANENT DRIVE AREAS BETWEEN THE TIME OF INITIAL GRADING AND FINAL STABILIZATION, THESE ROADS WILL BE TEMPORARILY STABILIZED WITH STONE IMMEDIATELY AFTER GRADING.

SILT FENCE (3.05) - SILT FENCE WILL BE INSTALLED AT THE LOWER ENDS OF THE PROJECT SITE TO INTERCEPT SEDIMENT LAIDEN RUN-OFF PRIOR TO EXITING THE SITE.

TEMPORARY DIVERSION DIKE (3.09) - A TEMPORARY RIDGE OF COMPACTED SOIL WILL BE CONSTRUCTED TO DIVERT UPSLOPE RUNOFF AWAY FROM A DISTURBED AREA, AND/OR TO DIVERT SEDIMENT LAIDEN RUNOFF FROM A DISTURBED AREA TO A SEDIMENT TRAPPING MEASURE.

TEMPORARY SEEDING (3.31) - TEMPORARY SEEDING SHALL BE APPLIED TO TEMPORARY DIVERSION DIKES, TOPSOIL STOCKPILES, AND ALL AREAS TO BE ROUGH GRADED, BUT NOT FINISHED GRADED DURING THE INITIAL PHASE OF CONSTRUCTION. TEMPORARY SEEDING SHALL BE FAST GERMINATING, TEMPORARY VEGETATION AND INSTALLED IMMEDIATELY FOLLOWING GRADING, OR INSTALLATION IF A TEMPORARY MEASURE. SEE ALSO MINIMUM STANDARDS.

PERMANENT SEEDING (3.32) - PERMANENT SEEDING SHALL BE INSTALLED ON ALL DISTURBED AREAS OF THE SITE NOT OTHERWISE STABILIZED.

MULCHING (3.35) - ALL DISTURBED AREAS SHALL BE MULCHED AFTER SEEDING. STRAW MULCH SHALL BE APPLIED AT A RATE OF TWO TONS PER ACRE AND ANCHORED WITH 750 LBS PER ACRE OF FIBER MULCH OVER THE SEEDED AREA.

SOIL STABILIZATION & MATTING (3.36) - SLOPES 3:1 OR GREATER SHALL HAVE A PROTECTIVE COVERING OR MAT INSTALLED TO MINIMIZE EROSION AND AID IN ESTABLISHMENT OF PERMANENT VEGETATIVE STABILIZATION.

PERMANENT STABILIZATION

AREAS NOT COVERED BY DRIVEWAYS, WALKS OR OTHER PERMANENT HARD SURFACE SHALL BE STABILIZED WITH PERMANENT SEEDING. THE CONTRACTOR SHALL ENSURE THAT A STRONG STAND OF GRASS IS ESTABLISHED BEFORE THE REMOVAL OF EROSION CONTROL MEASURES.

MAINTENANCE:

ALL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE INSPECTED BI-WEEKLY AND AFTER EVERY RUNOFF PRODUCING RAINFALL. A LOG OF DATES AND INSPECTIONS SHALL BE KEPT. ANY DEFICIENCIES THAT ARE FOUND SHALL BE CORRECTED IMMEDIATELY. ACCUMULATED SEDIMENT AT TRAPPING MEASURES SHALL BE ROUTINELY REMOVED.

ALL DITCHES, SWALES, AND NATURAL WATERCOURSES DOWNSTREAM OF THIS PROJECT SHALL BE FIELD INSPECTED DURING AND AFTER CONSTRUCTION BY THE RLD TO ENSURE COMPLIANCE WITH DEQ'S MS-19. IF EROSION OR SCOUR IS OCCURRING, THE DEVELOPER SHALL BE RESPONSIBLE FOR ALL CORRECTIVE MEASURES.

EROSION AND SEDIMENT CONTROL MEASURES SHALL BE MAINTAINED UNTIL AFTER ALL DISTURBED AREAS HAVE BEEN PERMANENTLY STABILIZED AND THEN TEMPORARY MEASURES PROPERLY REMOVED.

STORMWATER MANAGEMENT CONSIDERATION:

THE INCREASE IN STORMWATER RUNOFF RESULTING FROM NEW IMPVIOUS SURFACES WILL BE CONTROLLED BY AN UNDERGROUND DETENTION FACILITY. THE PURCHASE OF OFFSITE NUTRIENT CREDITS WILL BE USED TO SATISFY THE WATER QUALITY REQUIREMENTS FOR THE SITE. REFER TO THE STORMWATER MANAGEMENT CALCULATIONS FOUND IN THE "PROJECT CALCULATIONS" WORKBOOK ASSOCIATED WITH THIS PROJECT.

CONTRACTOR SHALL PAY PARTICULAR ATTENTION TO THE FOLLOWING MINIMUM STANDARDS:

1. Permanent or temporary soil stabilization shall be applied to denuded areas within seven days after final grade is reached on any portion of the site. Temporary soil stabilization shall be applied within seven days to denuded areas that may not be at final grade but will remain dormant for longer than 14 days. Permanent stabilization shall be applied to areas that are to be left dormant for more than one year. **APPLY SEEDING MIXTURES IN ACCORDANCE WITH SPECIFICATIONS 3.31 AND 3.32 OF THE VIRGINIA EROSION AND SEDIMENT CONTROL HANDBOOK (YESCH) TO ALL AREAS THAT DO NOT HAVE A NON-ERODABLE SURFACE AS SHOWN ON THE PLAN.**

2. During construction of the project, soil stock piles and borrow areas shall be stabilized or protected with sediment trapping measures. The applicant is responsible for the temporary protection and permanent stabilization of all soil stockpiles on site as well as borrow areas and soil intentionally transported from the project site. **NO SOIL STOCKPILES ARE PROPOSED WITH THESE PLANS.**

3. A permanent vegetative cover shall be established on denuded areas not otherwise permanently stabilized. Permanent vegetation shall not be considered established until a ground cover is achieved that is uniform, mature enough to survive and will inhibit erosion. **SEE MINIMUM STANDARD 1.**

4. Sediment basins and traps, perimeter dikes, sediment barriers and other measures intended to trap sediment shall be constructed as a first step in any land-disturbing activity and shall be made functional before upslope land disturbance takes place. **INSTALL EROSION CONTROL MEASURES AS OUTLINED IN THE CONSTRUCTION SEQUENCE.**

5. Stabilization measures shall be applied to earthen structures such as dams, dikes and diversions immediately after installation. **APPLY TEMPORARY SEEDING TO TEMPORARY DIVERSION DIKES AND ANY OTHER EARTHEN STRUCTURES IMMEDIATELY FOLLOWING CONSTRUCTION.**

6. Sediment traps and sediment basins shall be designed and constructed based upon the total drainage area to be served by the trap or basin.

a. The minimum storage capacity of a sediment trap shall be 134 cubic yards per acre of drainage area and the trap shall only control drainage areas less than three acres.
b. Surface runoff from disturbed areas that is comprised of flow from drainage areas greater than or equal to three acres shall be controlled by a sediment basin. The minimum storage capacity of a sediment basin shall be 134 cubic yards per acre of drainage area. The outfall system shall, at a minimum, maintain the structural integrity of the basin during a 25-year storm of 24-hour duration. Runoff coefficients used in runoff calculations shall correspond to a bare earth condition or those conditions expected to exist while the sediment basin is utilized.

NO SEDIMENT TRAPS OR BASINS ARE PROPOSED WITH THIS PLAN.

7. Cut and fill slopes shall be designed and constructed in a manner that will minimize erosion. Slopes that are found to be eroding excessively within one year of permanent stabilization shall be provided with additional slope stabilization measures. **ERODED ANY AREAS THAT DO NOT HAVE AN ESTABLISHMENT OF A GOOD STAND OF GRASS AFTER INITIAL APPLICATION OF PERMANENT SEEDING. ADDITIONAL SLOPE STABILIZATION MEASURES ARE TO BE CONSIDERED AS CONDITIONS DICTATE.**

8. Concentrated runoff shall not flow down cut or fill slopes unless contained within an adequate temporary or permanent channel, flume or slope drain structure. **NO CONCENTRATED RUNOFF SHALL FLOW DOWN CUT OR FILL SLOPES AND SHALL BE DIVERTED AS NECESSARY.**

9. Whenever water seeps from a slope face, adequate drainage or other protection shall be provided. **THE CONTRACTOR SHALL CONTACT THE ENGINEER IMMEDIATELY UPON THE DISCOVERY OF ANY WATER SEEPS.**

10. All storm sewer inlets that are made operable during construction shall be protected so that sediment-laden water cannot enter the conveyance system without first being filtered or otherwise treated to remove sediment. **INLET PROTECTION SHALL BE APPLIED TO ALL NEW STORM SEWER INLETS BEFORE BEING MADE OPERABLE.**

11. Before newly constructed stormwater conveyance channels or pipes are made operational, adequate outlet protection and any required temporary or permanent channel lining shall be installed in both the conveyance channel and receiving channel. **NO OUTLET PROTECTION IS PROPOSED WITH THIS PROJECT.**

12. When work in a live watercourse is performed, precautions shall be taken to minimize encroachment, control sediment transport and stabilize the greatest extent possible during construction. Nonerodible material shall be used for the construction of causeways and cofferdams. Earthen fill may be used for these structures if armored by nonerodible cover materials. **NO WORK WITHIN LIVE WATERCOURSES IS PROPOSED FOR THIS PROJECT.**

13. When a live watercourse must be crossed by construction vehicles more than twice in any six-month period, a temporary vehicular stream crossing constructed of nonerodible material shall be provided. **NO WORK WITHIN LIVE WATERCOURSES IS PROPOSED FOR THIS PROJECT.**

14. All applicable federal, state and local regulations pertaining to working in or crossing live watercourses shall be met. **NO WORK WITHIN LIVE WATERCOURSES IS PROPOSED FOR THIS PROJECT.**

15. The bed and banks of a watercourse shall be stabilized immediately after work in the watercourse is completed. **NO WORK WITHIN LIVE WATERCOURSES IS PROPOSED FOR THIS PROJECT.**

16. Underground utility lines shall be installed in accordance with the following standards in addition to other applicable criteria:
a. No more than 500 linear feet of trench may be opened at one time.
b. Excavated material shall be placed on the uphill side of trenches.
c. Effluent from dewatering operations shall be filtered or passed through an approved sediment trapping device, or both, and discharged in a manner that does not adversely affect flowing streams or off-site property.
d. Material used for backfilling trenches shall be properly compacted in order to minimize erosion and promote stabilization.
e. Restoration shall be accomplished in accordance with these regulations.
f. Applicable safety regulations shall be complied with.

UNDERGROUND UTILITY LINES SHALL BE INSTALLED IN ACCORDANCE WITH THE STANDARDS ABOVE.
17. Where construction vehicle access routes intersect paved or public roads, provisions shall be made to minimize the transport of sediment by vehicular tracking onto the paved surface. Where sediment is transported onto a paved or public road surface, the road surface shall be cleaned thoroughly at the end of each day. Sediment shall be removed from the roads by shoveling or sweeping and transported to a sediment control disposal area. Street washing shall be allowed only after sediment is removed in this manner. This provision shall apply to individual development lots as well as to larger land-disturbing activities. **ADQUATE MEANS SHALL BE PROVIDED FOR THE CLEANING OF MUD AND SEDIMENT FROM CONSTRUCTION VEHICLES PRIOR TO ENTERING PUBLIC STREETS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING ANY MUD AND SEDIMENT TRANSPORTED FROM THIS SITE ONTO THE PUBLIC STREETS.**

18. All temporary erosion and sediment control measures shall be removed within 30 days after final site stabilization or after the temporary measures are no longer needed, unless otherwise authorized by the local program authority. Trapped sediment and the disturbed soil areas resulting from the disposition of temporary measures shall be permanently stabilized to prevent further erosion and sedimentation. **EROSION & SEDIMENT CONTROL MEASURES SHALL NOT BE REMOVED WITHOUT ROANOKE CITY PERMISSION AND SHALL BE IN ACCORDANCE WITH ABOVE REQUIREMENTS.**

MINIMUM STANDARDS CONTINUED:

19. Properties and waterways downstream from development sites shall be protected from sediment deposition, erosion and damage due to increases in volume, velocity and peak flow rate of stormwater runoff for the duration of 24-hour duration in accordance with the following standards and criteria. Stream restoration and relocation projects that incorporate natural channel design concepts are not man-made channels and shall be exempt from any flow rate capacity and velocity requirements for natural or man-made channels:

a. Concentrated stormwater runoff leaving a development site shall be discharged directly into an adequate natural or man-made receiving channel, pipe or storm sewer system. For those sites where runoff is discharged into a pipe or pipe system, downstream stability analyses at the outfall of the pipe or pipe system shall be performed.

b. Adequacy of all channels and pipes shall be verified in the following manner:

(1) The applicant shall demonstrate that the total drainage area to the point of analysis within the channel is one hundred times greater than the contributing drainage area of the project in question; or
(2) (a) Natural channels shall be analyzed by the use of a two-year storm to verify that stormwater will not overtop channel banks nor cause erosion of channel bed or banks.
(b) All previously constructed man-made channels shall be analyzed by the use of a ten-year storm to verify that stormwater will not overtop its banks and by the use of a two-year storm to demonstrate that stormwater will not cause erosion of channel bed or banks; and
(c) Pipes and storm sewer systems shall be analyzed by the use of a ten-year storm to verify that stormwater will be contained within the pipe or system.

c. If existing natural receiving channels or previously constructed man-made channels or pipes are not adequate, the applicant shall:

(1) Improve the channels to a condition where a ten-year storm will not overtop the banks and a two-year storm will not cause erosion to channel bed or banks; or
(2) Improve the pipe or pipe system to a condition where the ten-year storm is contained within the appurtenances;
(3) Develop a site design that will not cause the pre-development peak runoff rate from a two-year storm to increase when runoff outfalls into a natural channel or will not cause the pre-development peak runoff rate from a ten-year storm to increase when runoff outfalls into a man-made channel; or
(4) Provide a combination of channel improvement, stormwater detention or other measures which is satisfactory to the VESCP authority to prevent downstream erosion.

d. The applicant shall provide evidence of permission to make the improvements.

e. All hydrologic analyses shall be based on the existing watershed characteristics and the ultimate development of the subject project.

f. If the applicant chooses an option that includes stormwater detention, he shall obtain approval from the VESCP of a plan for maintenance of the detention facilities. The plan shall set forth the maintenance requirements of the facility and the person responsible for performing the maintenance.

g. Outfall from a detention facility shall be discharged to a receiving channel, and energy dissipater shall be placed at the outfall of all detention facilities as necessary to provide a stabilized transition from the facility to the receiving channel.

h. All on-site channels must be verified to be adequate.

i. Increased volumes of sheet flows that may cause erosion or sedimentation on adjacent property shall be diverted to a stable outlet, adequate channel, pipe or pipe system, or to a detention facility.

j. In applying these stormwater runoff criteria, individual lots or parcels in a residential, commercial or industrial development shall not be considered to be separate development projects. Instead, the development, as a whole, shall be considered to be a single development project. Hydrologic parameters that reflect the ultimate development condition shall be used in all engineering calculations.

k. All measures used to protect properties and waterways shall be employed in a manner which minimizes impacts on the physical, chemical and biological integrity of rivers, streams and other waters of the state.

l. Any plan approved prior to July 1, 2014, that provides for stormwater management that addresses any flow rate capacity and velocity requirements for natural or man-made channels shall satisfy the flow rate capacity and velocity requirements for natural and man-made channels if the practices are designed to:

(i) detain the water quality volumes and release it over 48 hours;
(ii) detain and release over 24-hour period the expected rainfall resulting from the one year, 24-hour storm and,
(iii) reduce the allowable peak flow rate resulting from the 1.5, 2, and 10-year, 24-hour storms to a level that is less than or equal to the peak flow rate from the site assuming it was in good forested condition, achieved through multiplication of the forested peak flow rate by a reduction factor that is equal to the runoff volume from the site in its proposed condition, and shall be exempt from any flow rate capacity and velocity requirements for natural or man-made channels as defined in any regulations promulgated pursuant to 621-44.15.54 or 621-44.15.65 of the Act.

m. For plans approved on and after July 1, 2014, the flow rate capacity and velocity requirements of 621-44.15.52 A of the Act and this subsection shall be satisfied by compliance with water quantity requirements in the Stormwater Management Act (621-44.15.24 et seq. of the Code of Virginia) and attendant regulations, unless such land-disturbing activities are in accordance with 9VAC25-870-48 of the Virginia Stormwater Management Program (VSMP) Permit Regulations.

n. Compliance with the water quantity minimum standards set out in 9VAC25-870-66 of the Virginia Stormwater Management Program (VSMP) Permit Regulations shall be deemed to satisfy the requirements of Minimum Standard 19.

THIS PROJECT COMPLIES WITH THE WATER QUANTITY MINIMUM STANDARDS BY PROVIDING AN UNDERGROUND DETENTION FACILITY TO MEET BOTH THE CHANNEL PROTECTION AND FLOOD PROTECTION REQUIREMENTS. REFER TO THE STORMWATER MANAGEMENT CALCULATIONS FOUND IN THE "PROJECT CALCULATIONS" WORKBOOK ASSOCIATED WITH THIS PROJECT.

GENERAL EROSION AND SEDIMENT CONTROL NOTES, ROANOKE CITY, VIRGINIA

ES-1: UNLESS OTHERWISE INDICATED, ALL VEGETATIVE AND STRUCTURAL EROSION AND SEDIMENT CONTROL PRACTICES SHALL BE CONSTRUCTED AND MAINTAINED ACCORDING TO MINIMUM STANDARDS AND SPECIFICATIONS OF THE VIRGINIA EROSION AND SEDIMENT CONTROL HANDBOOK AND VIRGINIA REGULATIONS VR 625-02-00 EROSION AND SEDIMENT CONTROL REGULATIONS.

ES-2: THE PLAN APPROVING AUTHORITY MUST BE NOTIFIED ONE WEEK PRIOR TO THE ONSITE PRECONSTRUCTION CONFERENCE, ONE WEEK PRIOR TO THE COMMENCEMENT OF LAND DISTURBING ACTIVITY, AND ONE WEEK PRIOR TO THE FINAL INSPECTION.

ES-3: ALL EROSION AND SEDIMENT CONTROL MEASURES ARE TO BE PLACED PRIOR TO OR AS THE FIRST STEP IN CLEARING.





ES-4: A COPY OF THE APPROVED EROSION AND SEDIMENT CONTROL PLAN AND NARRATIVE, AS WELL AS A COPY OF THE LAND DISTURBING PERMIT, SHALL BE MAINTAINED ON THE SITE AT ALL TIMES. THE EROSION AND SEDIMENT CONTROL ADMINISTRATOR WILL DELIVER THESE MATERIALS AT THE ONSITE PRECONSTRUCTION CONFERENCE.

ES-5: PRIOR TO COMMENCING LAND DISTURBING ACTIVITIES IN AREAS OTHER THAN INDICATED ON THESE PLANS (INCLUDING, BUT NOT LIMITED TO, OFF-SITE BORROW OR WASTE AREAS), THE CONTRACTOR SHALL SUBMIT A SUPPLEMENTARY EROSION CONTROL PLAN TO THE OWNER FOR REVIEW AND APPROVAL BY THE PLAN APPROVING AUTHORITY.


ES-6: THE CONTRACTOR IS RESPONSIBLE FOR INSTALLATION OF ANY ADDITIONAL EROSION CONTROL MEASURES NECESSARY TO PREVENT EROSION AND SEDIMENTATION AS DETERMINED BY THE PLAN APPROVING AUTHORITY.

ES-7: ALL DISTURBED AREAS ARE TO DRAIN TO APPROVED SEDIMENT CONTROL MEASURES AT ALL TIMES DURING THE LAND DISTURBING ACTIVITIES AND DURING SITE DEVELOPMENT UNTIL FINAL STABILIZATION IS ACHIEVED.

ES-9: THE CONTRACTOR SHALL INSPECT ALL EROSION CONTROL MEASURES PERIODICALLY AND AFTER EACH RUNOFF-PRODUCING RAIN EVENT. ANY NECESSARY REPAIRS OR CLEANUP TO MAINTAIN THE EFFECTIVENESS OF THE EROSION CONTROL DEVICES SHALL BE MADE IMMEDIATELY.

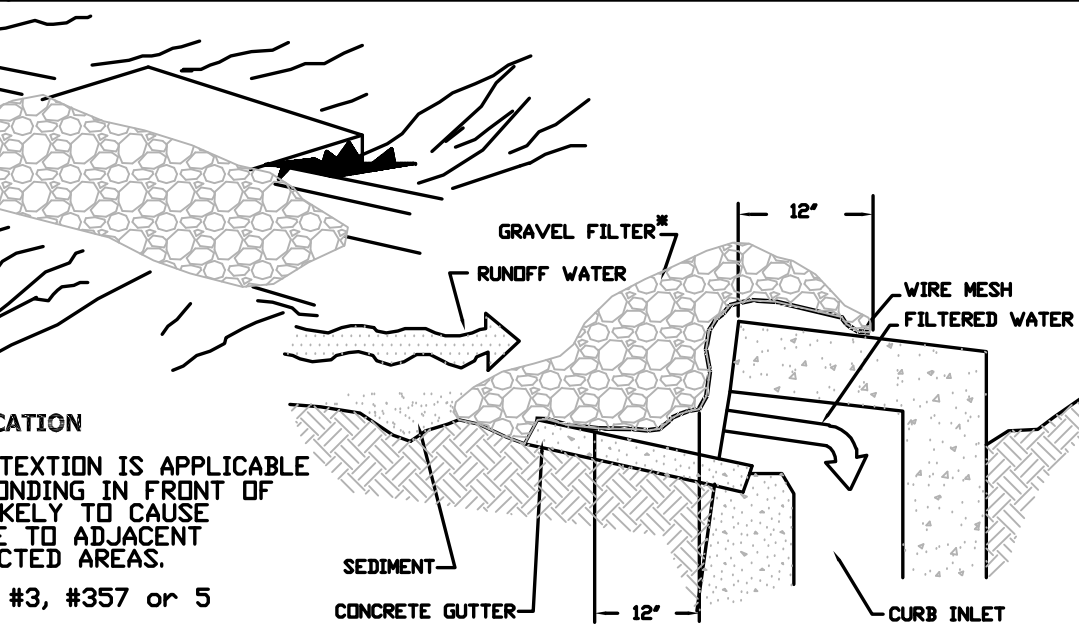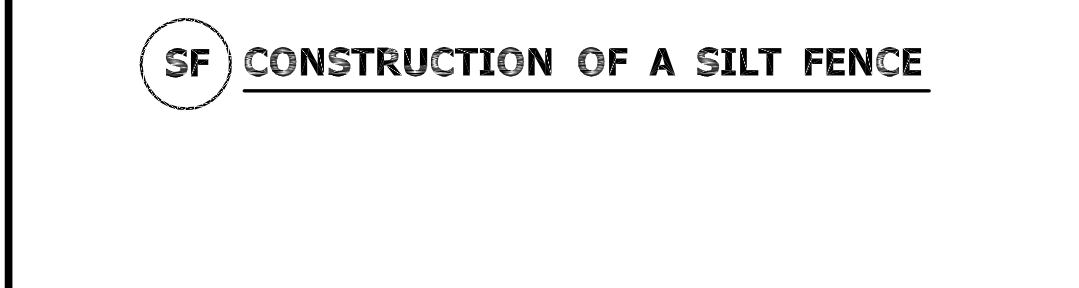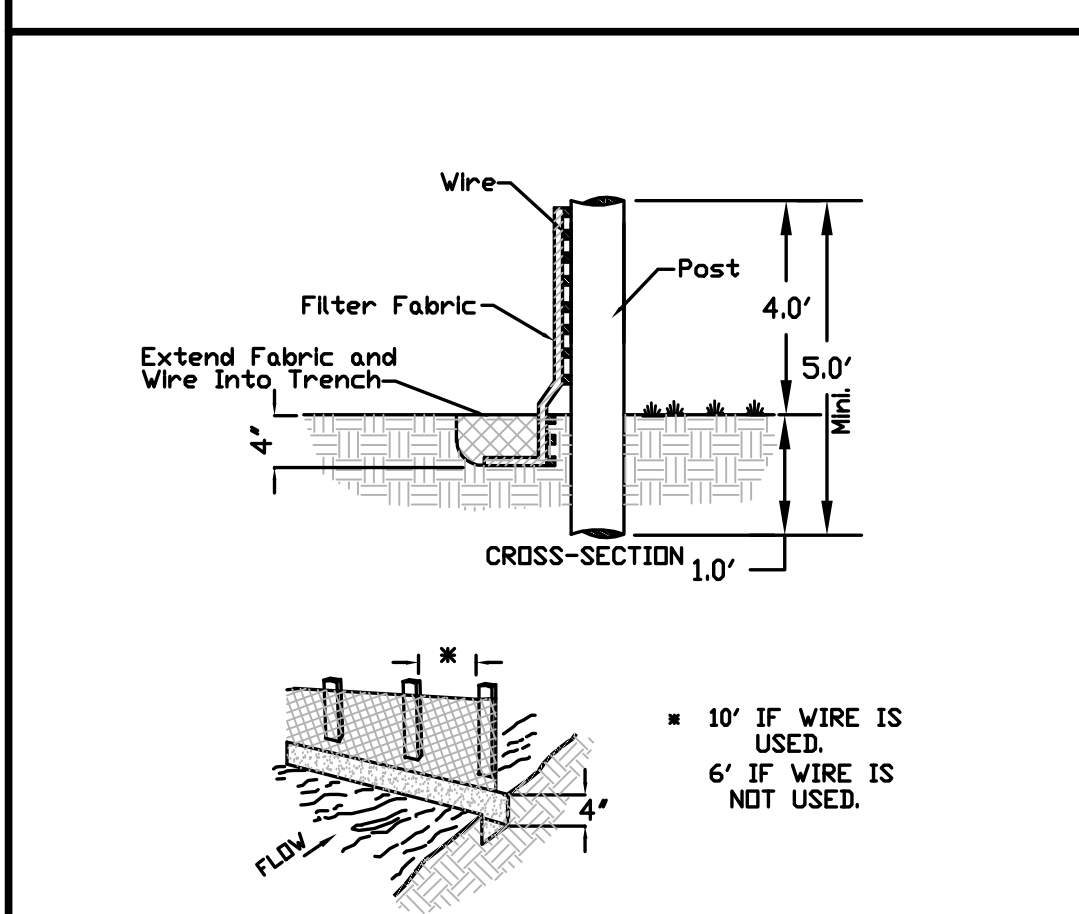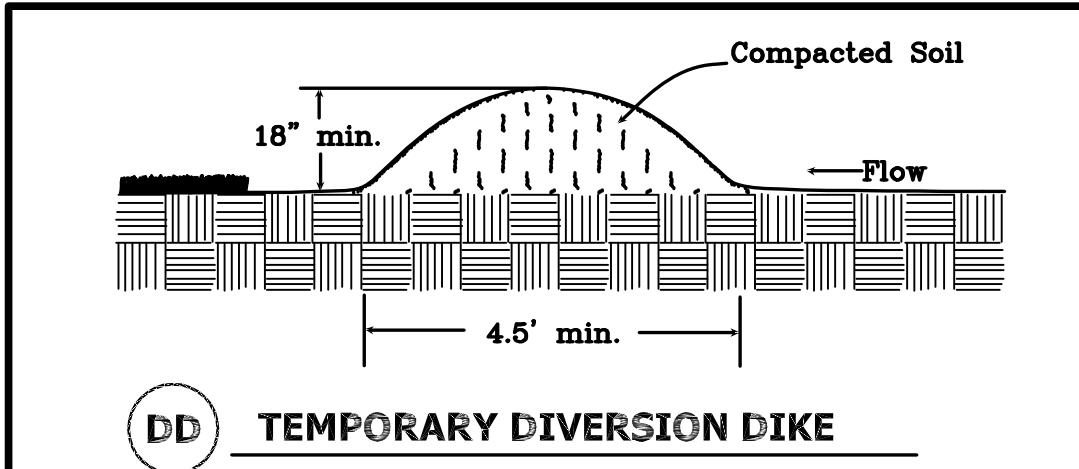

IP GRAVEL CURB INLET SEDIMENT FILTER

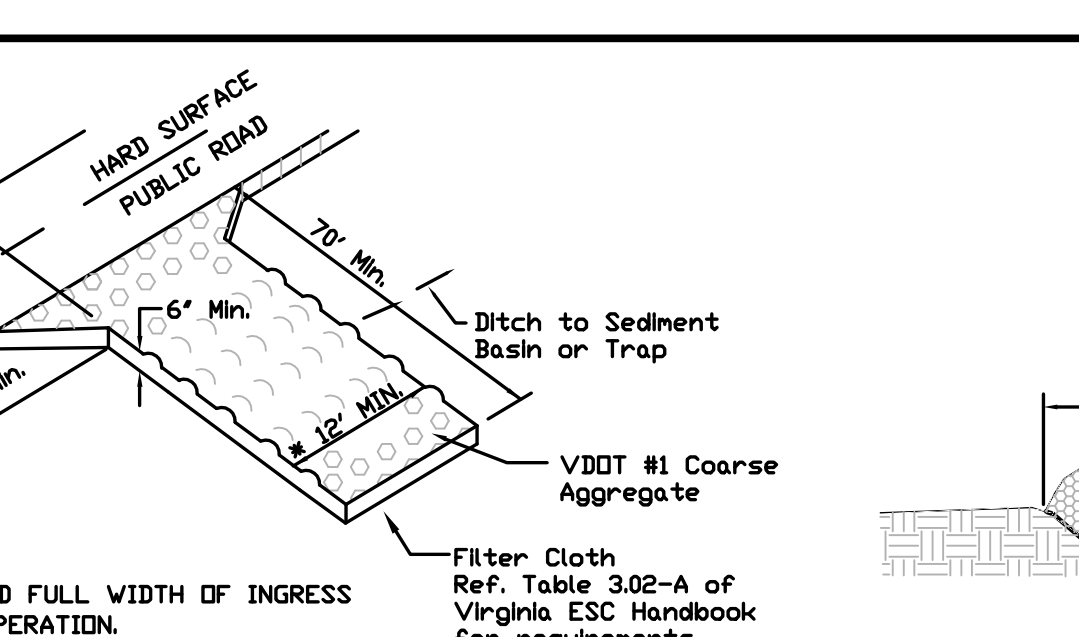

CE TEMPORARY GRAVEL CONSTRUCTION ENTRANCE

TEMPORARY STABILIZATION

TEMPORARY SOIL STABILIZATION SHALL BE APPLIED WITHIN SEVEN DAYS TO DENUDED AREAS THAT MAY NOT BE AT FINAL GRADE BUT WILL REMAIN DORMANT (UNDISTURBED) FOR LONGER THAN 14 DAYS. PERMANENT STABILIZATION SHALL BE APPLIED TO AREAS THAT ARE TO BE LEFT DORMANT FOR MORE THAN ONE YEAR.

TS TEMPORARY SEEDING MIXTURE

PLANTING DATES	SPECIES	RATE (LBS./ACRE)
SEPT. 1 - FEB. 15	50/50 MIX OF ANNUAL RYEGRASS (LOLIUM MULTI-FLORUM) & CEREAL (WINTER) RYE (SECALE CEREALE)	50 - 100
FEB. 16 - APR. 30	ANNUAL RYEGRASS (LOLIUM MULTI-FLORUM)	60 - 100
MAY. 1 - AUG. 31	GERMAN MILLET (SETARIA ITALICA)	50
LIME:	90 LB / 1000 SF PULVERIZED AGRICULTURAL LIMESTONE	
FERTILIZER:	10-10-10 @ 10 LB / 1000 SF	

PERMANENT STABILIZATION

ALL AREAS DISTURBED BY CONSTRUCTION WILL BE STABILIZED WITH PERMANENT SEEDING WITHIN 7 DAYS OR IMMEDIATELY FOLLOWING FINISH GRADING. SEEDING WILL BE DONE ACCORDING TO STANDARD AND SPECIFICATION 3.32 OF THE VIRGINIA EROSION AND SEDIMENT CONTROL HANDBOOK. PERMANENTLY SEEDER AREAS SHALL BE PROTECTED DURING ESTABLISHMENT WITH STRAW MULCH.

PS PERMANENT SEEDING MIXTURE

SEEDING AREA	SEEDING RATE:
GENERAL TURF	200 lbs/Ac
(Optional) PERENNIAL RYEGRASS	20 lbs/Ac
GENERAL SLOPE (3:1 or less)	128 lbs/Ac
K-31 FESCUE	2 lbs/Ac
RED TOP GRASS	2 lbs/Ac
SEASONAL NURSE CROP	20 lbs/Ac
SEASONAL NURSE CROP CROWNVEITCH	20 lbs/Ac


SEASONAL NURSE CROP SCHEDULE:
March, April - May 15th
May 16th - August 15th
August 16th - September, October
November - February

LIME: 90 LB / 1000 SF PULVERIZED AGRICULTURAL LIMESTONE
FERTILIZER: 10-20-10 @ 12 LB / 1000 SF

MULCH: IF REQUIRED, SHALL BE USED OVER ALL SEEDER AREAS AND SHALL BE APPLIED IN ACCORDANCE WITH SECTION 1.75 OF THE VIRGINIA EROSION AND SEDIMENT CONTROL HANDBOOK, LATEST EDITION.

SOIL CONDITIONING: INCORPORATION OF LIME AND FERTILIZER, SELECTION OF CERTIFIED SEED, MULCHING, MAINTENANCE OF NEW SEEDLINGS, AND RESEEDING SHALL BE IN ACCORDANCE WITH SPECIFICATIONS CONTAINED WITHIN THE VIRGINIA SOIL EROSION AND SEDIMENT CONTROL HANDBOOK, LATEST EDITION. ADDITIONAL SEEDING TO BE PERFORMED AS REQUIRED BY THE INSPECTOR.

SEED APPLICATION: APPLY SEED UNIFORMLY WITH A CYCLONE SEEDER, DRILL, CULTIPACKER, SEEDER, OR HYDROSEEDER ON A FIRM, FRABLE, SEEDBED. MAXIMUM SEEDING DEPTH SHALL BE 1/4 INCH.

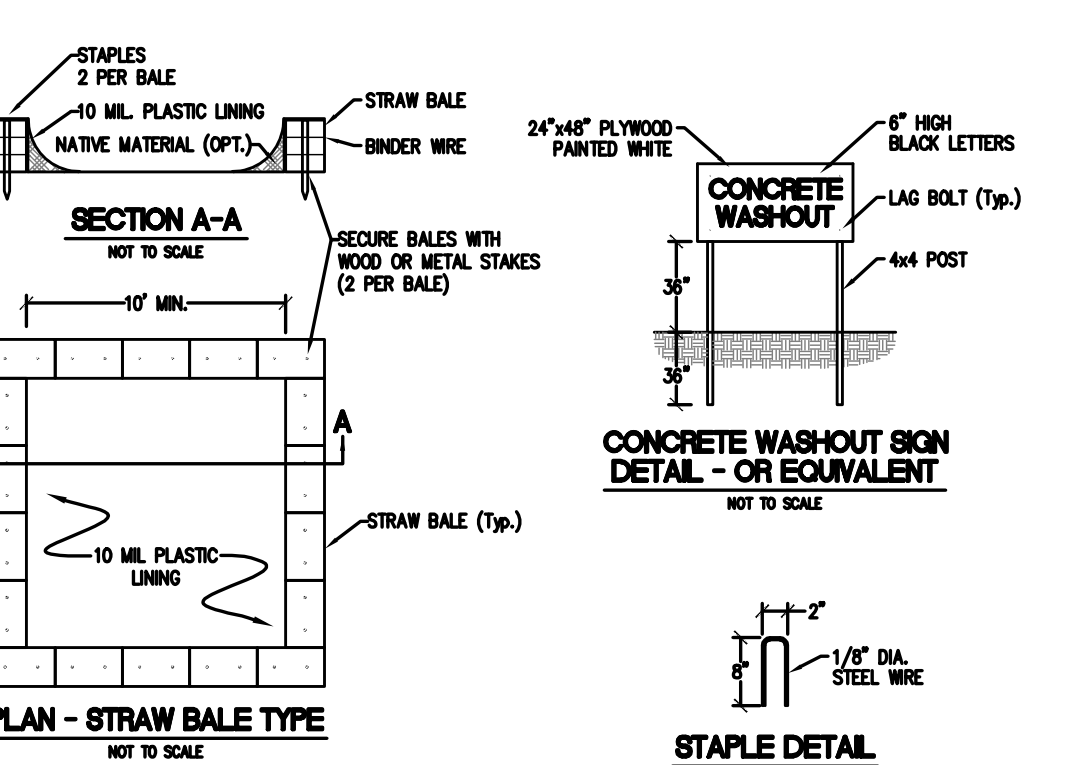


CONCRETE WASHOUT NOTES:

- TEMPORARY CONCRETE WASHOUT ACTUAL LAYOUT TO BE DETERMINED IN THE FIELD.
- TEMPORARY WASHOUT FACILITIES SHOULD BE LOCATED A MINIMUM OF 30' FROM STORM DRAIN INLETS, OPEN DRAINAGE CHANNELS AND WATERCOURSES.
- A CONCRETE WASHOUT SIGN SHALL BE INSTALLED WITHIN 30' OF THE TEMPORARY CONCRETE WASHOUT FACILITY.
- MATERIALS AND PROCEDURES USED TO CONSTRUCT ABOVE-GRADE TEMPORARY CONCRETE WASHOUT FACILITIES SHALL BE ADEQUATE FOR THE ANTICIPATED VOLUME OF USE FOR THE PROJECT.
- PLASTIC LINING MATERIAL SHALL BE A MINIMUM 10 ML POLYETHYLENE SHEETING, FREE OF TEARS, HOLES OR OTHER DEFECTS THAT WOULD COMPROMISE THE INTEGRITY OF THE LINING.
- ONCE CONCRETE WASTE MATERIAL HAS HARDENED, THE CONCRETE SHALL BE BROKEN UP, REMOVED AND DISPOSED OF OFF SITE IN ACCORDANCE WITH ALL DISPOSAL REGULATIONS.
- MATERIALS USED TO CONSTRUCT TEMPORARY CONCRETE WASHOUT FACILITIES SHALL BE REMOVED FROM THE SITE AND DISPOSED OF OR RECYCLED IN ACCORDANCE WITH ALL DISPOSAL REGULATIONS.
- HOLES, DEPRESSIONS OR OTHER GROUND DISTURBANCE CAUSED BY THE REMOVAL OF TEMPORARY CONCRETE WASHOUT FACILITIES SHALL BE BACKFILLED, REPAIRED AND STABILIZED TO PREVENT EROSION.

CW CONCRETE WASHOUT

NO.	TITLE	KEY	SYMBOL
3.02	TEMPORARY GRAVEL CONSTRUCTION ENTRANCE	CE	[Symbol]
3.03	CONSTRUCTION ROAD STABILIZATION	CRS	[Symbol]
3.05	SILT FENCE	SF	[Symbol]
3.09	DIVERSION DIKE	DD	[Symbol]
3.31	TEMPORARY SEEDING	TS	[Symbol]
3.32	PERMANENT SEEDING	PS	[Symbol]
3.35	MULCHING	MU	[Symbol]
3.36	SOIL STABILIZATION BLANKETS & MATTING	B/M	[Symbol]

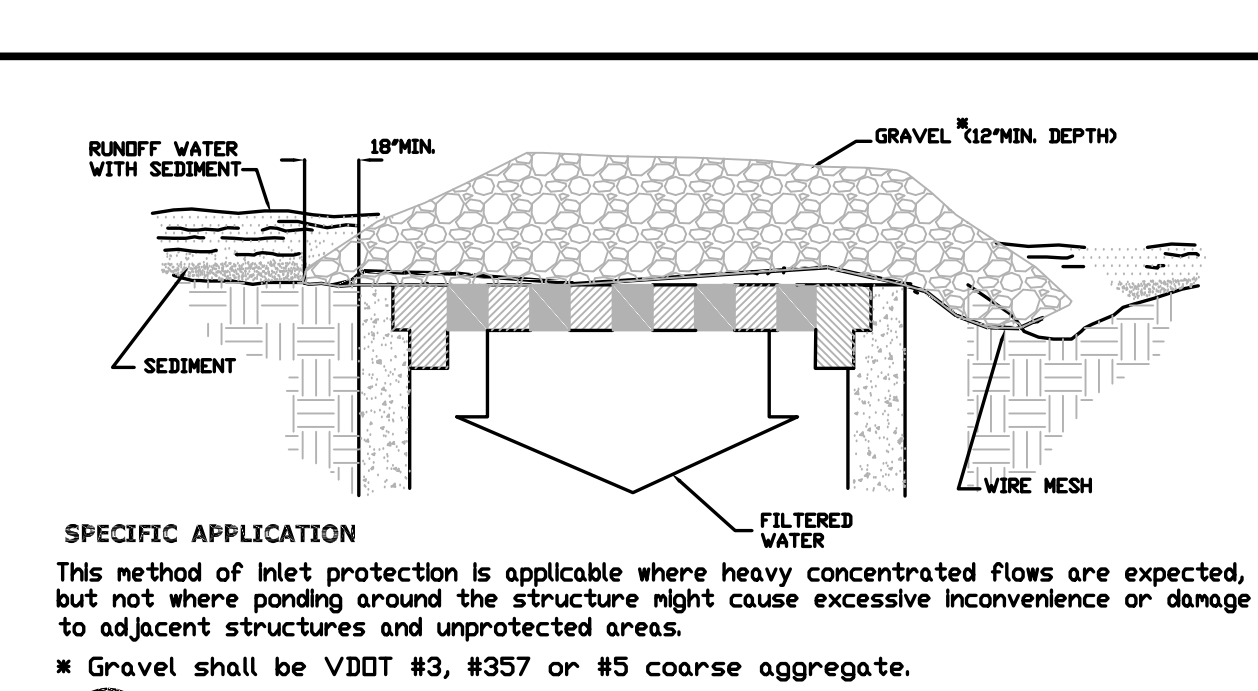

IP GRAVEL AND WIRE MESH DROP INLET SEDIMENT FILTER

Lumsden Associates, P.C.
ENGINEERS | SURVEYORS | PLANNERS

4664 BRAMBLETON AVENUE
P.O. BOX 26669
ROANOKE, VIRGINIA 24018

PHONE: (540) 774-4411
FAX: (540) 772-9445
WWW.LUMSDENPC.COM

HOWARD P. BOGGS, II
Lic. No. 000920
10/12/22

PRELIMINARY SITE PLAN
BLUE RIDGE MEMORIAL GARDENS
LOCATED AT
5721 AIRPORT ROAD, N.W.
TAX PARCEL ID: 06630103
CITY OF ROANOKE, VIRGINIA

REVISIONS

NO.	DATE	DESCRIPTION
1		
2		
3		
4		
5		

DATE: October 12, 2022
SCALE: NTS
COMMISSION NO: 21-009
SHEET 9 OF 12