

EROSION & SEDIMENT CONTROL NARRATIVE

PROJECT DESCRIPTION

The purpose of this project is to create a new 10-lot subdivision and provide significant site improvements in support of the development of the project. Extensive site grading and new utility services are planned as well as a new stormwater management pond.

EXISTING SITE CONDITIONS

The site consists of 8 existing residential properties situated along Autumn Lane in the City of Roanoke. The lots are clear of existing improvements. The terrain slopes south away from Autumn Lane with slopes averaging from 0 to 25%. An existing stream adjoins the rear of the lots. Please refer to the attached site plan for location of indicated topographical features.

ADJACENT AREAS

The site is bordered by single-family residential properties on both sides and across Autumn Lane. The project is bordered by wooded areas and a park to the South.

SOILS

Soils found at this site are common to the area. None of these soils have high erosion tendencies.

CRITICAL EROSION AREAS

- The potential critical erosion areas are:
1. Steep cut and fill slopes.
 2. The outlet of all culverts.

EROSION AND SEDIMENT CONTROL MEASURES

Unless otherwise indicated, all vegetative and structural erosion and sediment control practices shall be constructed and maintained according to minimum standards and specifications of the handbook. The minimum standards of the VESCR shall be adhered to unless otherwise waived or approved by a variance.

STRUCTURAL PRACTICES

1. Temporary Construction Entrance (Section 3.02)
One temporary construction entrance will be installed. Vehicles will be washed to limit tracking onto public roads. Should tracking occur the road will be immediately cleaned. Temporary straw bale barriers will be placed and entrenched and anchored as indicated on the site plan.
2. Straw Bale Barrier (Section 3.04)
3. Silt Fence (Section 3.05)
Temporary silt fences will be installed as indicated on the site plan.
4. Outlet Protection (Section 3.18)
Outlet protection will be placed at all discharge points from controlled flow to open flow. All outlet protection will be permanently designed and installed.
5. Surface Roughening (Section 3.29)
Surface roughening will be employed on all slopes exceeding 2:1.
6. Temporary Seeding (Section 3.31)
Temporary seeding will be placed on all disturbed areas that will not be brought to final grade within one year or less. Temporary seeding will aid in the reduction of dust and sediment. Temporary seeding will be Annual Ryegrass (100 #/ac), Feb 16 - April 30, German Millet (60 #/ac), May 1 - Aug. 31.
7. Permanent Seeding (Section 3.32)
After final grading permanent seeding will be employed to reduce erosion and sediment yield.

Seeding Specifications:

Permanent seeding will be Kentucky Bluegrass, blended to contain 4 or more varieties, with no one variety exceeding 30%. The seeding will be applied at 140 lb. per acre. On slopes 2:1 or greater a mixture of Crown Vetch (50%), Perennial Ryegrass (40%), and Redtop (10%) will be used.

All seeding, with required associated practices, will be in accordance with all applicable sections of the Virginia Erosion and Sediment Control

8. Dust Control (Section 3.39)
If arid conditions prevail dust control practices shall be employed as required by the inspector.
9. Riprap (Section 3.19)
Riprap shall be placed at the outlet of all pipes in accordance with VDOT standard EC-2 as indicated on the plans. Riprap along the ditches shall be VDOT Class 1 riprap installed over a six inch filter consisting of #57 stone.

MANAGEMENT

1. Construction should be sequenced so that grading operations can begin and end as quickly as possible.
2. Erosion and Sediment control devices shall be installed as the first step of construction.
3. Areas which are not to be disturbed shall be clearly marked by flags, signs, etc.
4. The grading contractor shall be responsible for the installation and maintenance of all erosion and sediment control practices. Inspections are to be made periodically and after every significant rainfall.
5. After achieving adequate stabilization, the temporary E&S controls will be cleaned up and removed.

PERMANENT STABILIZATION

All areas disturbed by construction shall be stabilized with permanent seeding immediately following finish grading. Seeding shall be done with Kentucky 31 Tall Fescue according to Std. & Spec. 3.32, PERMANENT SEEDING, of the handbook. Erosion control blankets will be installed over fill slopes which have been brought to final grade and have been seeded to protect the slopes from rill and gully erosion and to allow seed to germinate properly. Mulch (straw or fiber) will be used on relatively flat areas. In all seeding operations, seed, fertilizer and lime will be applied prior to mulching.

MAINTENANCE

In general, all erosion and sediment control measures will be checked daily and after each significant rainfall. Any items not found in accordance with the Virginia Erosion and Sediment Control Handbook will be immediately replaced and/or repaired. The following items will be checked in particular:

1. The gravel outlets will be checked regularly for sediment buildup which will prevent drainage. If the gravel is clogged by sediment, it shall be removed and cleaned or replaced.
2. The silt fence barrier will be checked regularly for undermining or deterioration of the fabric. Sediment shall be removed when the level of sediment deposition reaches half way to the top of the barrier.
3. The seeded areas will be checked regularly to ensure that a good stand is maintained. Areas should be fertilized and re-seeded as needed.

GENERAL


The erosion and sediment control measures shown on the construction plans are the minimum measures required. Due to construction phasing and other considerations all measures can not be shown. The owner, through his contractor, will employ whatever measures which may be required to assure that sediment laden runoff does not leave the site.

All materials and measures employed for erosion and sediment control will be in accordance with the Virginia Erosion and Sediment Control Handbook, latest edition.

If, during construction, additional Erosion and Sediment Control measures are deemed necessary, they shall be installed as directed by the Owner, Engineer or Local Government Agent.


This project is to be constructed consistent with the latest Virginia Erosion And Sediment Control Regulations.

DETAIL NUMBER: A&E_EROS-2

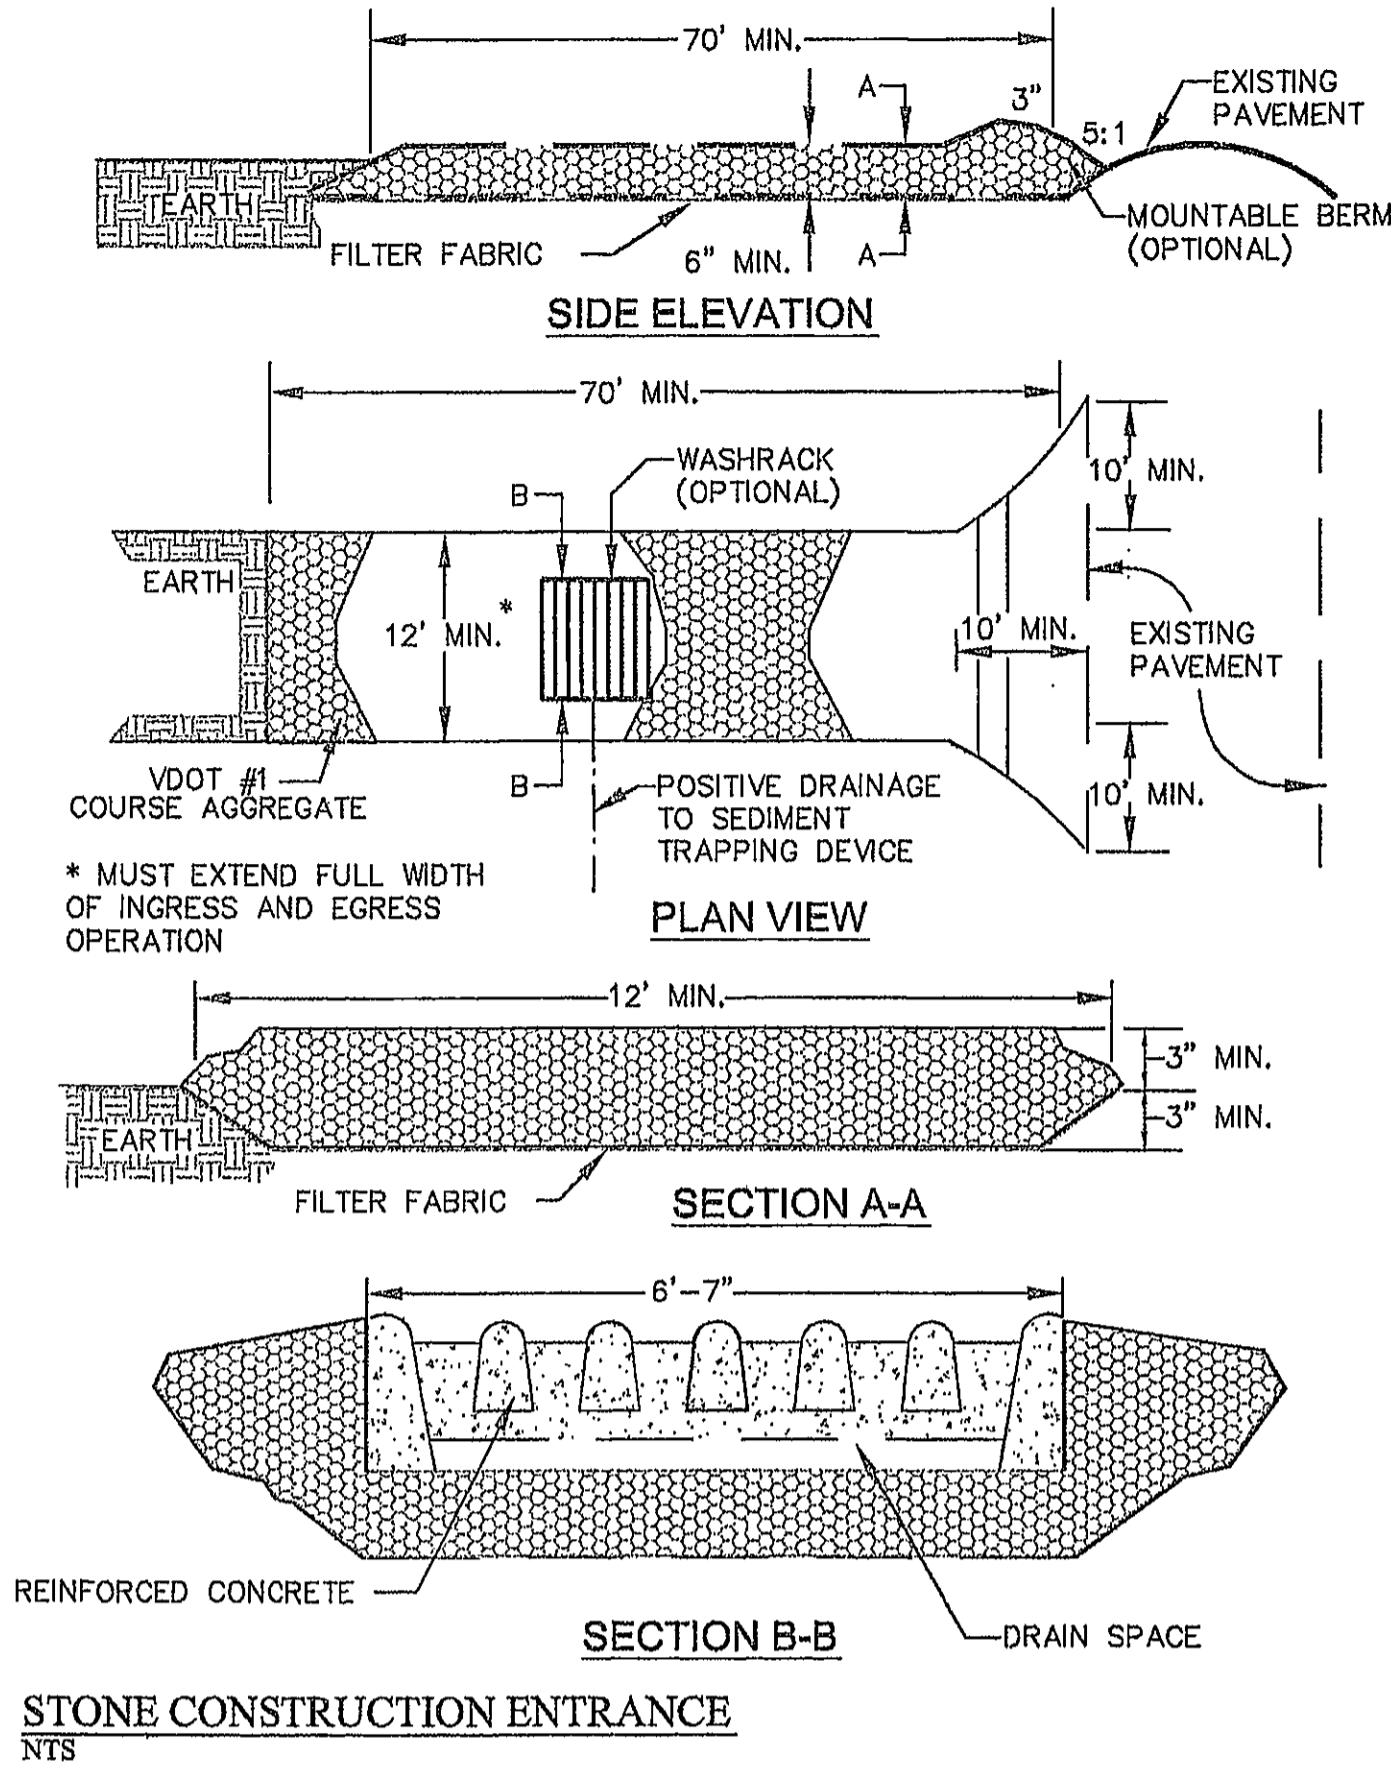

STONE CONSTRUCTION ENTRANCE
NTS


DETAIL NUMBER: A&E_3.18_1

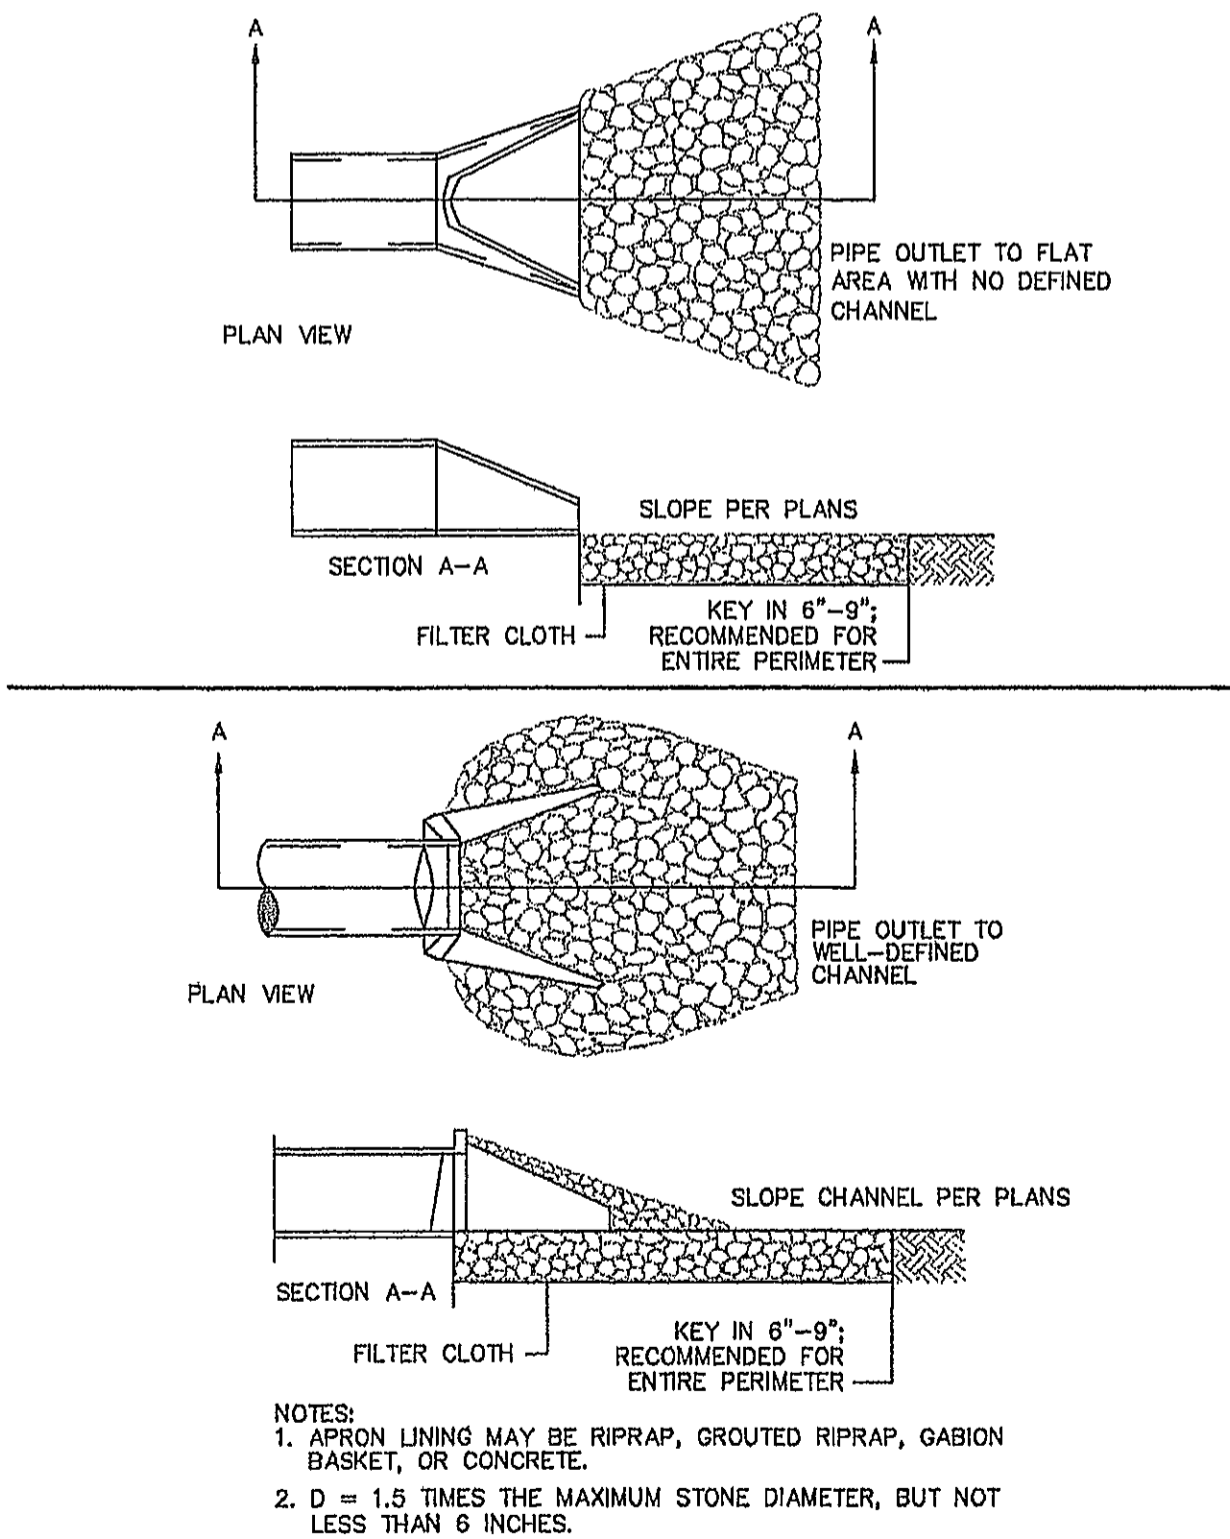

SOURCE: VA DSWC


PIPE OUTLET CONDITIONS
NTS

DETAIL NUMBER: A&E_EROS-1

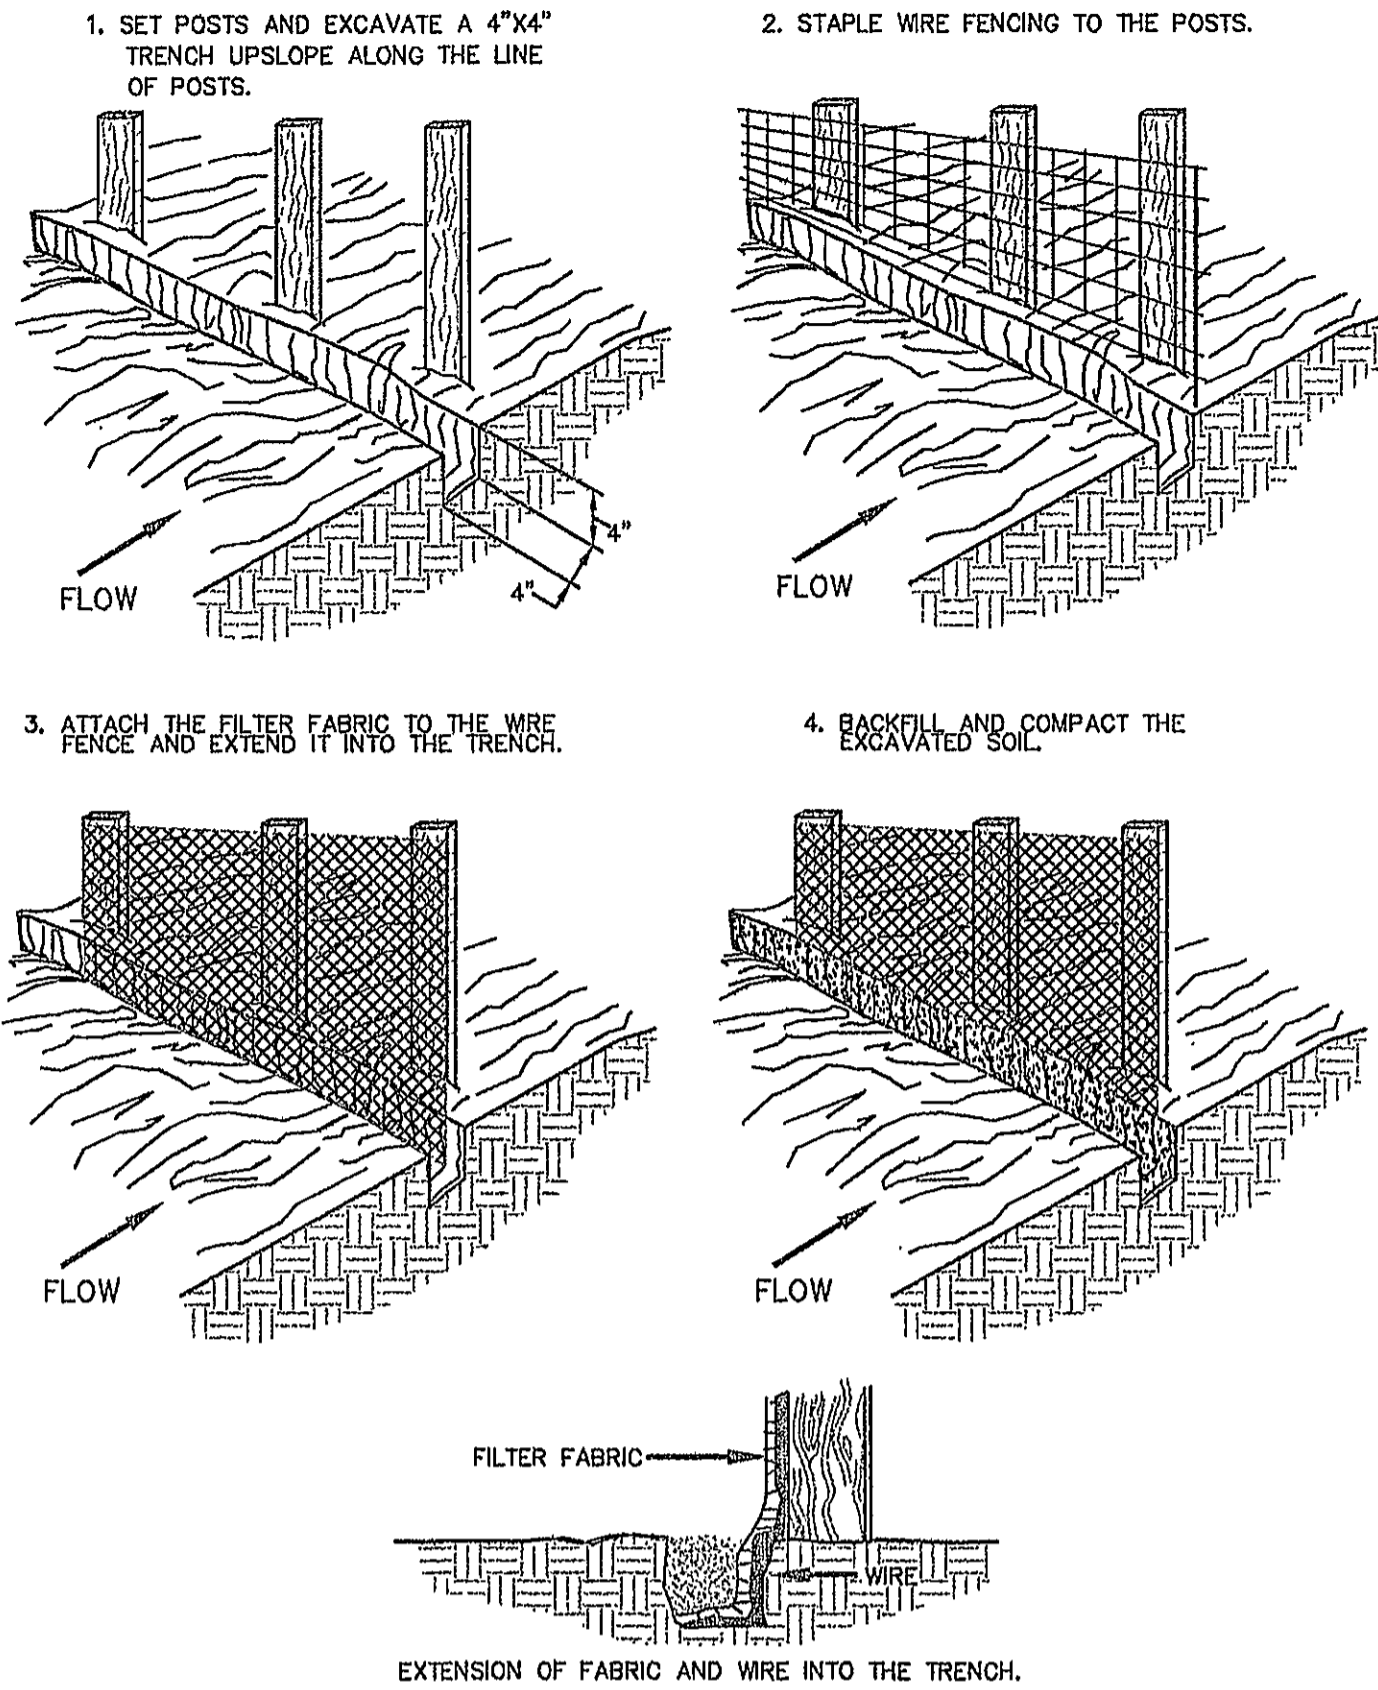


CONSTRUCTION OF SILT FENCE (W/WIRE SUPPORT)
NTS

DETAIL NUMBER: A&E_3.20-1

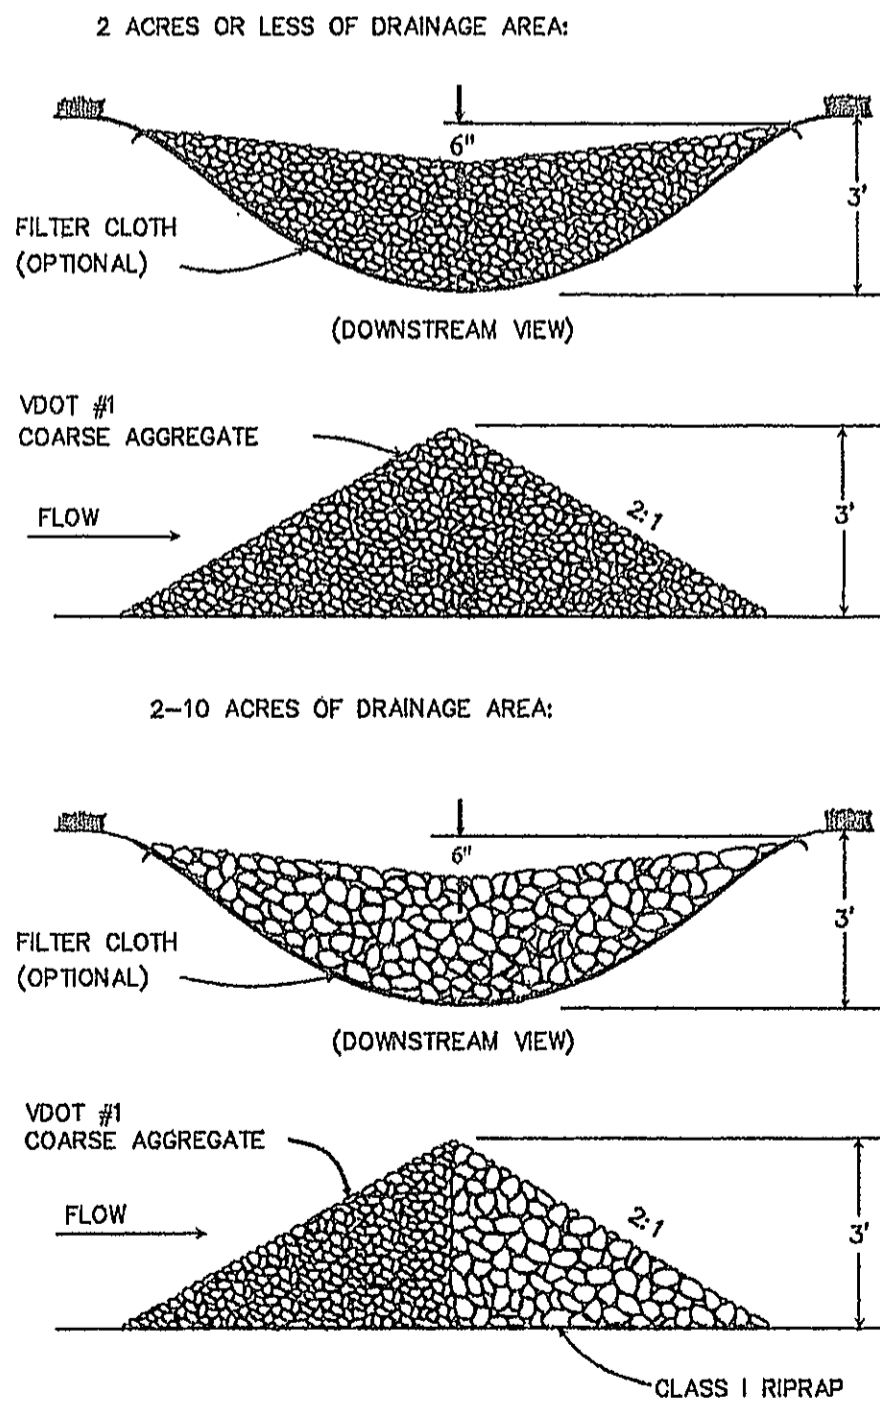

SOURCE: VA DSWC PLATE. 3.20-1

ROCK CHECK DAM
NTS

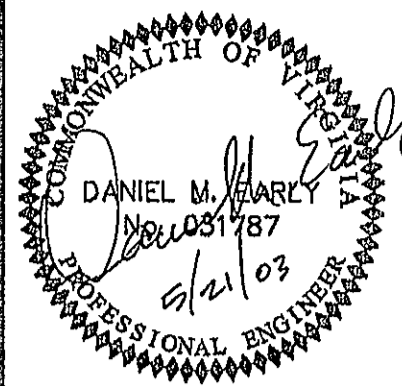

ACS DESIGN LLC
Architecture • Civil • Structural
5815 Airport Road, Suite C
Roanoke, Virginia 24012
Phone: 540 776 8626
Fax: 540 776 8627

**AUTUMN LANE SUBDIVISION
SITE DEVELOPMENT PLAN
CITY OF ROANOKE, VIRGINIA**

DRAWN BY: DME

DESIGNED BY: DME

CHECKED BY:

DATE: 4/15/03

SCALE: AS NOTED

REVISIONS

DATE	REVISION	COMMENT

SHEET No.

C1.1
ABBREVIATIONS & LEGENDS

JOB No. 03023