2016 ROAD & BRIDGE STANDARDS

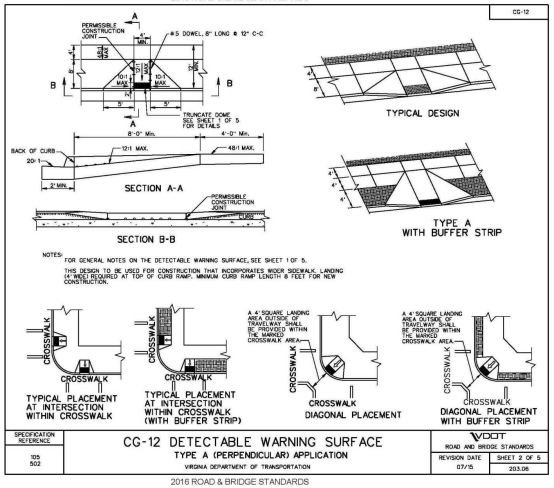

2016 ROAD & BRIDGE STANDARDS

2016 ROAD & BRIDGE STANDARDS

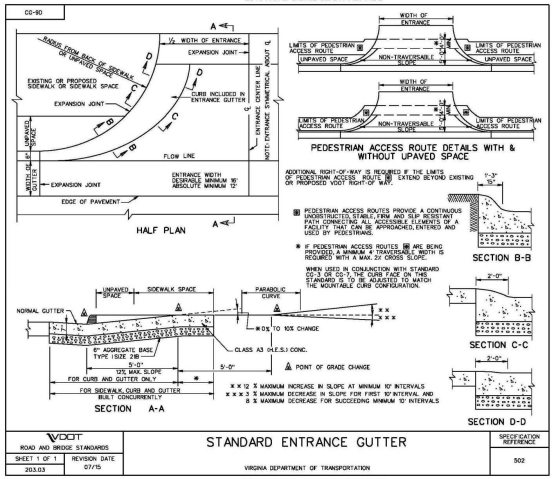

2016 ROAD & BRIDGE STANDARDS



HEAVY DUTY ASPHALT PAVEMENT SECTION

NO SCALE

1. 8" STONE BASE MUST BE PLACED IN TWO LIFTS OF NO MORE THAN 4" EACH.
2. A TACK COAT SHALL BE APPLIED BETWEEN ASPHALT PAVEMENT LAYERS.
3. G.C. TO ENSURE A MINIMUM OF 95% COMPACATION OF THE SUBGRADE PRIOR TO STONE/ASPHALT PLACEMENT.



STANDARD ASPHALT PAVEMENT SECTION

NO SCALE

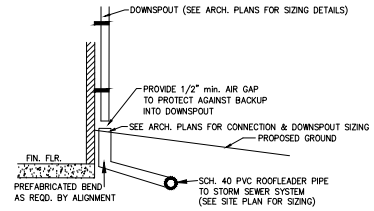

DOWNSPOUT CONNECTION DETAIL

N.T.S.



PIPE BOLLARD DETAIL

NO SCALE



NOTE:
G.C. SHALL BE RESPONSIBLE FOR OBTAINING ADEQUATE SUB-GRADE COMPACTION.

SECTION THROUGH DUMPSTER PAD AND DRIVE-THRU

NO SCALE

City of Roanoke
Planning, Building, & Development
COMPREHENSIVE DEVELOPMENT PLAN
APPROVED
by Ken Richardson
03/24/2020

BALZER AND ASSOCIATES, INC.
REFLECTING TOMORROW
www.balzer.cc
Roanoke
New River Valley
Richmond
Staunton
Harrisonburg
RESIDENTIAL LAND DEVELOPMENT ENGINEERING
SITE DEVELOPMENT ENGINEERING
LAND USE PLANNING & ZONING
LANDSCAPE ARCHITECTURE
LAND SURVEYING
ARCHITECTURE
STRUCTURAL ENGINEERING
TRANSPORTATION ENGINEERING
ENVIRONMENTAL & SOIL SCIENCE
WETLAND DELINEATIONS & STREAM EVALUATIONS
Balzer and Associates, Inc.
1208 Corporate Circle
Roanoke, VA 24018
540-772-9580
FAX 540-772-8050

COMMONWEALTH OF VIRGINIA
CHRISTOPHER P. BURNS
Lic. No.047338
2/18/19
PROFESSIONAL ENGINEER

STARBUCKS
3601 BLUE HILLS VILLAGE DRIVE NE
SITE DETAILS 2
CITY OF ROANOKE, VIRGINIA

DRAWN BY	CPB
DESIGNED BY	CPB
CHECKED BY	BTC
DATE	12/18/18
SCALE	1"=20'

REVISIONS:
2/18/2019

SHEET NO.
C12
JOB NO. 04170055.00