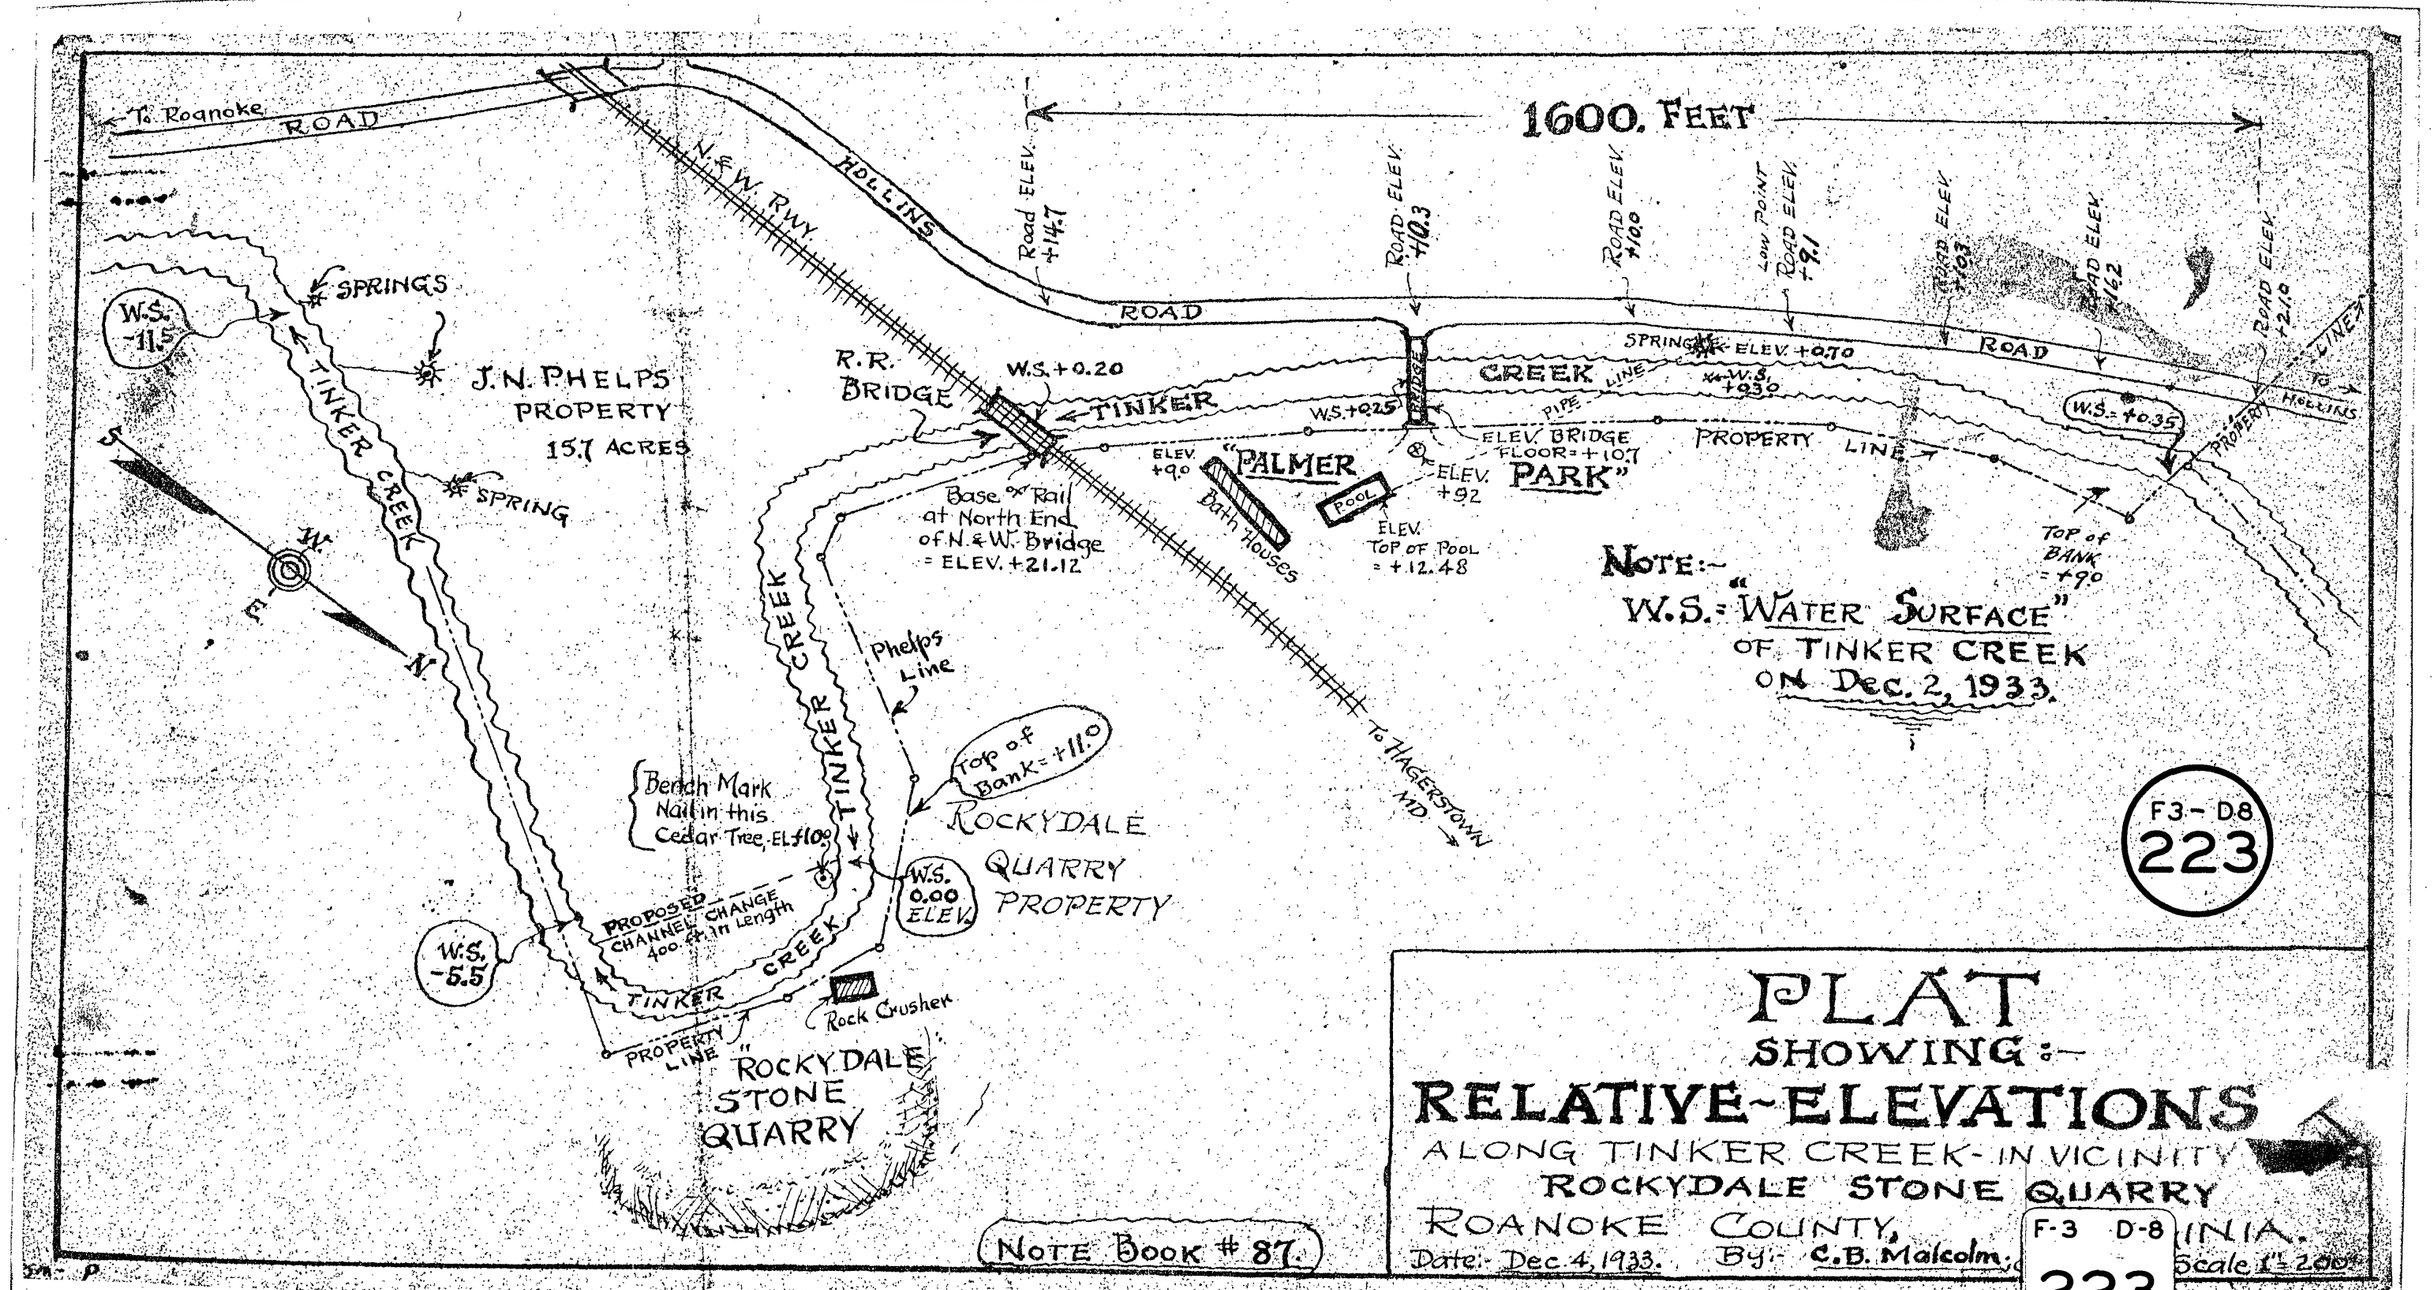
1600. FEET
To Roanoke
ROAD
N.&W. RWY.
HOLLINS
ROAD
Road ELEV. +14.7
ROAD ELEV. +10.3
ROAD ELEV. +10.0
Low Point ROAD ELEV. +9.1
ROAD ELEV. +10.3
ROAD ELEV. +16.2
ROAD ELEV. +21.0
SPRINGS
W.S. -11.5
TINKER CREEK
J.N. PHELPS PROPERTY
15.7 ACRES
SPRING
R.R. BRIDGE
W.S. +0.20
TINKER
CREEK
W.S. +0.25
BRIDGE
SPRING ELEV. +0.70
W.S. +0.30
PIPE LINE
ELEV. BRIDGE FLOOR = +10.7
PROPERTY LINE
W.S. +0.35
PROPERTY LINE TO HOLLINS
ELEV. +9.0
"PALMER PARK"
Bath Houses
POOL
ELEV. +9.2
ELEV. TOP OF POOL = +12.48
Base of Rail at North End of N.&W. Bridge = ELEV. +21.12
TOP of BANK = +9.0
NOTE:-
W.S. = "WATER SURFACE" OF TINKER CREEK ON Dec. 2, 1933.
Phelps Line
Top of Bank = +11.0
ROCKYDALE QUARRY PROPERTY
Bench Mark Nail in this Cedar Tree, EL. +10.5
W.S. 0.00 ELEV.
PROPOSED CHANNEL CHANGE 400. ft. in Length
W.S. -5.5
TINKER CREEK
Rock Crusher
PROPERTY LINE
"ROCKYDALE STONE QUARRY"
To HAGERSTOWN MD
F3 - D8
223
NOTE BOOK # 87.
PLAT
SHOWING:-
RELATIVE-ELEVATIONS
ALONG TINKER CREEK - IN VICINITY
ROCKYDALE STONE QUARRY
ROANOKE COUNTY, VIRGINIA.
Date:- Dec. 4, 1933.
By:- C.B. Malcolm.
Scale 1" = 200'
F-3 D-8
223