


HANDICAP SIGN NOTES:

- 1. EACH SIGN SHALL BE POST MOUNTED TO A POLE WITH NO SIGN EDGE LOWER THAN 4' AND NO HEIGHER THAN 7' TO THE FINISHED GRADE
- 2. ALL SIGNS SHALL BE REFLECTORIZED
- 3. ALL SIGNS SHALL BE SECURELY MOUNTED TO A GALVANIZED STEEL CHANNEL POST.

HANDICAP SIGN DETAIL

NO SCALE

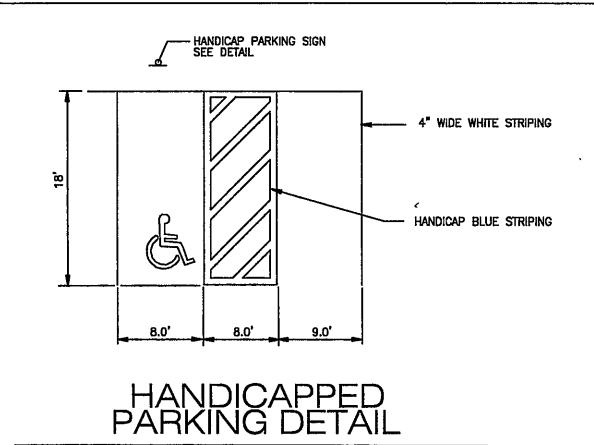

NTS

EROSION AND SEDIMENT CONTROL NARRATIVE

PROJECT DESCRIPTION: THE PURPOSE OF THIS PROJECT IS TO CONSTRUCT A NEW MEDICAL OFFICE BUILDING AND PARKING AREA TO ACCOMODATE THE TWO BUILDINGS. THE APPROXIMATE DISTURBED AREA FOR THIS PROJECT IS 1.5 ACRES.

EXISTING SITE CONDITIONS: THE SITE IS CURRENTLY DEVELOPED WITH A MEDICAL OFFICE BUILDING AND PAVED PARKING AREA. THE EXISTING BUILDING IS SERVED BY PUBLIC WATER & SEWER.

ADJACENT PROPERTY: THE PROPERTY IS BOUNDED BY C-1 ZONED PROPERTIES AND PETERS CREEK ROAD AND AIRPORT ROAD RIGHTS-OF-WAY.

OFF-SITE AREAS: IT IS NOT ANTICIPATED THAT ANY OFF-SITE AREAS WILL BE DISTURBED FOR THIS PROJECT. THE LOCATION OF ALL OFF-SITE FILL OR BORROW AREAS ASSOCIATED WITH THIS CONSTRUCTION PROJECT WILL BE PROVIDED TO ROANGE COUNTY DEPARTMENT OF COMMUNITY DEVELOPMENT. AN EROSION CONTROL PLAN OR MEASURES MAY BE REQUIRED FOR THIS AREA.

SOILS: A SUBSURFACE INVESTIGATION HAS NOT BEEN PROVIDED. SOIL INFORMATION IS AVAILABLE ON THE RESIDUAL SOILS THAT IS SUGGESTED IN THE "SOIL SURVEY OF ROANOKE COUNTY AND THE CITIES OF ROANOKE AND SALEM, VIRGINIA" AS PREPARED BY THE UNITED STATES DEPARTMENT OF AGRICULTURE. THIS SURVEY IDENTIFIES THE ORIGINAL SOIL IN THE AREA OF DEVELOPMENT MATERIAL IS ESTIMATED TO BE 24C - GROSECLOSE SILT LOAM.

CRITICAL EROSION AREAS: DOWNSTREAM PROPERTIES FROM THIS SITE SHALL BE PROTECTED BY SILT FENCE, DIVERSIONS AND THE PROPOSED SEDIMENT TRAP.

EROSION AND SEDIMENT CONTROL MEASURES: UNLESS OTHERWISE INDICATED, ALL VEGETATIVE AND STRUCTURAL EROSION AND SEDIMENT CONTROL PRACTICES SHALL BE CONSTRUCTED AND MAINTAINED ACCORDING TO MINIMUM STANDARDS AND SPECIFICATIONS OF THE "VIRGINIA EROSION AND SEDIMENT CONTROL HANDBOOK, THIRD EDITION" (VESCH). THE MINIMUM STANDARDS OF THE VESCH SHALL BE ADHERED TO UNLESS OTHERWISE DIRECTED BY THE LOCAL PROGRAM ADMINISTRATOR.

CONSTRUCTION ENTRANCE-STD. 3.02.....A STONE PAD, LOCATED AT POINTS OF VEHICULAR INGRESS AND EGRESS TO THE CONSTRUCTION SITE, TO REDUCE THE SOIL TRANSPORTED ONTO PUBLIC ROADS AND OTHER PAVED AREAS.

SILT FENCE-STD. 3.05.....A TEMPORARY BARRIER CONSTRUCTED ALONG THE PERIMENTER OF THE DISTURBED AREA AS REQUIRED TO INTERCEPT AND DETAIN SEDIMENT.

STORM DRAIN INLET PROTECTION-STD. 3.07.....A SEDIMENT FILTER OR AN EXCAVATED IMPOUNDING AREA AROUND A STORM DRAIN INLET TO PREVENT SEDIMENT FROM ENTERING STORM DRAINAGE SYSTEMS.

TEMPORARY DIVERSION DIKE-STD. 3.09.....A TEMPORARY RIDGE OF COMPACTED SOIL CONSTRUCTED AT THE TOP OR BASE OF A SLOPING DISTURBED AREA TO DIVERT RUNOFF FROM UPSLOPE DRAINAGE AREAS AWAY FROM UNPROTECTED AREAS AND SLOPES. TEMPORARY RIGHT-OF-WAY DIVERSION-STD. 3.11.....A RIDGE OF COMPACTED SOIL OR LOOSE ROCK OR GRAVEL CONSTRUCTED ACROSS DISTURBED RIGHTS-OF-WAY TO SHORTEN THE FLOW LENGTH WITHIN A SLOPING RIGHT-OF-WAY AND REDUCE EROSION

TEMPORARY SEDIMENT TRAP-STD. 3.13.....A TEMPORARY PONDING AREA FORMED BY CONSTRUCTING AN EARTHEN EMBANKMENT WITH A STONE OUTLET TO DETAIN SEDIMENT-LADEN RUNOFF FROM SMALL DISTURBED AREAS LONG ENOUGH TO ALLOW THE MAJORITY OF SEDIMENT TO SETTLE OUT.

ROCK CHECK DAMS-STD. 3.20....SMALL TEMPORARY STONE DAMS CONSTRUCTED ACROSS A SWALE OR DRAINAGE DITCH TO REDUCE VELOCITY OF CONCENTRATED STORMWATER FLOWS, THEREBY REDUCING EROSION OF THE SWALE OR DITCH.

TOPSOILING-STD. 3.30....METHODS OF PRESERVING AND USING THE SURFACE LAYER OF UNDISTURBED SOIL, OFTEN ENRICHED IN ORGANIC MATTER, IN ORDER TO OBTAIN A MORE DESIRABLE PLANTING AND GROWTH MEDIUM.

TEMPORARY SEEDING-STD. 3.31.....ESTABLISHMENT OF A TEMPORARY VEGETATIVE COVER ON DISTURBED AREAS THAT WILL NOT BE BROUGHT TO FINAL GRADE FOR PERIODS OF 30 DAYS TO 1-YEAR BY SEEDING WITH AN APPROPRIATE RAPIDLY GROWING SEED MIXTURE. PLEASE REFER TO SPECIFICATIONS ON SHEET C-6.

PERMANENT SEEDING-STD. 3.32....ESTABLISHMENT OF A VEGETATIVE COVER BY PLANTING SEED ON ALL FINAL GRADED AREAS THAT WILL NOT RECEIVE AN IMPERVIOUS COVER OR RECEIVE TOPSOIL MATERIAL TO PROVIDE A STABILIZED SITE AFTER THE PROJECT IS COMPLETE. PLEASE REFER TO SPECIFICATIONS ON SHEET C-6.

MULCHING-STD. 3.35....MULCH SHALL BE APPLIED TO ALL TEMPORARY AND PEMANENT SEEDING OPERATIONS TO PROMOTE THE GROWTH OF VEGETATION AND TO PROTECT THE SOIL SURFACE FROM RAINDROP IMPACTS.

A) CONSTRUCTION WILL BE SEQUENCED SO THAT GRADING OPERATIONS CAN BEGIN AND END AS QUICKLY AS POSSIBLE. B) SEDIMENT TRAPPING MEASURES WILL BE INSTALLED AS A FIRST STEP IN GRADING.

C) THE LOCAL PROGRAM ADMINISTRATOR RESERVES THE RIGHT TO ADD TO, DELETE OR OTHERWISE CHANGE THE EROSION CONTROL MEASURES AS DEEMED NECESSARY DUE TO ACTUAL FIELD CONDITIONS BY WRITTEN NOTIFICATION TO THE CONTRACTOR. D) ALL FILL AND CUT SLOPES SHALL BE SEEDED WITHIN SEVEN (7) DAYS OF ACHIEVING FINAL GRADE. E) ONLY AFTER INSPECTION AND APPROVAL FROM THE LOCAL PROGRAM ADMINISTRATOR MAY ITEMS BE REMOVED FOLLOWING THE

THE GENERAL CONTRACTOR SHALL INSPECT DISTURBED AREAS OF THE SITE THAT HAVE NOT BEEN FINALLY STABILIZED. AND AREAS USED FOR STORAGE OF MATERIALS THAT ARE EXPOSED TO PRECIPITATION, STRUCTURAL CONTROL MEASURES, AND THE AREA OF CONSTRUCTION VEHICLE ACCESS AT LEAST EVERY FOURTEEN (14) CALENDAR DAYS, AND WITHIN 48 HOURS OF THE END OF A STORM EVENT PRODUCING 1/2" OR GREATER OF PRECIPITATION. WHERE AREAS HAVE BEEN FINALLY OR TEMPORARILY STABILIZED OR RUNOFF IS UNLIKELY DUE TO WINTER CONDITIONS (SITE IS COVERED WITH SNOW, ICE, OR FROZEN GROUND EXISTS) SUCH INSPECTIONS SHALL BE CONDUCTED AT LEAST ONCE EVERY MONTH.

A) INSPECT DISTURBED AREAS AND AREAS OF MATERIALS STORAGE THAT ARE EXPOSED TO PRECIPITATION FOR EVIDENCE OF, OR THE POTENTIAL FOR SEDIMENT ENTERING THE STORM DRAIN SYSTEM. INSPECT E&S CONTROLS IN ACCORDANCE WITH REQUIREMENTS STATED HEREIN, AND INSPECT POINTS OF STORM DRAIN DISCHARGE FOR EXCESSIVE SEDIMENTATION. CORRECT SITE CONTROLS AS REQUIRED TO REDUCE SEDIMENTATION OF STORM DRAINS, CULVERTS, AND RECEIVING CHANNELS. B) IF CONTROLS OR SEDIMENT PREVENTION AREAS ARE FOUND TO BE IN NEED OF REPAIR OR MODIFICATION. THE GENERAL CONTRACTOR SHALL PROVIDE ADDITIONAL MEASURES OR MODIFICATIONS TO EXISTING MEASURES AS REQUIRED. ANY ADDITIONAL MEASURES OR MODIFICATIONS TO EXISTING MEASURES SHALL BE RECORDED AS FIELD REVISIONS TO THESE PLANS. IN THE EVENT THAT ADDITIONAL CONTROLS ARE FOUND TO BE REQUIRED, THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR IMPLEMENTING THESE CONTROLS BEFORE THE NEXT ANTICIPATED STORM EVENT. IF IMPLEMENTATION BEFORE THE NEXT STORM EVENT IS IMPRACTICAL. THEY SHALL BE IMPLEMENTED AS SOON AS PRACTICAL.

C) A REPORT SUMMARIZING THE SCOPE OF INSPECTIONS, NAME OF INSPECTOR, INSPECTOR'S QUALIFICATIONS, DATES OF INSPECTIONS. MAJOR OBSERVATIONS PERTAINING TO THE IMPLEMENTATION OF THESE EROSION CONTROL PLANS, AND ACTIONS TAKEN SHALL BE MADE AND RETAINED AS A PART OF THESE PLANS. MAJOR OBSERVATIONS OF THESE REPORTS SHALL INCLUDE: THE LOCATIONS OF EXCESSIVE SEDIMENTATION FROM THE SITE; LOCATIONS OF CONTROLS IN NEED OF REPAIR; LOCATIONS OF FAILED OR INADEQUATE CONTROLS: AND LOCATIONS WHERE ADDITIONAL CONTROLS ARE NEEDED.

STORMWATER MANAGEMENT: STORMWATER MANAGEMENT WILL BE HANDLED BY THE UNDERGROUND DETENTION SYSTEM AND STORMWATER QUALITY WILL BE HANDLED BY FILTERRA STORMWATER QUALITY INLETS AS SHOWN ON THE PLAN. THE MEASURES SHOWN ARE ADEQUATE AS PROVEN BY THE STORMWATER QUANTITY AND QUALITY CALCULATIONS PROVIDED IN THE ENGINEERING CALCULATIONS. AS SHOWN IN THE CALCULATIONS, THE STORMWATER MANAGEMENT SYSTEM HAS ENOUGH STORAGE TO HANDLE THE FUTURE PARKING EXPANSION WITH A CHANGE IN ORIFICE SIZE, UPON FUTURE EXPANSION OF THE PARKING AREA, ADDITIONAL STORMWATER QUALITY MEASURES MAY BE REQUIRED.

CONSTRUCTION SEQUENCING NOTES:

PHASE 1:

- 1. THE CONSTRUCTION ENTRANCE TO BE INSTALLED AS A FIRST STEP.
- 2. SILT FENCE TO BE INSTALLED AS SHOWN ON THE PLANS. 3. SEDIMENT TRAP AND DIVERSIONS TO BE INSTALLED.

PHASE 2:

- 1. TOPSOIL SHALL BE STRIPPED AND STOCKPILED AND SEEDED AND SURROUNDED BY SILT FENCE. 2. MAJOR GRADING OPERATIONS SHALL BE PERFORMED AT THIS TIME AND UTILITIES SHALL BE
- INSTALLED. INLET PROTECTION MUST BE PROVIDED IMMEDIATELY AFTER INSTALLATION OF THE PROPOSED
- INLETS AND CULVERTS ON-SITE. 3. TEMPORARY SEEDING MUST BE PROVIDED FOR ALL DISTURBED AREAS THAT WILL REMAIN DORMANT
- FOR MORE THAN 30 DAYS. PERMANENT SEEDING, MULCHING, AND BLANKET MATTING TO BE PROVIDED
- FOR ALL APPLICABLE AREAS AS SOON AS POSSIBLE AFTER FINAL GRADE IS ACHIEVED. 4. CONSTRUCTION OF THE BUILDING SHALL BE PERFORMED AT THIS TIME.
- 5. PAVEMENT SHALL BE INSTALLED AT THIS TIME.
- 6. TOPSOIL AND SEEDING SHALL BE APPLIED TO LANDSCAPE AREAS AS NECESSARY. 7. WHEN THE ENTIRE SITE IS STABILIZED, SILT FENCE CAN BE REMOVED.
- *NOTE: ROANOKE COUNTY INSPECTION AND APPROVAL IS REQUIRED PRIOR TO THE REMOVAL OF

EROSION AND SEDIMENT CONTROL MEASURES.

MINIMUM STANDARDS

THE FOLLOWING STANDARDS ARE TO BE PROVIDED OR ADDRESSED ON EVERY DEVELOPMENT PROJECT EXCEEDING 5000 S.F. IN AREA OF DISTURBANCE THESE STANDARDS ARE CONSIDERED A MINIMUM AND MAY REQUIRE ADDITIONAL MEASURES AS DEEMED NECESSARY BY THE LOCAL APPROVING AUTHORITY OR THE CONSULTING ENGINEER.


No.	CRITERIA, TECHNIQUE OR METHOD	PRACTICES PROVIDED
1	PERMANENT OR TEMPORARY SOIL STABILIZATION SHALL BE APPLIED TO DENUDED AREAS WITHIN SEVEN (7) DAYS AFTER FINAL GRADE HAS BEEN REACHED ON ANY PORTION OF THE SITE. TEMPORARY SOIL STABILIZATION SHALL BE APPLIED WITHIN SEVEN (7) DAYS. TO DENUDED AREAS THAT MAY BE AT FINAL GRADE BUT WILL REMAIN DORMANT (UNDISTURBED) FOR LONGER THAN THIRTY (30) DAYS. PERMANENT STABILIZATION SHALL BE APPLIED TO AREAS THAT ARE TO BE LEFT DORMANT FOR MORE THAN ONE (1) YEAR.	TS PS MU FOR ALL DENUDED AREAS
2	DURING CONSTRUCTION OF THE PROJECT, SOIL STOCKPILES SHALL BE STABILIZED OR PROTECTED WITH SEDIMENT TRAPPING MEASURES. THE CONTRACTOR IS RESPONSIBLE FOR THE TEMPORARY PROTECTION AND PERMANENT STABILIZATION OF ALL SOIL STOCKPILES ON SITE AS WELL AS SOIL INTENTIONALLY TRANSPORTED FROM THE PROJECT SITE.	TS PS MU FOR PROVIDED STOCKPILE
3	A PERMANENT VEGETATIVE COVER SHALL BE ESTABLISHED ON DENUDED AREAS NOT OTHERWISE PERMANENTLY STABILIZED. PERMANENT VEGETATION SHALL NOT BE CONSIDERED ESTABLISHED UNTIL A GROUND COVER IS ACHIEVED THAT, IN THE OPINION OF THE LOCAL PROGRAM ADMINISTRATOR OR DESIGNATED AGENT, IS UNIFORM, MATURE ENOUGH TO SURVIVE AND WILL INHIBIT EROSION.	TS PS MU FOR ALL DENUDED AREAS
4	SEDIMENT BASINS AND TRAPS, PERIMETER DIKES, SEDIMENT BARRIERS AND OTHER MEASURES INTENDED TO TRAP SEDIMENT SHALL BE CONSTRUCTED AS A FIRST STEP IN ANY LAND-DISTURBING ACTIVITY AND SHALL BE MADE FUNCTIONAL BEFORE UPSLOPE LAND DISTURBANCE TAKES PLACE.	ST SF DD FOR ALL DRAINAGE DIVIDES
5	STABILIZATION METHODS SHALL BE APPLIED TO EARTHEN STRUCTURES SUCH AS DAMS, DIKES AND DIVERSIONS IMMEDIATELY AFTER INSTALLATION.	TS PS MU FOR ALL EARTHEN STRUCTURES
6	SEDIMENT TRAPS AND BASINS SHALL BE DESIGNED AND CONSTRUCTED BASED UPON THE TOTAL DRAINAGE AREA TO BE SERVED BY THE TRAP OR BASIN.	SELF - EXPLANATORY
7	CUT AND FILL SLOPES SHALL BE CONSTRUCTED IN A MANNER THAT WILL MINIMIZE EROSION. SLOPES THAT ARE FOUND TO BE ERODING EXCESSIVELY WITHIN ONE (1) YEAR OF PERMANENT STABILIZATION SHALL BE PROVIDED WITH ADDITIONAL SLOPE STABILIZATION MEASURES UNTIL THE PROBLEM IS CORRECTED.	TS PS MU FOR ALL ERODING SLOPES
8	CONCENTRATED RUNOFF SHALL NOT FLOW DOWN CUT OR FILL SLOPES UNLESS CONTAINED WITHIN AN ADEQUATE TEMPORARY OR PERMANENT CHANNEL, FLUME OR SLOPE DRAIN STRUCTURE.	DD
9	WHENEVER WATER SEEPS FROM A SLOPE FACE, ADEQUATE DRAINAGE OR OTHER PROTECTION SHALL BE PROVIDED.	SHOULD SEEPS OCCUR IN ANY EXISTING OR NEW CUT OR FILL SLOPE, THE CONTRACTOR SHALL FIRST INSUF THAT THERE ARE NOT AREAS OF PONDED WATER AT THE TOPS OF THE SLOPES, AND THEN SHALL CONTAC BOTH THE DESIGN ENGINEER AND THE PROJECT GEOTECHNICAL ENGINEER FOR ON-SITE EVALUATION OF
10	ALL STORM SEWER INLETS THAT ARE MADE OPERABLE DURING CONSTRUCTION SHALL BE PROTECTED SO THAT SEDIMENT-LADEN WATER CANNOT ENTER THE CONVEYANCE SYSTEM WITHOUT FIRST BEING FILTERED OR OTHERWISE TREATED TO REMOVE SEDIMENT.	THE AREAS OF SEEPAGE.
11	BEFORE NEWLY CONSTRUCTED STORMWATER CONVEYANCE CHANNELS ARE MADE OPERATIONAL, ADEQUATE OUTLET PROTECTION AND ANY REQUIRED TEMPORARY OR PERMANENT CHANNEL LINING SHALL BE INSTALLED IN BOTH THE CONVEYANCE CHANNEL AND RECEIVING CHANNEL.	OP)
12	WHEN WORK IN A LIVE WATERCOURSE IS PERFORMED, PRECAUTIONS SHALL BE TAKEN TO MINIMIZE ENCROACHMENT, CONTROL SEDIMENT TRANSPORT AND STABILIZE THE WORK AREA TO THE GREATEST EXTENT POSSIBLE DURING CONSTRUCTION. NONERODIBLE MATERIAL SHALL BE USED FOR THE CONSTRUCTION OF CAUSEWAYS AND COFFERDAMS. EARTHEN FILL MAY BE USED FOR THESE STRUCTURES IF ARMORED BY NONERODIBLE COVER MATERIALS.	NOT APPLICABLE NO CREEKS ON-SITE
13	WHEN A LIVE WATERCOURSE MUST BE CROSSED BY CONSTRUCTION VEHICLES MORE THAN TWICE IN ANY SIX (6) MONTH PERIOD, A TEMPORARY STREAM CROSSING CONSTRUCTED OF NONERODIBLE MATERIAL.	NOT APPLICABLE NO CREEKS ON-SITE
14	ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS PERTAINING TO WORKING IN OR CROSSING LIVE WATERCOURSES SHALL BE MET. THE BEDS AND BANKS OF ANY WATERCOURSE SHALL BE STABILIZED IMMEDIATELY AFTER WORK IN THE WATERCOURSE IS COMPLETED.	NOT APPLICABLE NO CREEKS ON-SITE
15	THE BEDS AND BANKS OF A WATERCOURSE SHALL BE STABILIZED IMMEDIATELY AFTER WORK IN THE WATERCOURSE IS COMPLETED.	NOT APPLICABLE NO CREEKS ON-SITE
16	UNDERGROUND UTILITY LINES SHALL BE INSTALLED IN ACCORDANCE WITH THE FOLLOWING STANDARDS IN ADDITION TO OTHER APPLICABLE CRITERIA: 1)NO MORE THAN 500 LINEAR FEET OF ANY TRENCH MAY BE OPENED AT ONE TIME. 2)EXCAVATED MATERIAL SHALL BE PLACED ON THE UPHILL SIDE OF TRENCHES. 3)EFFLUENT FROM DEWATERING OPERATIONS SHALL BE FILTERED OR PASSED THROUGH AN APPROVED SEDIMENT TRAPPING DEVICE, OR BOTH, AND DISCHARGED IN A MANNER THAT DOES NOT ADVERSELY AFFECT FLOWING STREAMS OR OFF—SITE PROPERTY. 4)MATERIAL USED FOR BACKFILLING TRENCHES SHALL BE PROPERLY COMPACTED IN ORDER TO MINIMIZE EROSION AND PROMOTE STABILIZATION. 5)RESTABILIZATION SHALL BE ACCOMPLISHED IN ACCORDANCE WITH THESE REGULATIONS. 6)APPLICABLE SAFETY REGULATIONS SHALL BE COMPLIED WITH.	DS
17	WHERE CONSTRUCTION VEHICLE ACCESS ROUTES INTERSECT PAVED OR PUBLIC ROADS, PROVISIONS SHALL BE MADE TO MINIMIZE THE TRANSPORT OF SEDIMENT BY VEHICULAR TRACKING ONTO THE PAVED SURFACE. WHERE SEDIMENT IS TRANSPORTED ONTO A PAVED OR PUBLIC ROAD SURFACE, THE ROAD SURFACE SHALL BE CLEANED THOROUGHLY AT THE END OF EACH DAY. SEDIMENT SHALL BE REMOVED FROM THE ROADS BY SHOVELING OR SWEEPING AND TRANSPORTED TO A SEDIMENT CONTROL DISPOSAL AREA. STREET WASHING SHALL BE ALLOWED ONLY AFTER SEDIMENT IS REMOVED IN THIS MANNER.	CE) FOR ALL POINTS OF INGRESS/EGRESS
18	ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES SHALL BE REMOVED WITHIN THIRTY (30) DAYS AFTER FINAL SITE STABILIZATION OR AFTER THE TEMPORARY MEASURES ARE NO LONGER NEEDED, UNLESS OTHERWISE AUTHORIZED BY THE LOCAL PROGRAM ADMINISTRATOR. TRAPPED SEDIMENT AND THE DISTURBED SOIL AREAS RESULTING FROM THE DISPOSITION OF TEMPORARY MEASURES SHALL BE PERMANENTLY STABILIZED TO PREVENT FURTHER EROSION AND SEDIMENTATION.	TS PS MU REFER TO ESC NARRATIVE MANAGEMENT STRATEGIES (NOTE E) ON THIS SHEET
19	PROPERTIES AND WATERWAYS DOWNSTREAM FROM DEVELOPMENT SITES SHALL BE PROTECTED FROM SEDIMENT DEPOSITION, EROSION AND DAMAGE DUE TO INCREASES IN VOLUME, VELOCITY AND PEAK FLOW RATE OF STORMWATER RUNOFF FOR THE STATED FREQUENCY STORM OF 24—HOUR DURATION IN ACCORDANCE WITH THE APPLICABLE CRITERIA.	SEE ENGINEERING CALCULATIONS


DITCH 'B' DETAIL

DITCH 'C' DETAIL

,– MIN. DEPTH=16′

- NEW V-DITCH no lining req'd





www.balzer.cc PLANNERS • ARCHITECTS ENGINEERS • SURVEYORS

1208 Corporate Circle Roanoke, Virginia 24018 Phone: 540/772-9580 FAX: 540/772-8050

15871 City View Drive Midiothian, Virginia 23113 FAX: 804/794-2635

380 Technology Park Drive Glen Allen, Virginia 23059 Phone: 804/553-0132 FAX: 804/553-0133

448 Peppers Ferry Road, NW Christiansburg, Virginia 24073 Phone⁻ 540/381-4290 FAX: 540/381-4291

1561 Commerce Road Verona, Virginia 24482 Phone, 540/248-3220 FAX: 540/248-3221

S

DRAWN BY: CPB DESIGNED BY: CPB CHECKED BY: SMH **DATE:** 10-14-2008

REVISIONS: 11-19-2008 12-10-2008

SCALE: N/A

SHEET NO.

JOB NO. R0800339.00

DITCH 'A' DETAIL

- NEW V-DITCH

EC-2 LINING REQ'D

-NEW TRAP DITCH