


PHASE 1 CONSTRUCTION SEQUENCE:

1. THE CONSTRUCTION ENTRANCE SHALL BE INSTALLED FROM THE EXISTING GRAVEL ACCESS ROAD AS THE FIRST STEP IN CONSTRUCTION. THIS CONSTRUCTION ENTRANCE SHALL BE USED AS LONG AS PRACTICAL TO ENSURE NO MUD TRACKING ONTO THE PUBLIC ROADS.
2. SILT FENCE TO BE INSTALLED AROUND THE PERIMETER OF THE SITE AS SHOWN. THE SILT FENCE SHALL BE MAINTAINED THROUGHOUT THE DURATION OF THE PROJECT. THE R.O.D. ASSIGNED TO THE PROJECT SHALL ENSURE ALL NEIGHBORS ARE FOLLOWED TO THE MAINTENANCE OF THE SILT FENCE THROUGHOUT ALL PHASES OF THE PROJECT.
3. INLET PROTECTION SHALL BE INSTALLED ON THE EXISTING STORMWATER INLETS AS SHOWN TO PROTECT THE EXISTING STORM SEWER FROM SEDIMENT. THE INLET PROTECTION SHALL BE MAINTAINED THROUGHOUT CONSTRUCTION TO ENSURE SEDIMENT LADEN RUNOFF IS DIRECTED TO THE TEMPORARY SEDIMENT TRAP BEFORE LEAVING THE SITE.
4. SITE DEMOLITION OPERATIONS SHALL TAKE PLACE AT THIS TIME. G.C. TO OBTAIN APPROPRIATE DEMOLITION PERMITS AS REQUIRED FOR THE PROJECT FROM ALL LOCAL AND STATE REGULATORY AGENCIES.
5. G.C. SHALL PAY SPECIAL ATTENTION TO ENSURE SEDIMENT LADEN RUNOFF IS NOT DIRECTED TOWARDS THE ADJACENT PUBLIC RIGHT OF WAY AND THERE SHALL BE NO MUD TRACKING FROM THE SITE INTO THE PUBLIC RIGHT OF WAY.
6. TEMPORARY SEEDING SHALL BE PROVIDED FOR ALL AREAS THAT WILL NOT RECEIVE PAVEMENT OR OTHER PERMANENT IMPROVEMENTS WITHIN 14 DAYS.
7. NO DEVIATIONS TO THE PLANS SHALL TAKE PLACE UNLESS PRIOR APPROVAL FROM THE DEVELOPER, PROJECT ENGINEER, AND BOTETOURT COUNTY INSPECTOR HAS BEEN OBTAINED.
8. ADDITIONAL EROSION CONTROL MEASURES ARE SHOWN ON THE PHASE 2 EROSION AND SEDIMENT CONTROL PLAN ON SHEET C06. DETAILS AND NOTES HAVE BEEN PROVIDED ON SHEETS C07 AND C08 TO ACCOMPANY THE PLAN AND NARRATIVE.
9. G.C. SHALL ENSURE THAT THE LIMITS OF DISTURBANCE ARE STRICTLY ADHERED TO DURING THE PROJECT.

PHASE 1 E&S MEASURES

3.02	TEMPORARY STONE CONSTRUCTION ENTRANCE	CE
3.05	SILT FENCE	SF
3.07	STORM DRAIN INLET PROTECTION	IP
3.09	TEMPORARY DIVERSION DIKE	DD
3.13	TEMPORARY SEDIMENT TRAP	ST
3.31	TEMPORARY SEEDING	TS

BOTETOURT FAMILY YMCA  
ESC PLAN - PHASE 1  
AMSTERDAM DISTRICT  
BOTETOURT COUNTY, VIRGINIA

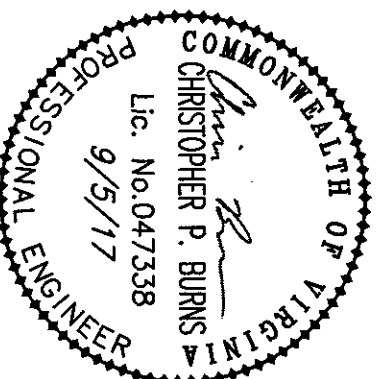

Balzer and Associates, Inc.  
1208 Corporate Circle  
Roanoke, VA 24018  
540-772-9580  
FAX 540-772-9050

BALZER  
AND ASSOCIATES, INC.  
www.balzer.cc  
Roanoke  
New River Valley  
Richmond  
Harrisonburg  
RESIDENTIAL LAND DEVELOPMENT ENGINEERING  
SITE SPECIFIC ENGINEERING  
LANDSCAPE ARCHITECTURE  
LAND SURVEYING  
ARCHITECTURE  
STRUCTURAL ENGINEERING  
ENVIRONMENTAL & SOIL SCIENCE  
WETLAND DEMARCATIONS & STREAM EVALUATIONS  
REFLECTING TOPOGRAPHY

SHEET NO. C05  
JOB NO. 03170044.00  
DRAWN BY: CPB  
DESIGNED BY: CPB  
CHECKED BY: BIC  
DATE: 7/17/2017  
SCALE: 1"=20'  
REVISIONS: 9/5/2017